

# "High Frequency Ceramic Solutions"

Preliminary

## 1.175 GHz Low Pass Filter

P/N 1175LP15A0550

Detail Specification: 12/16/08

Page 1 of 2

### General Specifications

Part Number	1175LP15A0550
Frequency (MHz)	900~1450
Insertion Loss	2.5 dB max.
Return Loss	9.5 dB min.
Ripple (dB)	1.8 max. @ 900~1450MHz
	0.34 max. @ 1425~1450MHz (+25°C)
	0.40 max. @ 1425~1450MHz (-40~+85°C)
	1.0 max. @ 1450~1475MHz

Attenuation (min.)	25 dB @ 1650 - 2200 MHz
Input Power	1W max.
Impedance	50 Ω
Operating Temperature	-40 to +85°C
Storage Temperature	+5 ~ +35 °C, 12 mos max. Humidity 45~75%RH


P/N	Packaging Style	Bulk	Suffix = S	Eg. 1175LP15A0550S
		T & R	Suffix = E	Eg. 1175LP15A0550E
Suffix	Termination Style	100% Tin	Suffix = None	Eg. 1175LP15A0550(E or S)
		Tin / Lead	Suffix = /Pb	Eg. 1175LP15A0550(E or S)/Pb

### Terminal Configuration


No.	Function
1	IN
2	GND
3	OUT
4	GND

### Mechanical Dimensions

	In	mm
L	0.079 ± 0.006	2.00 ± 0.15
W	0.049 ± 0.004	1.25 ± 0.10
T	0.037 ± 0.004	0.95 ± 0.10
a	0.051 ± 0.006	1.30 ± 0.15
b	0.012 ± 0.006	0.30 ± 0.15
c	0.010 +.004/-0.006	0.25 +0.1/-0.15
d	0.014 ± 0.006	0.35 ± 0.15

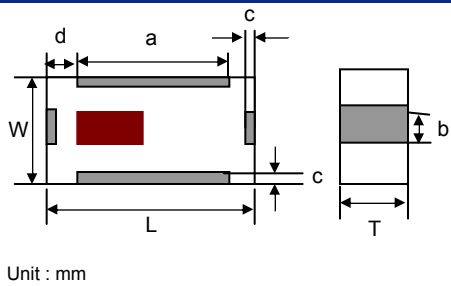

Unit : mm




### Mounting Considerations

Mount these devices with brown mark facing up.

\*Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

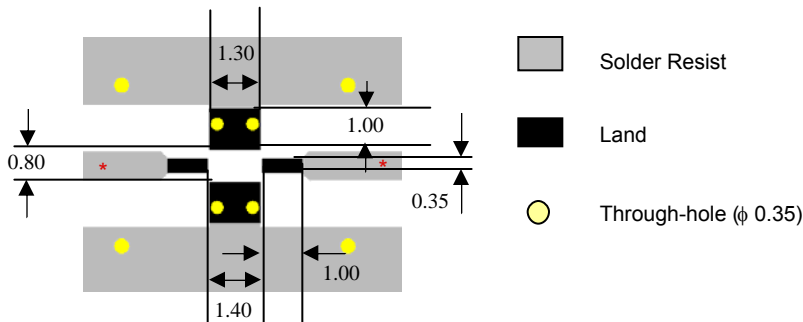

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved

# "High Frequency Ceramic Solutions"

Preliminary


1.175 GHz Low Pass Filter

P/N 1175LP15A0550

Detail Specification: 12/16/08

Page 2 of 2

Typical Electrical Performance (T=25°C)

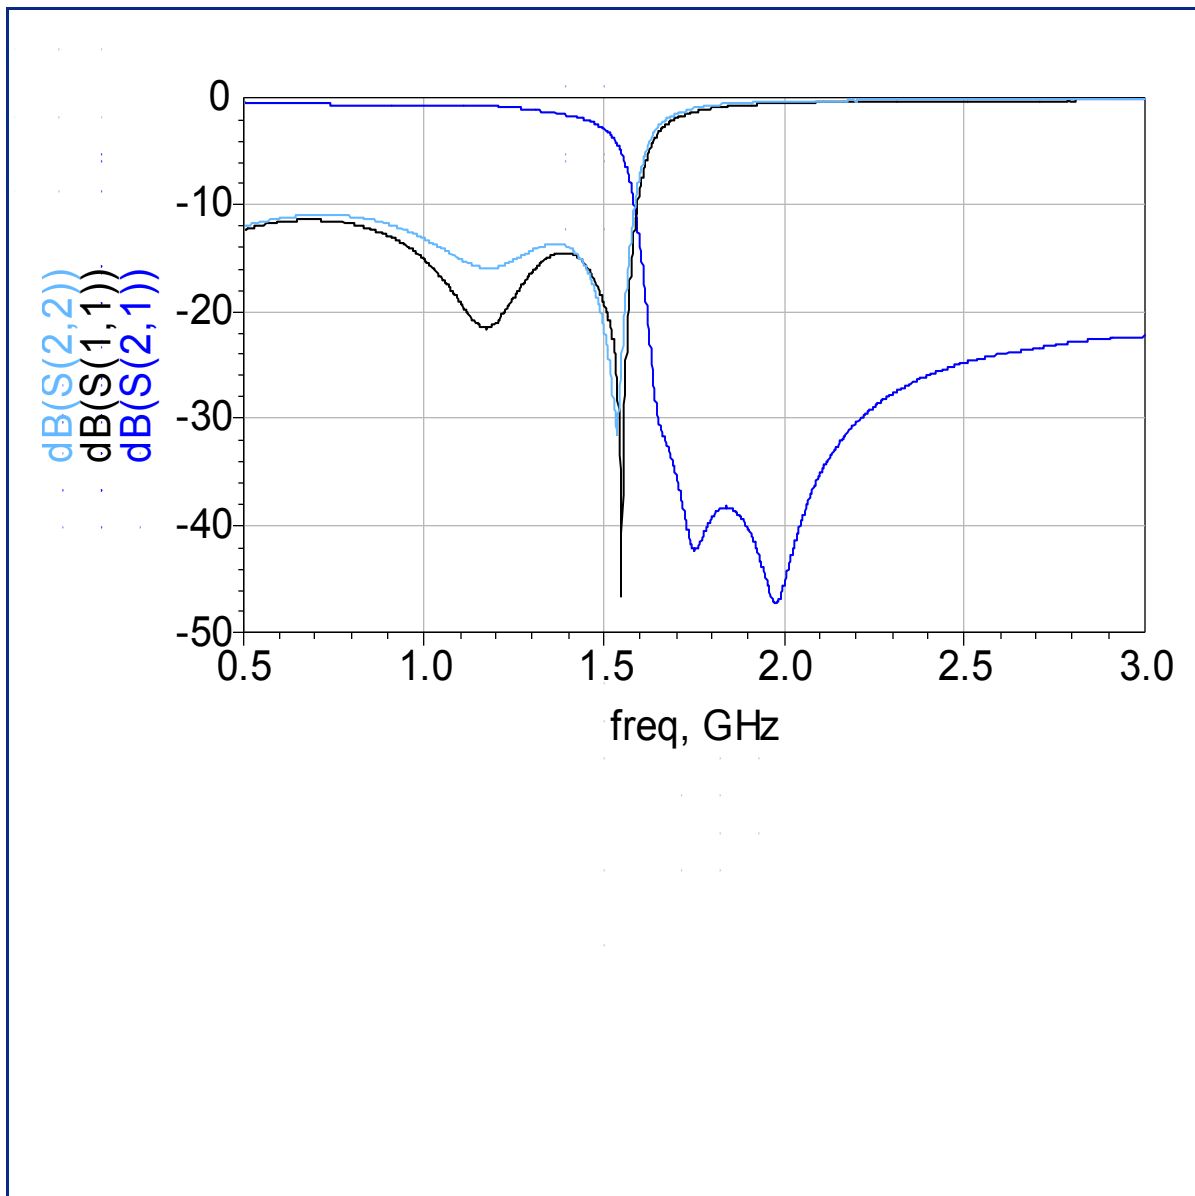

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2008 Johanson Technology, Inc. All Rights Reserved

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9