



# 201-XXX-SP SERIES


## Single-phase voltage/phase monitor



### Wiring Diagram

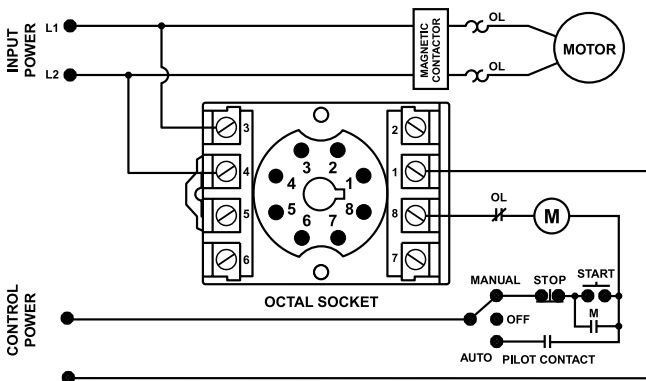

PIN-OUT 1 (201-XXX-SP)  
(view of socket)



PIN-OUT 2 (201-200-SP-T-9)  
(view of socket)

### Description

The 201-xxx-SP Series is an 8-pin octal-base, plug-in voltage monitor designed to protect single-phase motors regardless of size. The 201-100-SP is used on 95-120VAC, 50/60Hz motors to prevent damage caused by low voltage. The 201-200-SP is used on 190-240VAC, 50/60Hz motors. The 201-200-SP-T-9 is a pin-for-pin replacement for a Time Mark® #260 Series voltage monitor. High voltage protection is included in the 201-200-SP-T-9.

The unique microcontroller-based voltage and voltage-sensing circuit constantly monitors the voltage to detect harmful power line conditions. When a harmful condition is detected, the MotorSaver's output relay is deactivated after a specified trip delay. The output relay reactivates after power line conditions return to an acceptable level and a specified amount of time has elapsed (restart delay). The trip delay prevents nuisance tripping due to rapidly fluctuating power line conditions.

#### Must use Model OT08PC socket for UL Rating!

Note: Manufacturer's recommended screw terminal torque for the RB Series and OT Series Octal Sockets is 12 in.-lbs.

### Features & Benefits

FEATURES	BENEFITS
<b>Proprietary microcontroller based circuitry</b>	Constant monitoring of voltage to detect harmful power line conditions, even before the motor starts
<b>Fixed trip delay 4s</b>	Prevents nuisance tripping due to rapidly fluctuating power line conditions
<b>Advanced LED indication</b>	Provides diagnostics which can be used for troubleshooting and to determine relay status
<b>Compact design for 8-pin; DIN rail or surface mount</b>	Allows flexibility in panel installation

### Accessories



#### OT08PC 8-pin Octal Socket

Octal Socket for plug-in units. 8-pin surface & DIN rail mountable. Rated for 10A @ 600VAC.

### Ordering Information

MODEL	LINE VOTAGE	DESCRIPTION
201-100-SP	95-120VAC	SPDT, protects single phase motors
201-200-SP	190-240VAC	SPDT, protects single phase motors
201-200-SP-T-9	190-240VAC	SPDT, direct replacement for Time Mark® #260 series

## 201-XXX-SP SERIES

### Specifications

#### Input Characteristics

**Line Voltage:**

<b>201-100-SP</b>	95-120VAC
<b>201-200-SP, 201-200-SP-T-9</b>	190-240VAC
<b>Frequency</b>	50/60Hz

#### Functional Characteristics

**Low Voltage (% of setpoint)**

<b>Trip</b>	90%
<b>Reset</b>	93%

**For 201-200-SP-T-9 only:**

**High Voltage (% of setpoint)**

<b>Trip</b>	110%
<b>Reset</b>	107%

**Trip Delay Time:**

<b>High/Low Voltage Fault</b>	4 seconds
-------------------------------	-----------

**Restart Delay Time:**

<b>After a Fault</b>	2 seconds
<b>After a Complete Power Loss</b>	2 seconds

#### Output Characteristics

**Output Contact Rating (SPDT)**

<b>Pilot Duty</b>	480VA @ 240VAC
<b>General Purpose</b>	10A @ 240VAC

#### General Characteristics

**Ambient Temperature Range**

**Operating** -40° to 70°C (-40° to 158°F)

**Storage** -40° to 80°C (-40° to 176°F)

**Maximum Input Power** 5 W

**Transient Protection (Internal)** 2500V for 10 ms

#### Safety Marks

**UL (OT08PC octal socket required)**

UL508 (File #E68520)

**CE**

IEC 60947-6-2

#### Dimensions

**H** 44.45 mm (1.75"); **W** 60.325 mm (2.375");  
**D** 104.775 mm (4.125") (with socket)

#### Weight

0.8 lb. (12.8 oz., 362.87 g)

#### Mounting Method

DIN rail or surface mount  
(plug in to OT08PC socket)

#### Socket Available

Model OT08PC (UL Rating 600V)

The 600V socket can be surface mounted or installed on DIN Rail.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9