



### »» Features

- 70A high power automotive relay.
- High temperature endurance up to 125 degree C.
- Optional to be equipped with protection diode or resistor.
- Dust cover version, flux free type, sealed & weather proof type or flange cover version to be chosen.
- Tinned terminal is available on request.
- Comply with RoHS-Directive 2002/95/EC, and ELV-Directive 2000/53/EC.

### »» Type List

| Terminal style  | Contact form | Designation (provided with) | Enclosure style |               |                      |
|-----------------|--------------|-----------------------------|-----------------|---------------|----------------------|
|                 |              |                             | Dust cover      | Flux tight    | Sealed type washable |
| Socket terminal | 1A<br>(SPNO) | -----                       | 897-1AH-D       | 897-1AH-C     | 897-1AH-S            |
|                 |              | Resistor                    | 897-1AH-D-R1    | 897-1AH-C-R1  | 897-1AH-S-R1         |
| PCB terminal    | 1A<br>(SPNO) | -----                       | 897P-1AH-D      | 897P-1AH-C    | 897P-1AH-S           |
|                 |              | Resistor                    | 897P-1AH-D-R1   | 897P-1AH-C-R1 | 897P-1AH-S-R1        |

| Terminal style  | Contact form | Designation (provided with) | Enclosure style            |                            |
|-----------------|--------------|-----------------------------|----------------------------|----------------------------|
|                 |              |                             | Flanged cover (dust cover) | Flanged cover (flux tight) |
| Socket terminal | 1A<br>(SPNO) | -----                       | 897-1AH-D1                 | 897-1AH-C1                 |
|                 |              | Resistor                    | 897-1AH-D1-R1              | 897-1AH-C1-R1              |

| Terminal style  | Contact form | Designation (provided with) | Enclosure style            |                            |
|-----------------|--------------|-----------------------------|----------------------------|----------------------------|
|                 |              |                             | Steel bracket (dust cover) | Steel bracket (flux tight) |
| Socket terminal | 1A<br>(SPNO) | -----                       | 897-1AH-D1S                | 897-1AH-C1S                |
|                 |              | Resistor                    | 897-1AH-D1S-R1             | 897-1AH-C1S-R1             |

| Terminal style  | Contact form | Designation (provided with) | Enclosure style                        |   |
|-----------------|--------------|-----------------------------|--|---|
|                 |              |                             | Steel bracket (dust cover with shroud) | Steel bracket (dust cover with weather proof) |
| Socket terminal | 1A<br>(SPNO) | Resistor                    | 897-1AH-D1SF-R1                        | 897-1AH-D1SW-R1                               |

### »» Ordering Information

897      P    -    1AH    -    C    -    R1    -    T            001  
 1        2        3        4        5        6        7

- |          |   |      |   |
|----------|---|------|---|
| 1. 897   | -- Basic series designation                             | 4. D | -- Dust cover                           |
| 2. Blank | -- Socket terminal                                      | C    | -- Flux tight                           |
| P        | -- PCB terminal   | S    | -- Sealed type washable                 |
| 3. 1AH   | -- Single pole normally open,<br>contact material AgSnO | D1   | -- Flanged cover (dust cover)           |
|          |   | C1   | -- Flanged cover (flux tight)           |
|          |   | S1   | -- Flanged cover (sealed type washable) |
|          |   | D1S  | -- Steel bracket (dust cover)           |

- |   |   |
|---|---|
| C1S -- Steel bracket (flux tight)                               | 6. Blank -- Standard type   |
| S1S -- Steel bracket (sealed type washable)                     | <b>T</b> -- Special requirement for Tin plated terminal                       |
| D1SF -- Steel bracket (dust cover with shroud)                  |   |
| D1SW -- Steel bracket (dust cover with weather proof)           | 7. Blank -- Standard type   |
| 5. Blank -- Standard type                                       | 001 -- Coil parallel with diode IN4007 the positive pole "+" on # 85 terminal |
| R1 -- Coil parallel with resistor 1/2W for 12V 680Ω , 24V 2700Ω | 002 -- Coil parallel with diode IN4007 the negative pole "-" on # 85 terminal |

## »» Contact Rating

|                         |                      |
|-------------------------|----------------------|
| Max. Continuous current | 70A 14VDC, 25A 28VDC |
|-------------------------|----------------------|

## »» Coil Rating (DC)

| Rated voltage (V) | Rated current ±10 % at 23 °C (mA) | Coil resistance ±10 % at 23 °C (Ω) | Max. continuous Voltage at 85 °C <sup>(1)</sup> | Pick up voltage(Max) at 23 °C | Drop out voltage(Min) at 23 °C | Power consumption at rated voltage |
|-------------------|-----------------------------------|------------------------------------|---|-------------------------------|--------------------------------|------------------------------------|
| 12                | 133                               | 90                                 | 100 % of  | 65 % of                       | 10 % of                        | approx. 1.6W                       |
| 24                | 66.7                              | 360                                | rated   | rated                         | rated                          |                                    |
|                   |                                   |                                    | voltage   | voltage                       | voltage                        |                                    |

Notes : (1) Continuous contact current at 50A.

## »» Specification

|                                      |                          |   |
|--------------------------------------|--------------------------|---|
| Contact material                     | AgSnO alloy              |   |
| Contact voltage drop <sup>(1)</sup>  | Typ. 30mV at 10A         |   |
| Insulation resistance <sup>(1)</sup> | 20 MΩ Min. (DC 500V)     |   |
| Operate time <sup>(1)</sup>          | 20ms Max.                |   |
| Release time <sup>(1)</sup>          | 20ms Max.                |   |
| Dielectric strength <sup>(1)</sup>   | Between open contact     | : AC 500V , 50/60Hz 1 min.                                |
|                                      | Between contact and coil | : AC 500V , 50/60Hz 1 min.                                |
| Vibration resistance                 | Operating extremes       | 10~55Hz , amplitude 2mm                                   |
| Shock resistance                     | Operating extremes       | 10G   |
|                                      | Damage limits            | 100G  |
| Life expectancy                      | Mechanical               | 10,000,000 operations<br>(frequency 18,000 operations/hr) |
|                                      | Electrical               | 100,000 operations<br>(frequency 1,200 operations/hr)     |
| Temperature range                    | Operating                | -40~+125 °C (no freezing)                                 |
| Weight                               | Approx. 40 g             |   |

Note : (1) initial value

»» Outline Dimensions

◆ 897 (C,D,S)



◆ 897 (C1,D1,S1)



◆ 897 (C1S,D1S,S1S)



## ◆897 (D1SW)



## ◆897 (D1SF)



## ◆897P (C,D,S)



## »» Wiring Diagram

BOTTOM VIEW


1A




R1



001




002




## »» PC Board Layout

BOTTOM VIEW

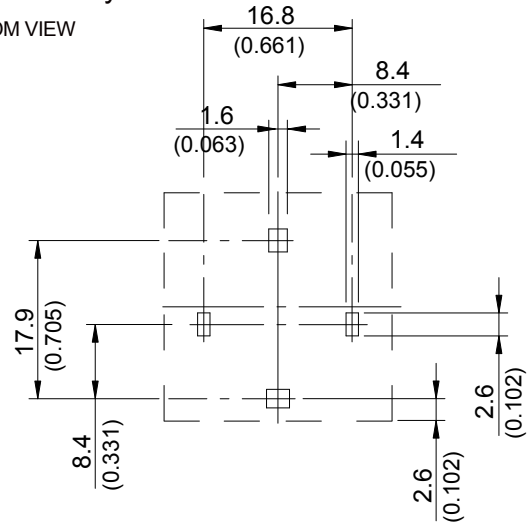

## »» Engineering Data

Safe breaking, arc extinguished  
(normally open contact) for resistive loads.

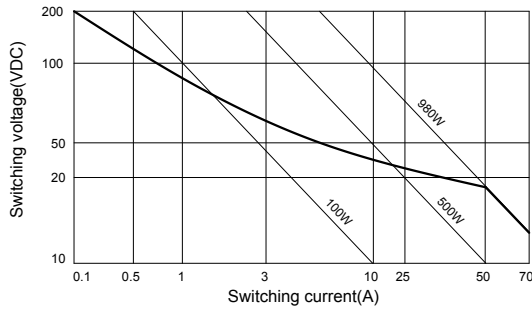

Life expectancy



Life expectancy



Ambient temperature vs coil voltage for continuous duty



Operate time/Release time



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9