

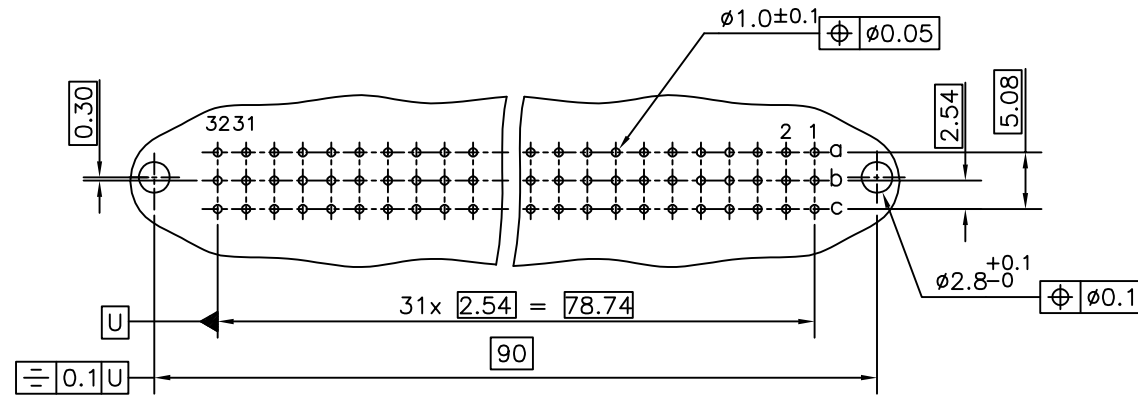


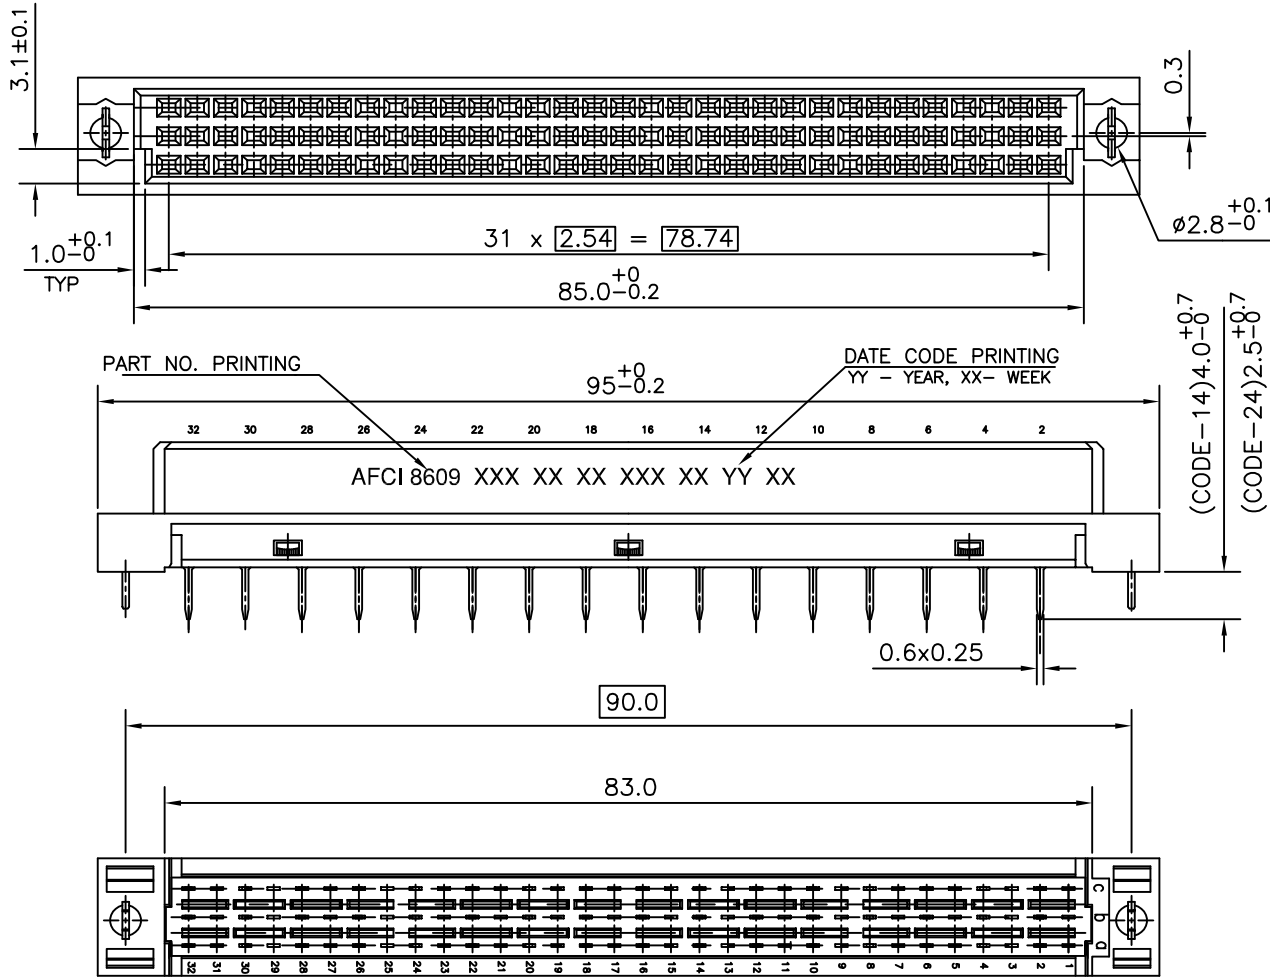

- NOTES:
1. THE "LF" PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004.
 2. LEAD FREE OR RoHS DIRECTIVE LABELING TO BE PROVIDED AS PER GS-14-920 FOR LEAD FREE VERSION.
 3. FOR GENERAL CHARACTERISTICS AND RoHS INFORMATION, REFER DRAWING C-8609-0000A.

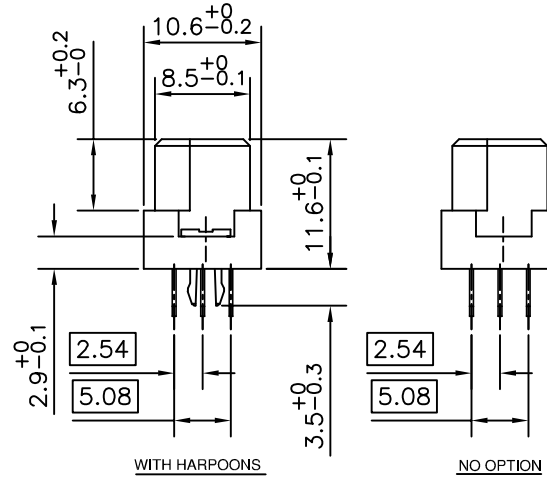

TECHNICAL SPECIFICATION	
INSULATOR MATERIAL	: POLYESTER THERMOPLASTIC UL94V-0, GREY
	HOUSING CAN WITHSTAND EXPOSURE TO LEAD FREE WAVE SOLDERING TEMPERATURE OF 260-265°C FOR STRAIGHT CONNECTORS AS IT IS IN CLASSICAL LEAD WAVE SOLDERING AT 235-250°C
CONTACT / HARPOON MATERIAL	: COPPER ALLOY
CONTACT PLATING	
ACTIVE ZONE	: Au / GXT™ OVER NICKEL
TERMINATION ZONE	
LEAD FREE VERSION	: TIN (PURE MATTE) OVER NICKEL
HARPOON PLATING	
LEAD FREE VERSION	: TIN (PURE MATTE) OVER NICKEL
ELECTRICAL DATA	
CURRENT RATING AT 20°C	: 1.5 A
CURRENT (I MAX)	: 2 A
TEMPERATURE RANGE	: -55°C/+125°C
CONTACT RESISTANCE	: ≤ 20mΩ
INSULATION RESISTANCE	: ≥ 10 ⁹ MΩ
TEST VOLTAGE (rms)	: 1000V
MECHANICAL DATA	
INSERTION FORCE PER CONTACT	: ≤ 0.94N
EXTRACTION FORCE PER CONTACT	: ≥ 0.15N
REFERENCE SPECIFICATIONS : DIN 41612 / IEC 603-2	
SERIES	8609 3 48 8 1 14 7 5 8 V1LF
ROWS FITTED WITH CONTACTS	
Rows a-b-c	3 48
Rows a-c	4 32
NUMBER OF CONTACTS	
TYPE OF INSULATOR	
3 ROW FEMALE INSULATOR	8
METHOD OF MOUNTING	
STANDARD MOUNTING - STYLE C	1
TERMINATION	
STRAIGHT SPILL (LONG)	14
STRAIGHT SPILL (SHORT)	24
OPTIONS	
NO OPTION	7
WITH HARPOONS	H
PERFORMANCE CLASS	
4 - DIN 41612 CLASS 3	4
5 - DIN 41612 CLASS 2	5
6 - DIN 41612 CLASS 1	6
8 - AS PER MIL C 55302/JSS 50808	8
PITCH PER ROW	
5.08	8
SPECIAL CODE	
V1LF	LEAD FREE VERSION

mat'l. code				surface	tolerance	projection	product family			
-				ISO 1302	ISO 406 ISO 1101		8609			
ltr	ecn no	dr	date	tolerances unless otherwise specified			title			
A	I04-0100	MINI	09/11/2004	angles	linear	.0±.1	DIN STANDARD RECEPTACLE STRAIGHT SPILL DIN 41612 STYLE-C			
B	I05-0042	MINI	19/05/2005							
C	I06-0063	MINI	01/06/2006	0°±1°		mm	scale -			
D	ELX-I-30201	AMAL	16/05/2018	dr	MINI K VANDANATH	29/09/2004	Amphenol FCi		dwg no	sheet 1 of 1 size
				engr	RAKHEE GEORGE	29/09/2004			C-8609-2033	A3
				chr	M JACOB	16/05/2018				
				appd	BIJU K PAUL	16/05/2018				
sheet index	revision	D					type Product Customer Drawing			
	sheet	1								

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9