

LT8619 60V, 1.2A Synchronous Monolithic Buck Regulator with 6 μ A Quiescent Current

DESCRIPTION

Demonstration circuit 2137A is a monolithic step-down DC/DC switching regulator featuring the [LT[®]8619](#). The LT8619 is a high efficiency, high speed synchronous monolithic step-down switching regulator that consumes only 6 μ A of quiescent current. The demo circuit is designed for 5V, 1.2A output from 6V to 48V input with the transient input voltage up to 60V. The wide input range makes it suitable for regulating power from a wide variety of sources, including automotive, industrial systems and telecom supplies. The power switch, compensation and other necessary circuits are inside of the LT8619 to minimize external components and simplify design.

The LT8619 switching frequency can be programmed either via oscillator resistor or external clock over a 300kHz to 2.2MHz range. The default frequency of demo circuit 2137A is 2MHz. The SYNC pin on the demo board is grounded (JP1 at BURST position) by default for low ripple Burst Mode[®] operation. To synchronize to an external clock, move JP1 to SYNC and apply the external clock to the SYNC terminal. The R_T resistor (R4) should be chosen to set the LT8619 internal switching frequency equal or below the lowest synchronization input. During clock synchronization, the controller enters forced continuous mode. Pulse-skipping mode and forced continuous mode can be selected respectively by moving JP1 shunt.

Low ripple Burst Mode operation increases the efficiency at the light load while keeping the output ripple low. Figure 1 shows the efficiency of the circuit at 12V and 24V input in Burst Mode operation (input from V_{IN} terminal to bypass the EMI filter).

The demo board has an EMI filter installed. The EMI performance of the board (with EMI filter) is shown on Figure 2. The red line in Radiated EMI Performance is CISPR25 Class 5 peak limit. The figure shows that the circuit passes the test with a wide margin. To achieve EMI/EMC performance as shown in Figure 2, the input EMI filter is required and the input voltage should be applied at V_{EMI} terminal.

The LT8619 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this demo manual for demo circuit 2137A. The LT8619 is assembled in a small 16-lead MSOP and 10-lead 3mm $\times$ 3mm DFN packages with exposed pad. Proper board layout is essential for both low EMI operation and maximum thermal performance. See the data sheet sections for details.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2137A>

All registered trademarks and trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V_{IN}	Input Supply Range		3		60	V
V_{OUT}	Output Voltage		4.875	5	5.125	V
f_{SW}	Switching Frequency	$R_T = 20\text{k}\Omega$	1.9	2	2.1	MHz
I_{OUT}	Max Output Current		1.2			A
EFE	Efficiency at DC	$V_{IN} = 12\text{V}$, $I_{OUT} = 1.2\text{A}$		87.1		%

DESCRIPTION

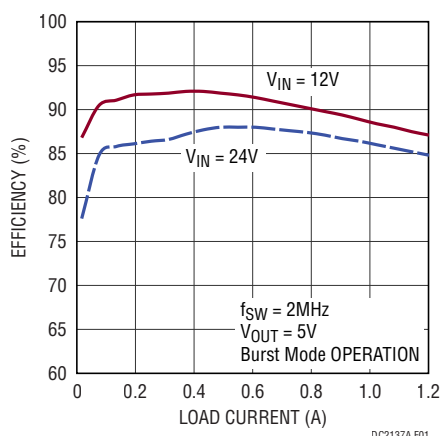


Figure 1. LT8619 DC2137A Efficiency vs Load Current

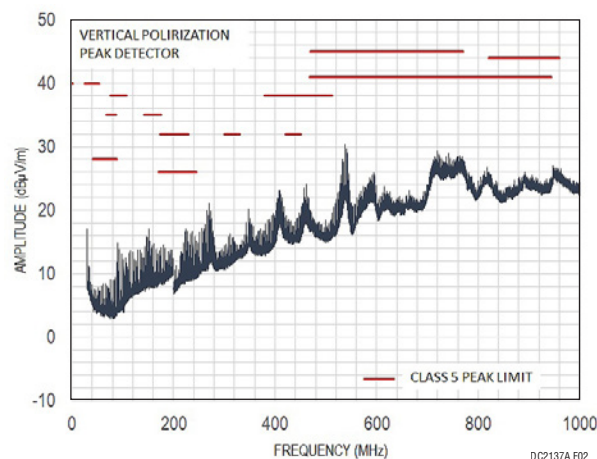


Figure 2. LT8619 DC2137A EMI Performance in CISPR25 Radiated Emission Test (12V Input from V_{EMI} Turret Pin, $I_{OUT} = 1A$)

QUICK START PROCEDURE

Demonstration circuit 2137A is easy to set up to evaluate the performance of the LT8619. Refer to Figure 3 for proper measurement equipment setup and follow the procedure below.

NOTE. When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{IN} or V_{OUT} and GND terminals. See Figure 4 for the proper scope technique.

- Place JP1 on the Burst Mode operation position.
- With power off, connect the input power supply to V_{IN1} and GND. Make sure that the input voltage does not exceed 60V.
- With power off, connect loads from V_{OUT} to GND.
- Turn on the power at the input.
- Check for the proper output voltage (5V).
NOTE: If there is no output, temporarily disconnect the load to make sure that the load is not set too high or is shorted.
- Once the proper output voltages are established, adjust the load within the operating ranges and observe the output voltage regulation, ripple voltage, efficiency and other parameters.
- An external clock can be added to the SYNC terminal when SYNC function is used (JP1 on the SYNC/MODE position). Please make sure that R4 should be chosen to set the LT8619 switching frequency equal to or below the lowest SYNC frequency. See the data sheet Synchronization section. JP1 can also set LT8619 in pulse-skipping mode (JP1 on the PULSE-SKIPPING position) or forced continuous mode (JP1 on the FORCED CONTINUOUS position).

Quick Start Procedure

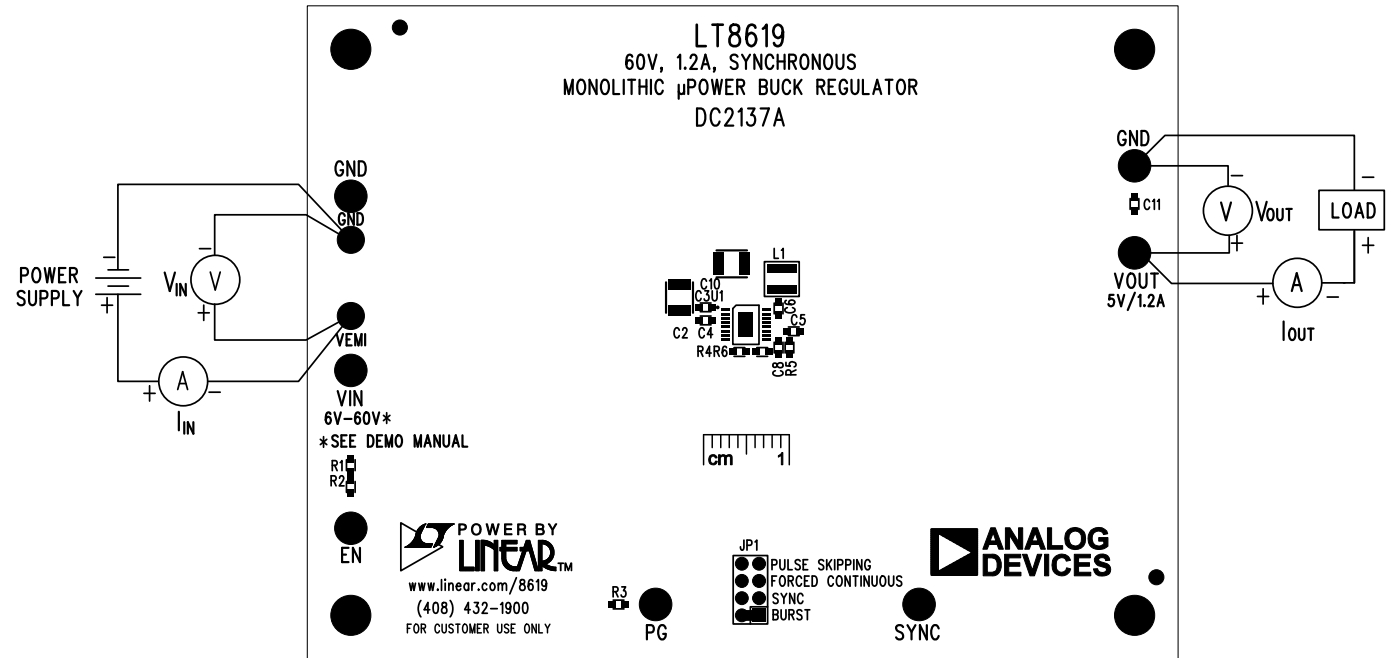


Figure 3. Proper Measurement Equipment Setup

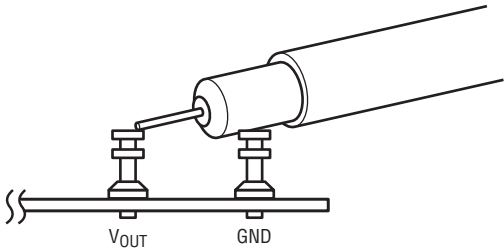


Figure 4. Measuring Input or Output Ripple

DEMO MANUAL DC2137A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Demo Board Circuit Components				
1	1	C2	CAP., X7R, 2.2 μ F, 100V, 10% 1210	TDK, C3225X7R2A225K230AB
2	2	C5, C11	CAP., X7R, 1 μ F, 25V, 10% 0603	TDK, C1608X7R1E105K080AB
3	1	C6	CAP., X7R, 0.1 μ F, 25V, 10%, 0603	TDK, C1608X7R1E104K080AA
4	1	C8	CAP., C0G, 4.7pF, 50V, $\pm$ 0.25pF, 0603	MURATA, GRM1885C1H4R7CA01D
5	1	C10	CAP., X7R, 22 μ F, 16V, 10% 1210	MURATA, GRM32ER71C226KE18L
6	1	L1	IND., 4.7 μ H, XFL4030	COILCRAFT, XFL4030-472ME
7	2	R1, R5	RES., CHIP, 1M, 1/10W, 1% 0603	VISHAY, CRCW06031M00FKEA
8	1	R3	RES., CHIP, 100k, 1/10W, 1% 0603	VISHAY, CRCW0603100KFKEA
9	1	R4	RES., CHIP, 20k, 1/10W, 1% 0603	VISHAY, CRCW060320K0FKEA
10	1	R6	RES., CHIP, 191k, 1/10W, 1% 0603	VISHAY, CRCW0603191KFKEA
11	1	R7	RES., CHIP, 0 Ω , 1/10W, 0603	VISHAY, CRCW06030000Z0EA
12	1	U1	I.C., BUCK REGULATOR, MSOP-16E	ANALOG DEVICES, LT8619EMSE#PBF
Additional Demo Board Circuit Components				
1	2	C12, 13	CAP., X7R, 2.2 μ F, 100V, 10% 1210	TDK, C3225X7R2A225K230AB
2	2	C3, C4	CAP., X7R, 0.1 μ F, 100V, 10% 0603	MURATA, GRM188R72A104KA35D
3	1	C1	CAP., ALUM. ELECTRO., 10 μ F, 63V	PANASONIC, EEH2C1J100P
4	1	FB	BEAD, 330 Ω , MPZ2012	TDK, MPZ2012S331AT000
5	1	L2	IND., 2.2 μ H, XEL4020	COILCRAFT, XEL4020-222ME
6	0	C7	CAP., 0603 (OPT)	
7	0	R2	RES., CHIP, 0603 (OPT)	
Hardware/Components (for Demo Board Only)				
1	2	E1, E2	TESTPOINT, TURRET, 0.061" PBF	MILL-MAX, 2308-2-00-80-00-00-07-0
2	7	E3-E9	TESTPOINT, TURRET, 0.094" PBF	MILL-MAX, 2501-2-00-80-00-00-07-0
3	1	JP1	0.079 $\times$ 4 DOUBLE ROW HEADER	WURTH ELEKTRONIK, 62000821121
4	1	XJP1	SHUNT, 0.079" CENTER	WURTH ELEKTRONIK, 60800213421



NOTES: UNLESS OTHERWISE SPECIFIED

1. ALL RESISTORS ARE 0603.
ALL CAPACITORS ARE 0603.

CUSTOMER NOTICE

LINEAR
TECHNOLOGY

TITLE: SCHEMATIC

MONOLITHIC POWER BUCK REGULATOR

o.	IT8619FMSF	REV.
----	------------	------

N/A	DEMO CIRCUIT 213/A	SHEET 1 OF 1
DATE:	Thursday, September 28, 2017	

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

**ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. **CONFIDENTIALITY.** This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. **ADDITIONAL RESTRICTIONS.** Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. **TERMINATION.** ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. **LIMITATION OF LIABILITY.** THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). **EXPORT.** Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. **GOVERNING LAW.** This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9