

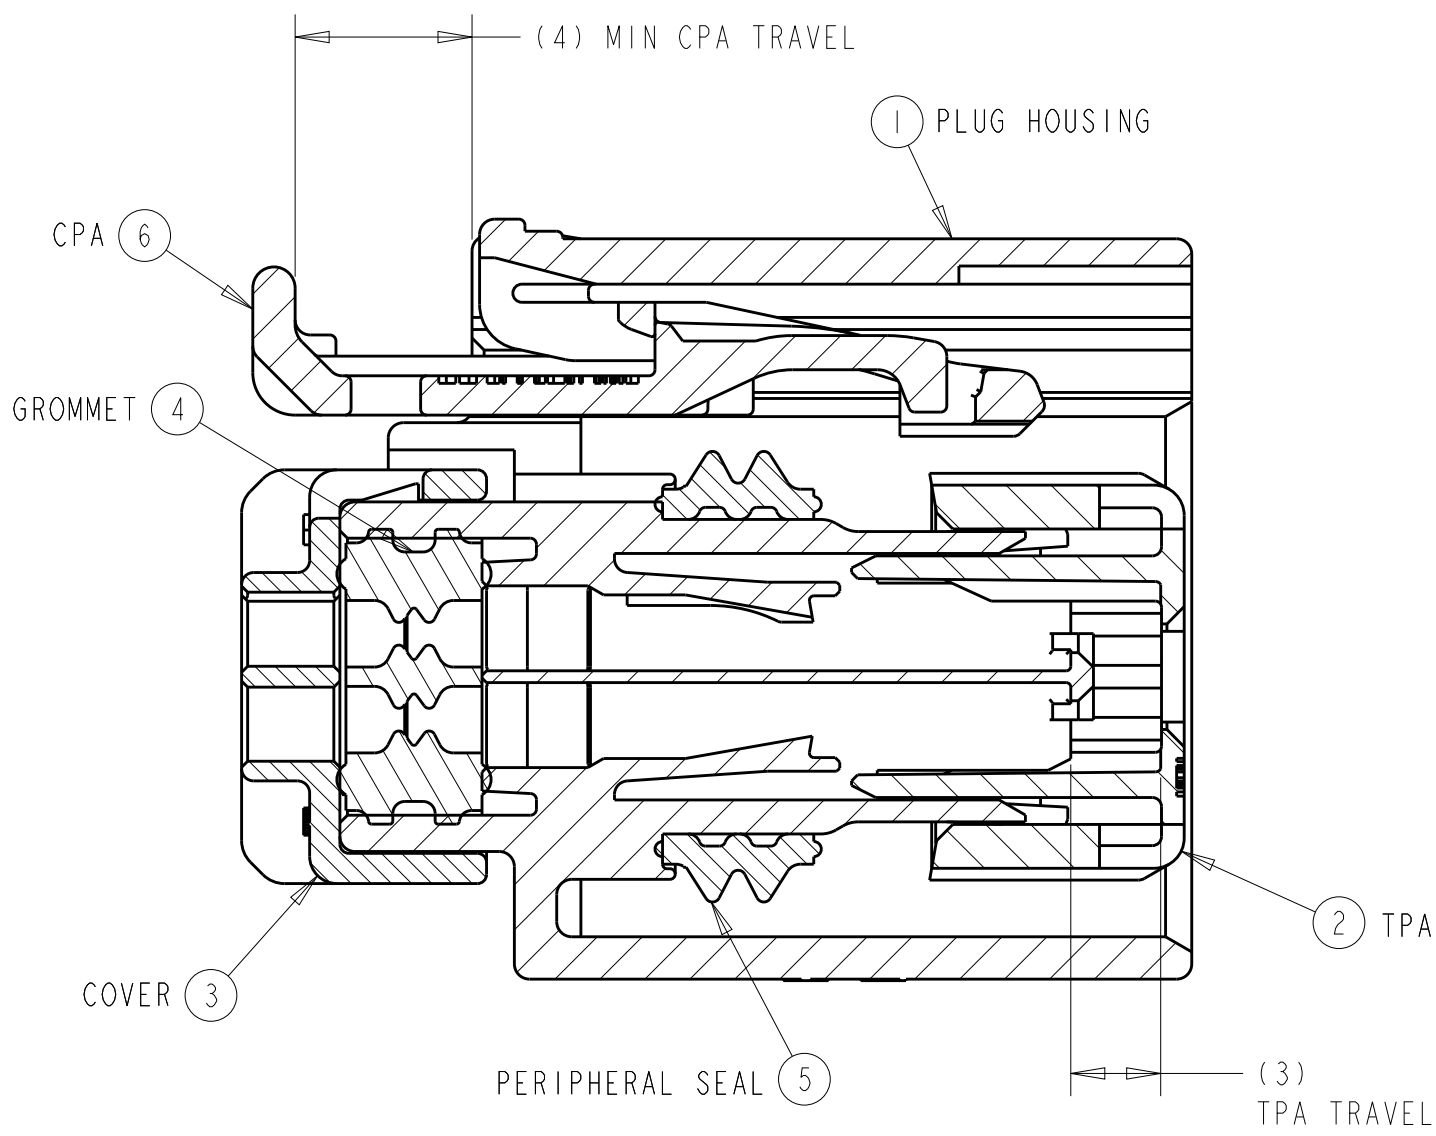


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A7	REVISED PER ECO-15-018007	11JAN2016	DLD	DCM


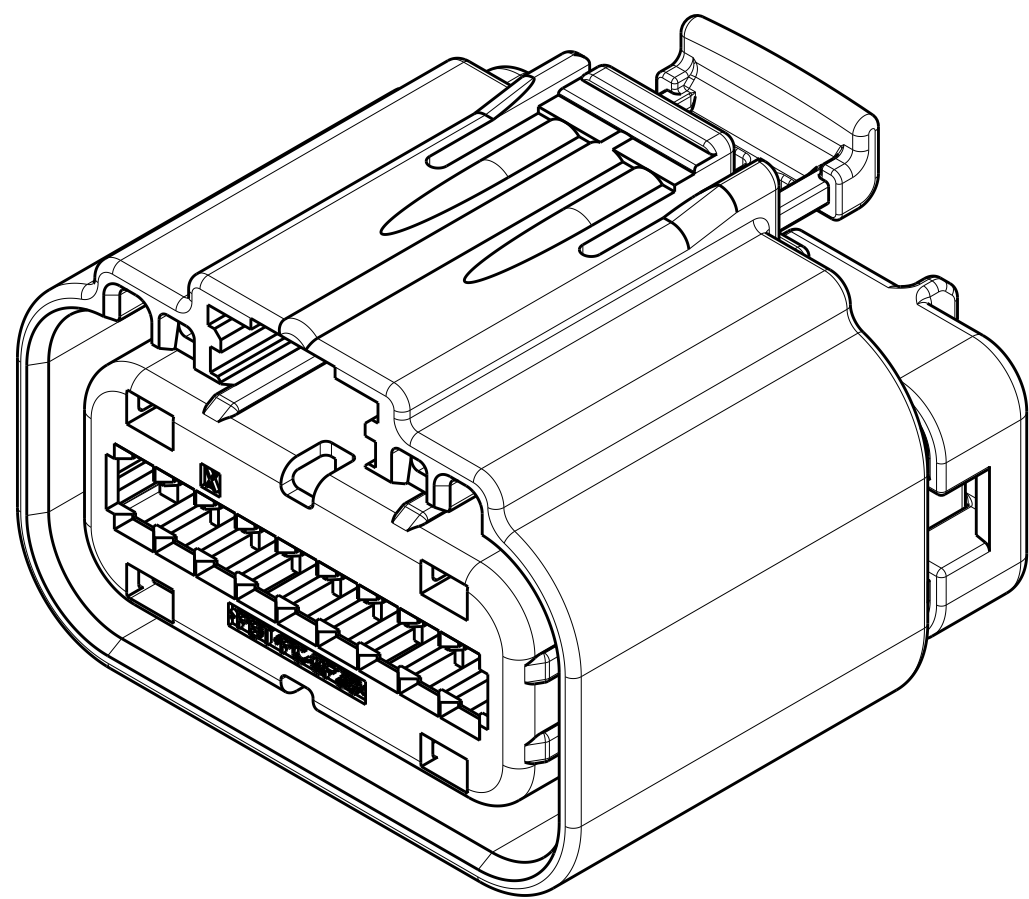


SECTION A-A
SHOWN WITH TPA
IN PRE-LOADED POSITION
(DELIVERY CONDITION)

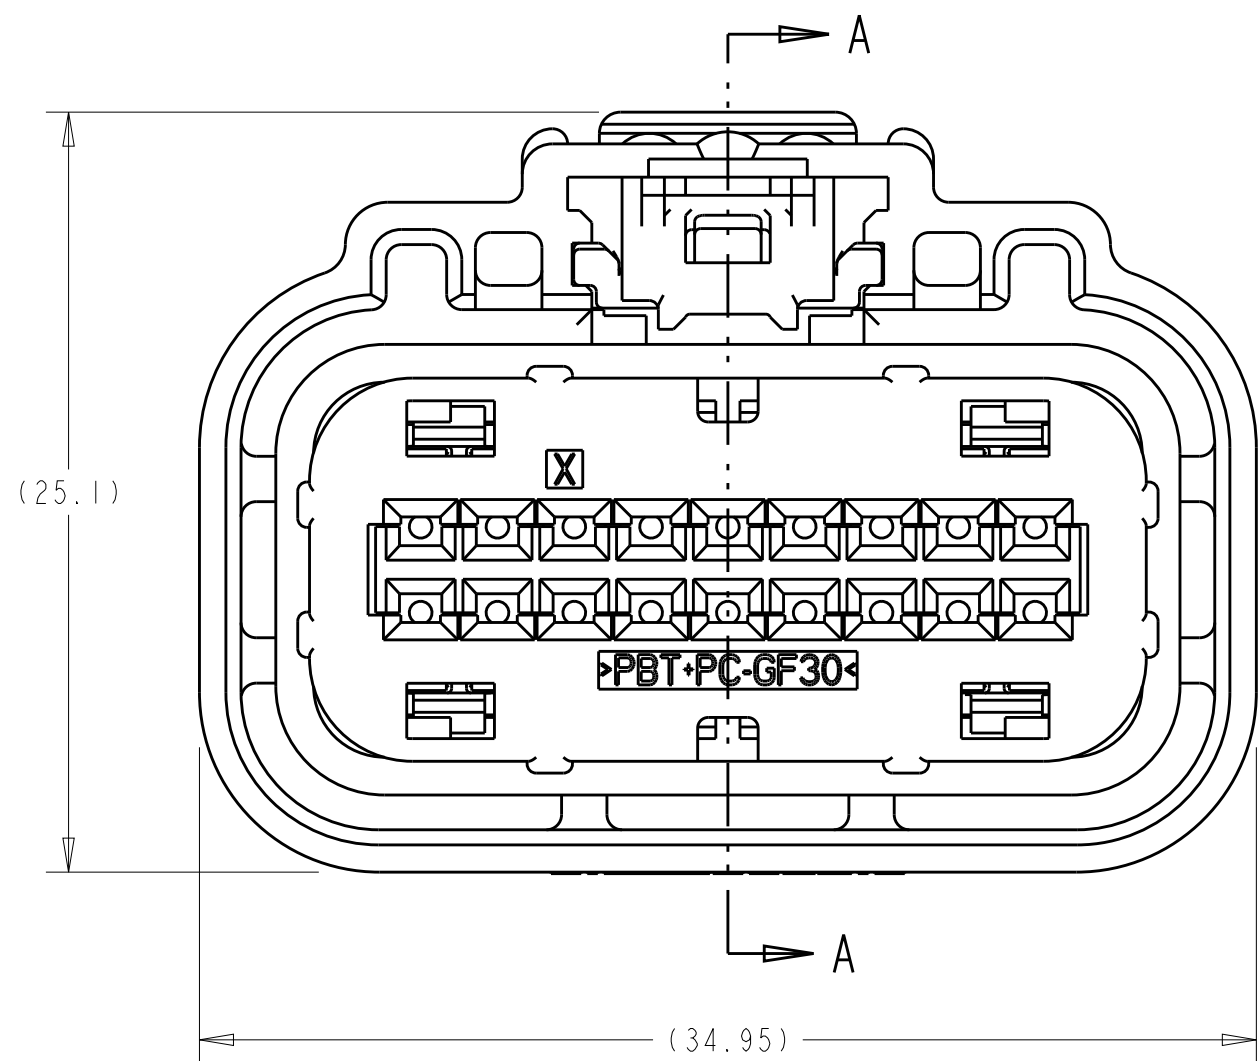


SCALE 3:1

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN AND SILVER APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm²).
3. TPA IS SHIPPED IN PRE-LOADED POSITION. SOME TPA'S MAY BECOME FULLY SEATED DURING SHIPPING. USE TE INSTRUCTION SHEET 408-10128 TO REPOSITION TPA TO IT'S PRE-LOADED POSITION.
4. TE ASSEMBLY PART NUMBER (X-XXXXXXX-X) AND TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR) ARE PRINTED IN THIS LOCATION.
5. APPLICABLE HEADER INTERFACE DRAWING 1488536 IS AVAILABLE UPON REQUEST. A COPY OF THIS DRAWING CAN BE OBTAINED FROM THE TE PRODUCT MANAGER, VIA YOUR TE SALES REPRESENTATIVE OR CUSTOMER SERVICE.
6. ASSEMBLIES ARE BULK PACKAGED.
7. OPTIONAL CPA IS SHIPPED IN IT'S PRE-LOADED POSITION.
8. PART NOT RELEASED TO PRODUCTION.
9. COMPANY LOGO AND MOLD CAVITY ID LOCATED ON THIS SURFACE.

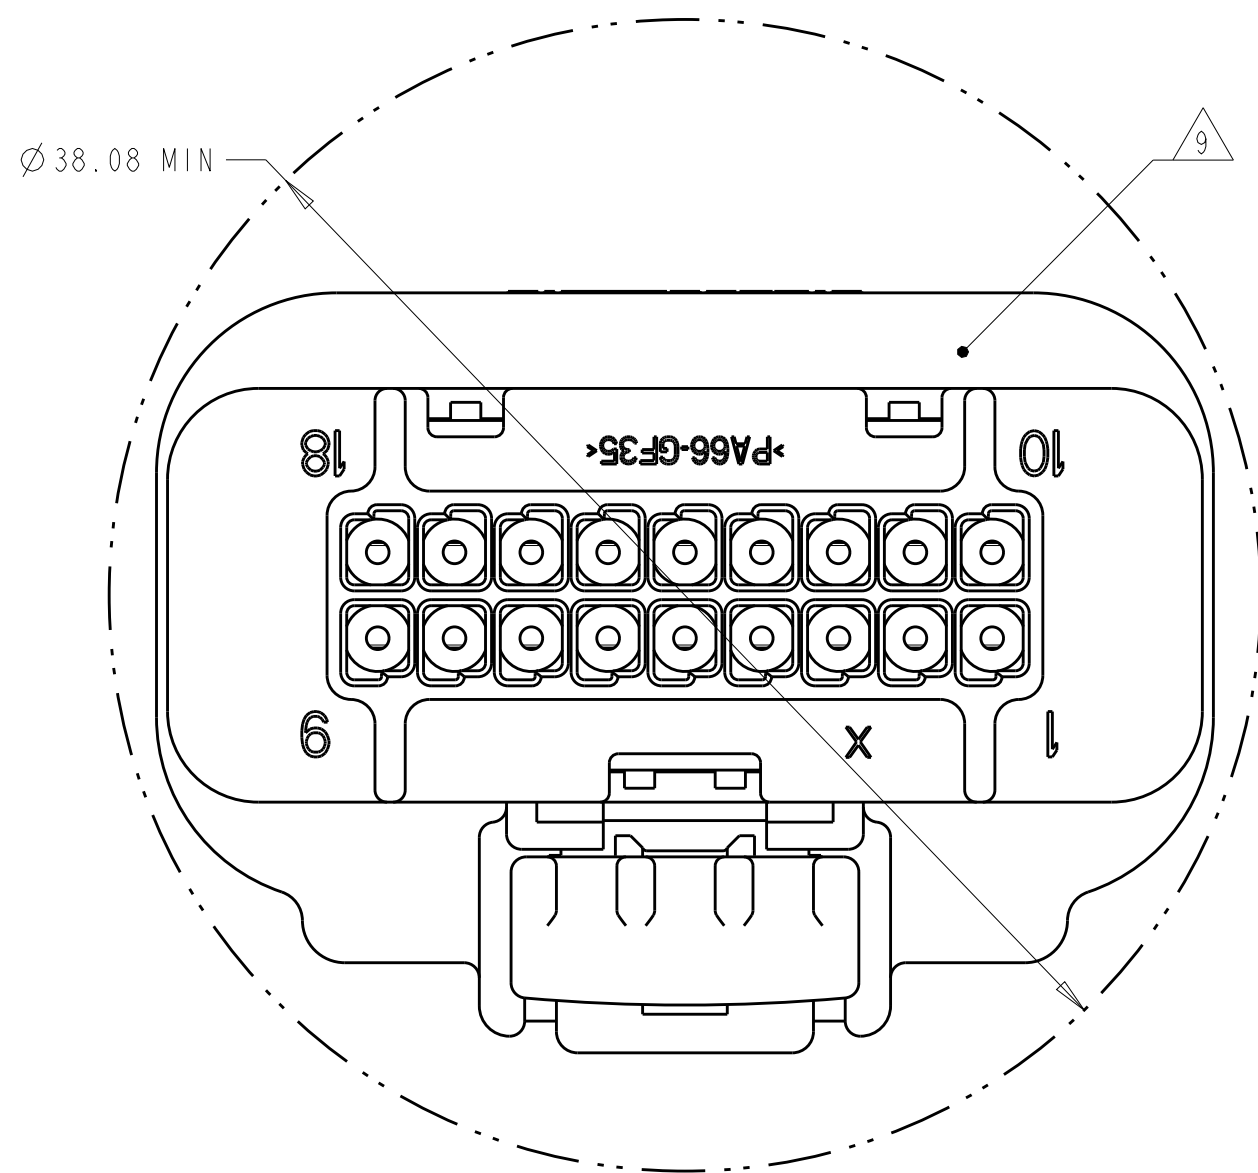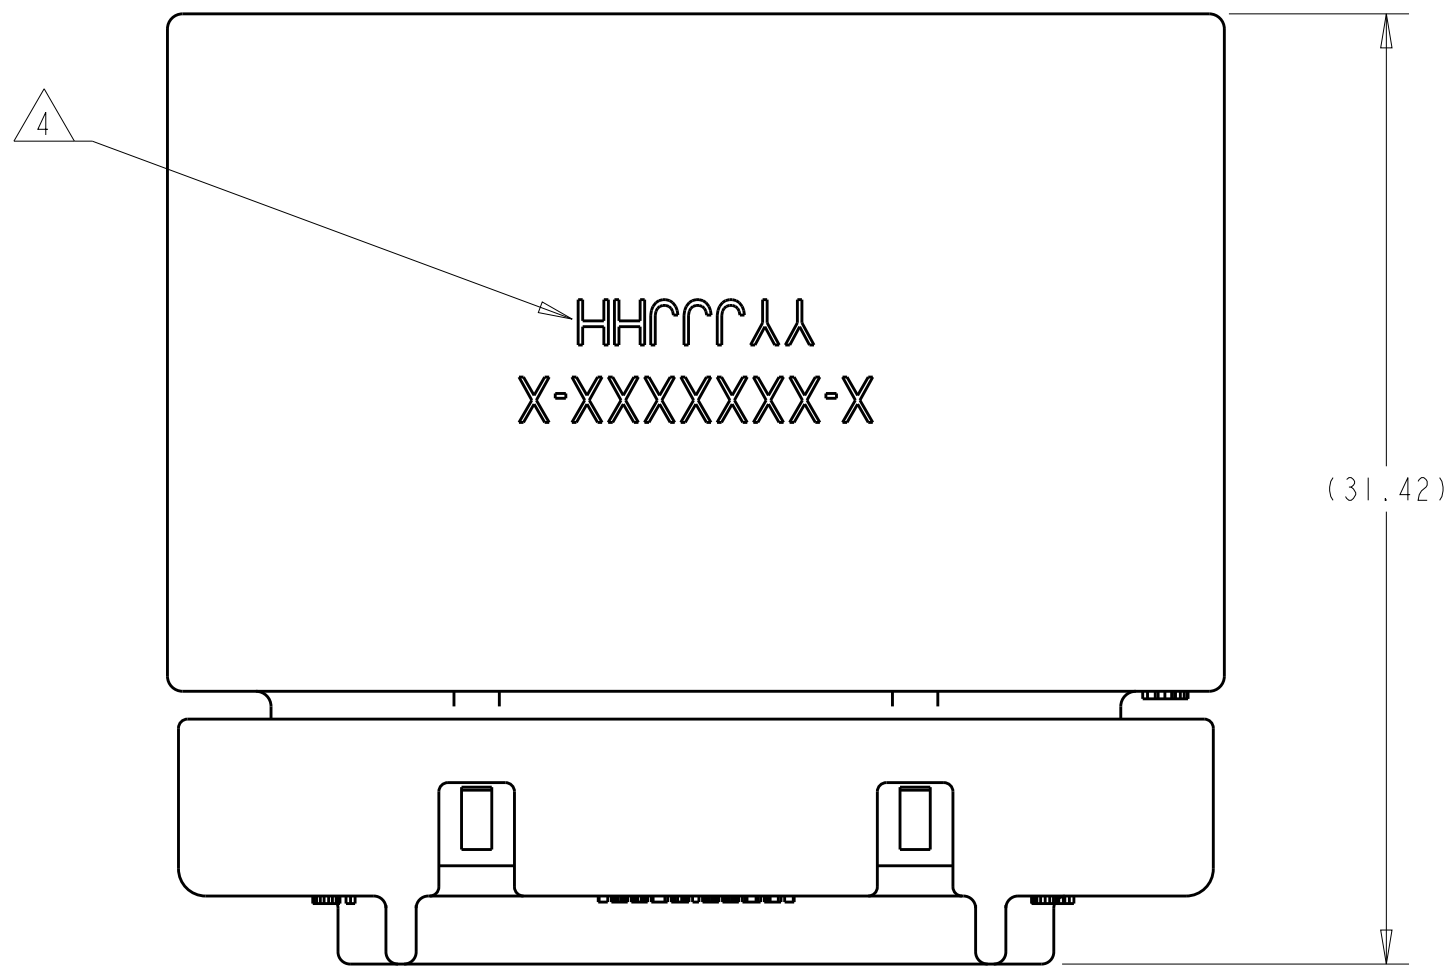


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

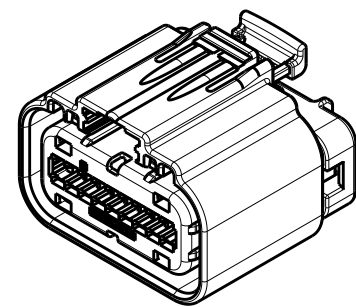


SCALE 1:1


KEYING OPTION "A" SHOWN
SEE NOTE 5 FOR APPLICABLE
HEADER INTERFACE INFORMATION

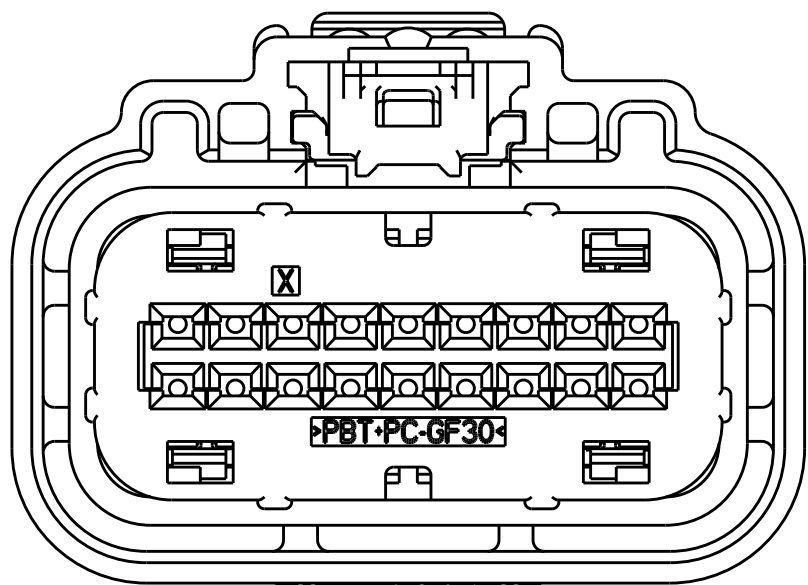


KEYING OPTION "A"
HOUSING COLOR: BLACK
SCALE 3:1

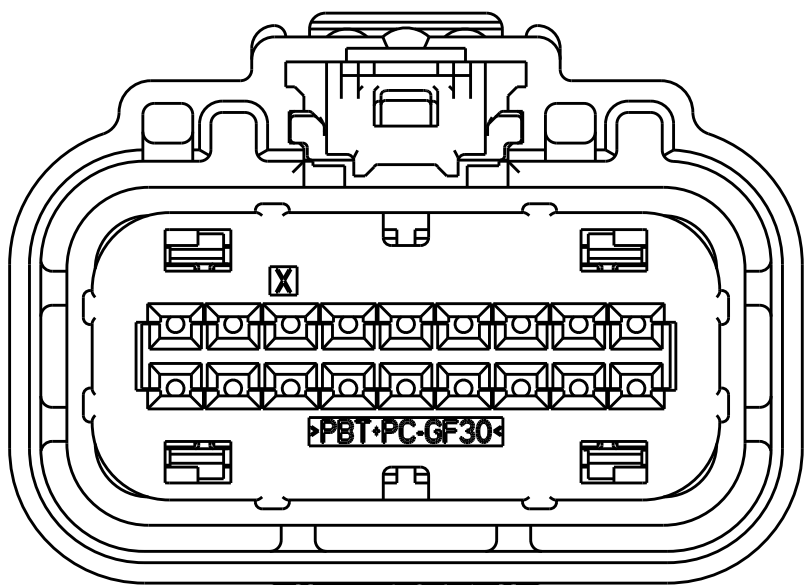

KEYING OPTION "B"
HOUSING COLOR: GRAY
SCALE 3:1

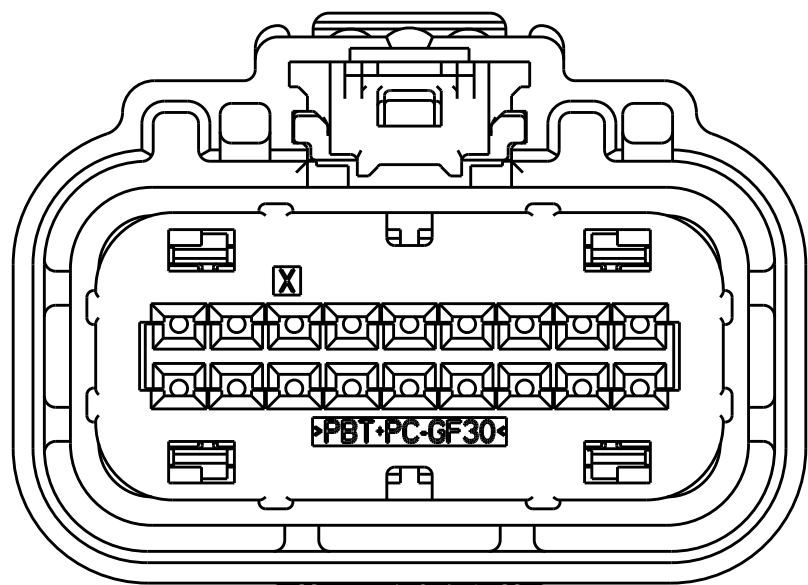

KEYING OPTION "C"
HOUSING COLOR: BROWN
SCALE 3:1

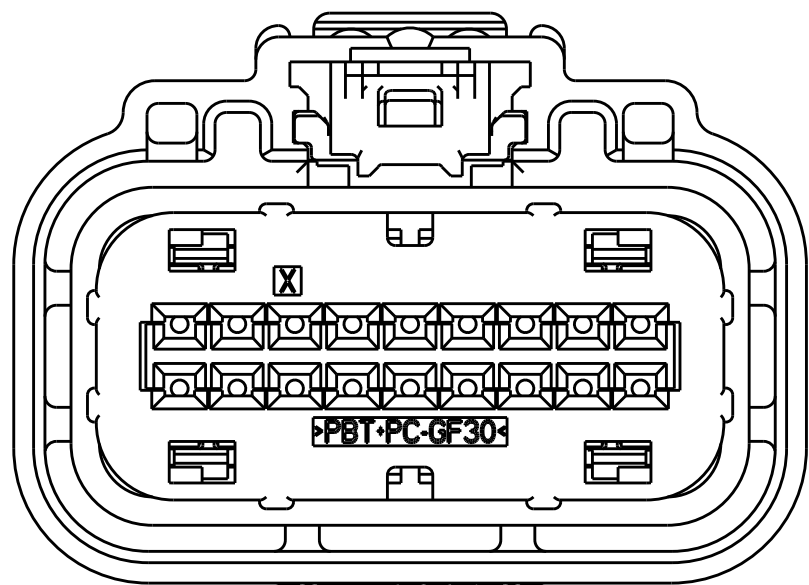

KEYING OPTION "D"
HOUSING COLOR: GREEN
SCALE 3:1

SEE SHEET 2 FOR BILL OF MATERIALS
AND PINOUT CHART

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. DRUMMOND 25FEB2013	TE Connectivity	
DIMENSIONS:		CHK C. MARTIN 25FEB2013		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C. MARTIN 25FEB2013	NAME	
	0 PLC ±.3	PRODUCT SPEC	2 X 9 SEALED, FEMALE PLUG ASSEMBLY	
	1 PLC ±0.10	108-2282		
	2 PLC ±.10	APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
	3 PLC ±.10	114-13150		
MATERIAL	FINISH	WEIGHT	A1 00779 ©=2203663	
SEE TABLE	-	-		
CUSTOMER DRAWING		SCALE 3:1	SHEET 1 OF 2	REV A7

8	7	6	5	4	3	2	1
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		2001			
COPYRIGHT 2001		BY -		ALL RIGHTS RESERVED.			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9