


SPECIFICATION CONTROL DRAWING

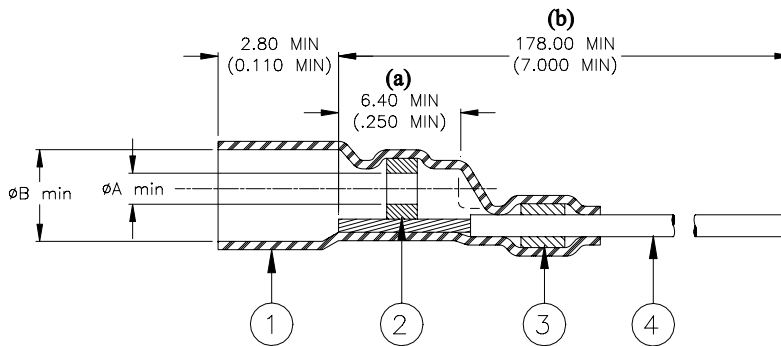

Product Revision		(4) Wire Designation	ϕA min	ϕB min	Usable Wire or Component Diameters	
Product Name					ϕC	ϕD
D-112-1222-9	N/C	MIL-W-22759/32-22-9	0.71 (0.028)	2.33 (0.092)	0.25 to 0.60 (0.010 to 0.025)	0.75 to 2.30 (0.030 to 0.090)
D-112-1224-9	N/C	MIL-W-22759/32-24-9				
D-112-1622	N/C	Solder Plated Bus Wire				
D-112-1830-9	N/C	MIL-W-81822/13-30-9	1.11 (0.044)	3.00 (0.118)	0.50 to 1.07 (0.020 to 0.042)	0.75 to 3.00 (0.030 to 0.118)
D-112-2222-9	N/C	MIL-W-22759/32-22-9				
D-112-2622	N/C	Solder Plated Bus Wire				
D-112-2830-9	N/C	MIL-W-81822/13-30-9	1.24 (0.050)	3.94 (0.155)	0.80 to 1.14 (0.032 to 0.045)	1.40 to 3.90 (0.055 to 0.153)
D-112-3222-9	N/C	MIL-W-22759/32-22-9				
D-112-3622	N/C	Solder Plated Bus Wire				
D-112-3830-9	N/C	MIL-W-81822/13-30-9				

Dimensional Notes:


- (a) Dimension is to top shoulder (wire stop) of sleeve. Position of lead relative to solder preform and shoulder may vary from diagram.
(b) Lead length for sleeves with bus wire is 27.94 min. (1.10 min.) overall with 12.7 min. (0.50 min) extension from end of sleeve.

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:
SOLDER: TYPE Sn63 per ANSI/J-STD-006.
FLUX: TYPE ROL1 per ANSI/J-STD-004.
- MELTABLE INSERT: Polyolefin-based thermoplastic. Color: blue.
- PRE-INSTALLED LEAD: See table.

APPLICATION

- The parts covered by this document are used to attach the pre-installed lead to another electrical conductor such as component leads, coaxial cable primary, insulated wire or connector terminals. Insulated leads and coax dielectric must be rated for at least 125°C.
- Spliced assemblies will meet the performance requirements of Tyco Electronics/Raychem specification RT-1404 when installed on solderable components using a Tyco Electronics/Raychem approved convection or infrared heater and reflector. For best results, prepare the wire(s) as shown:

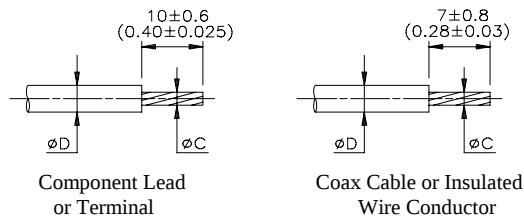

tyco Electronics		Raychem Products 305 Constitution Drive, Menlo Park, CA. 94025, USA		TITLE: SOLDERSLEEVE SPLICES WITH PRE-INSTALLED LEADS, SERIES D-112				
Unless otherwise specified dimensions are in millimeters. Inches dimensions are shown in brackets.					DOCUMENT NO.: D-112-1XXX / -3XXX Series			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			PROD. REV.: SEE TABLE	DOC. ISSUE: 3	DATE: 18-Feb-03	
PREPARED BY: mforonda		DCR NUMBER: D030064		REPLACES: D020199		SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9