

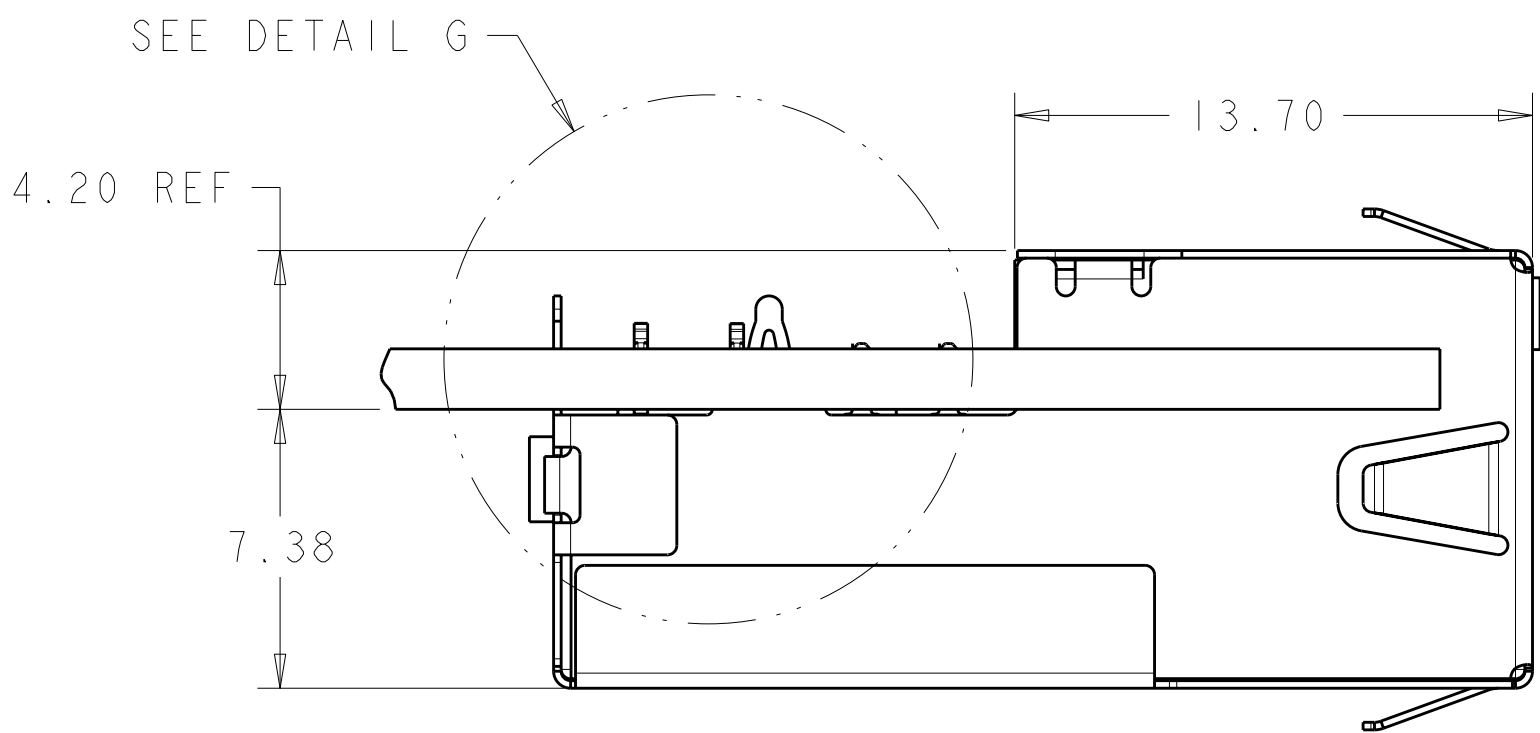
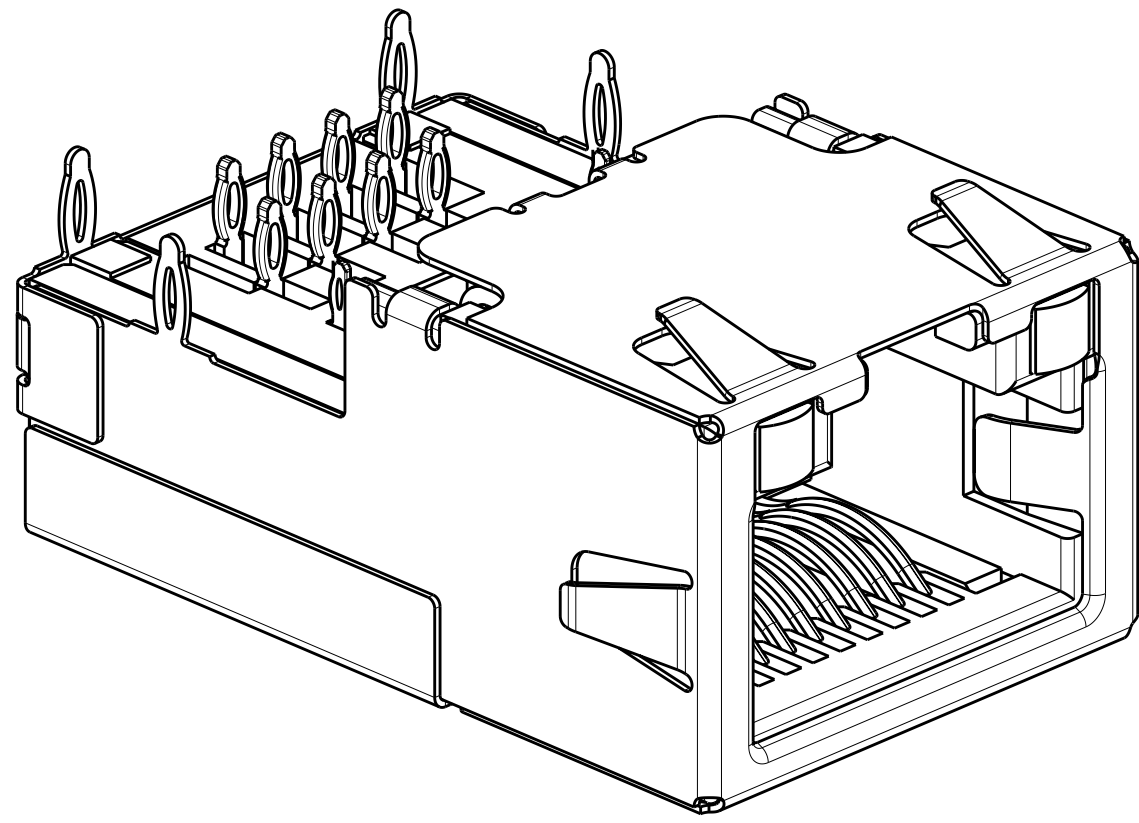
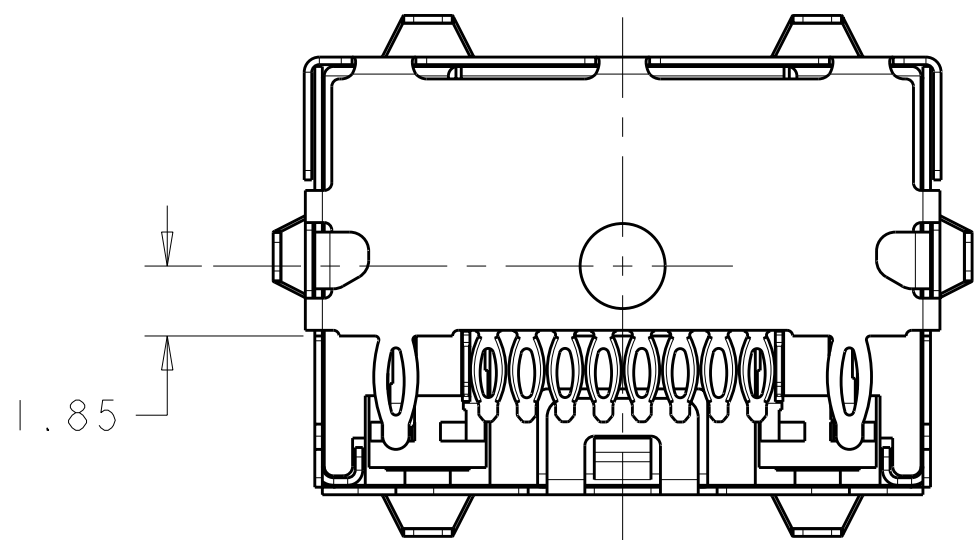
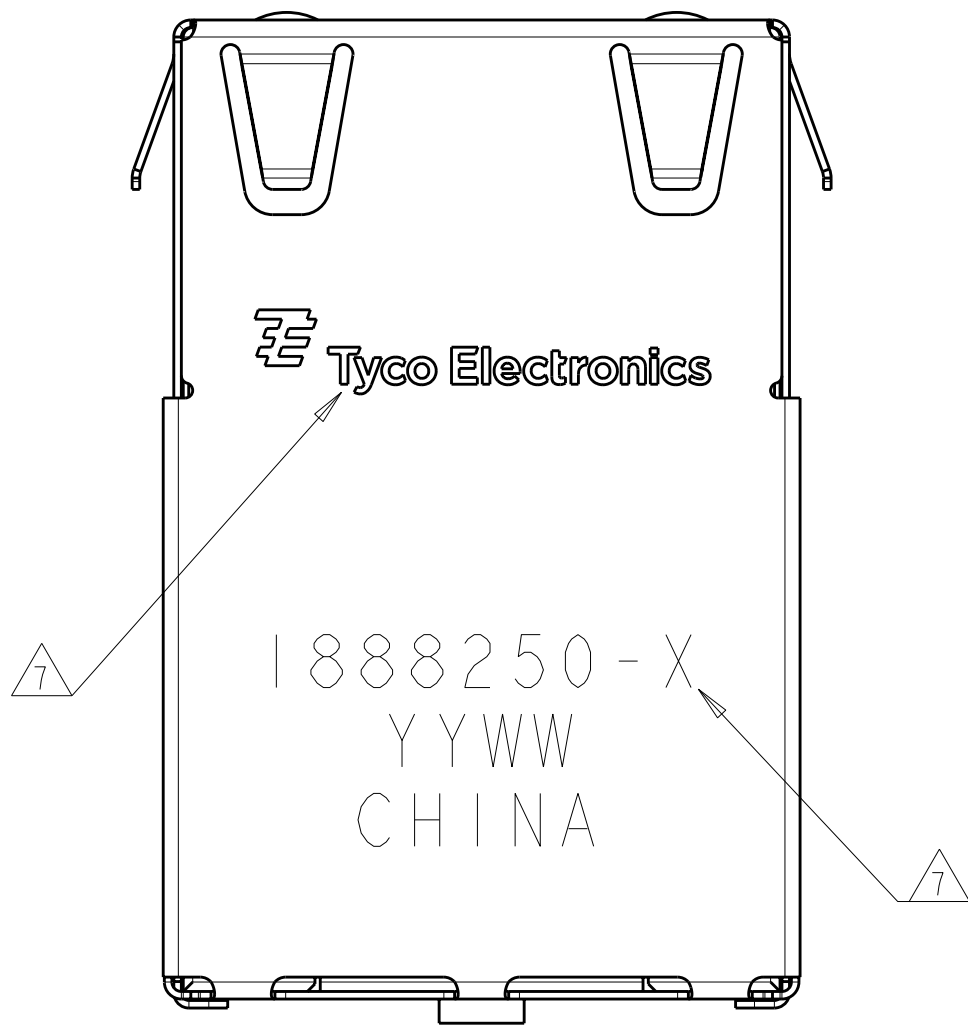


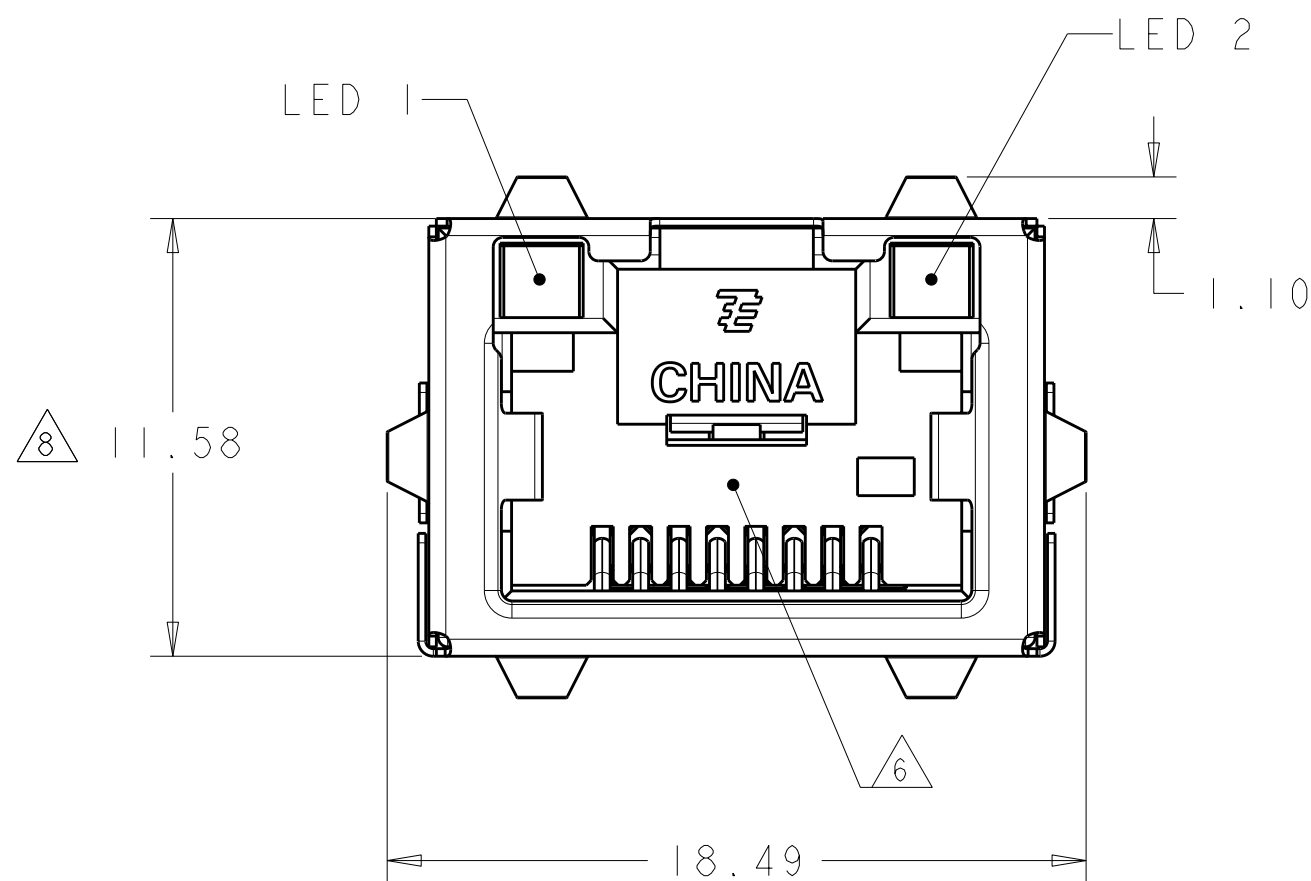


VIEW SHOWN ASSEMBLED
TO PCB ONLY

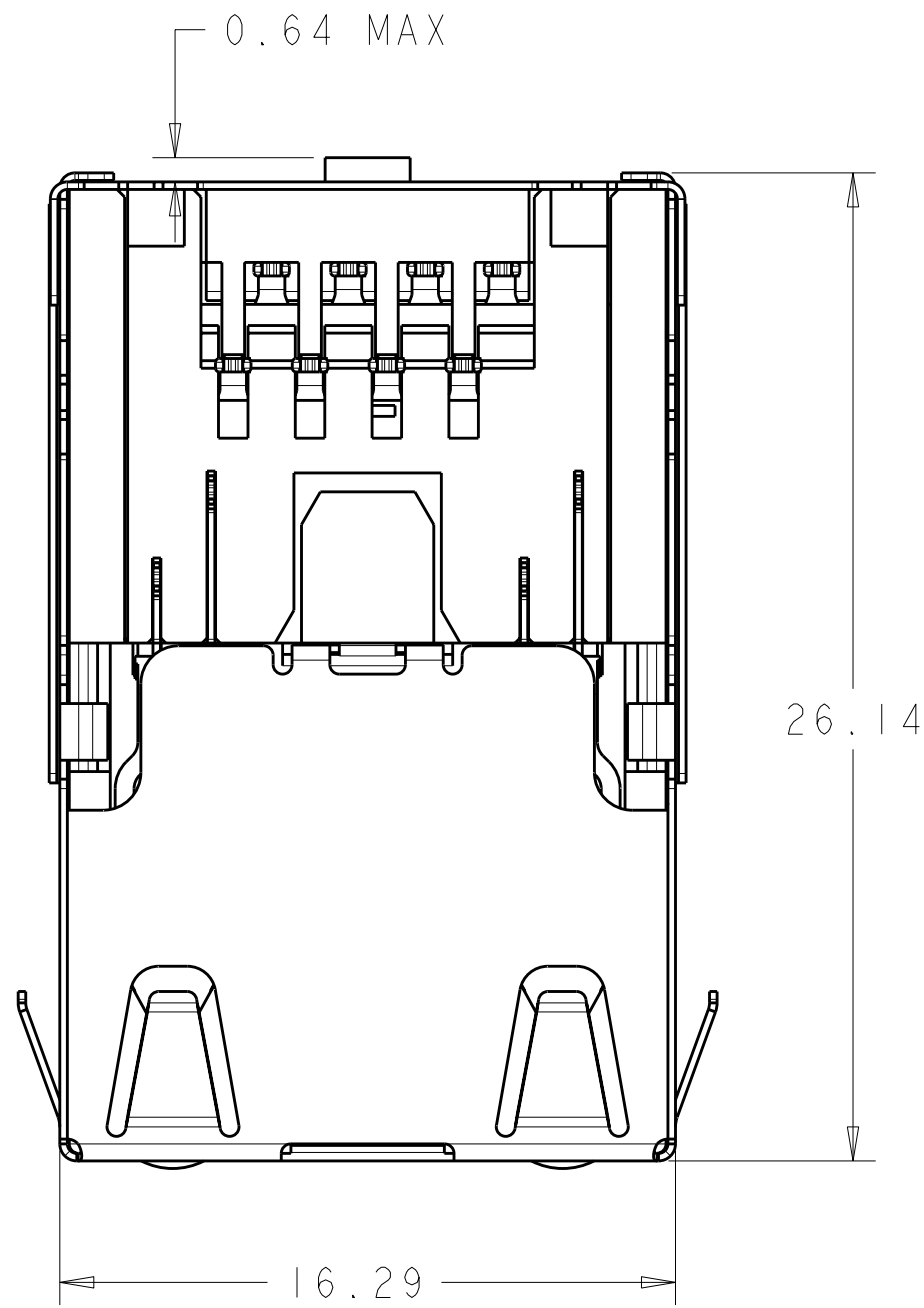

- MATERIALS:
HOUSING: BLACK THERMOPLASTIC, 94V-0.
SHIELD: COPPER ALLOY WITH 0.76µm MIN NICKEL PLATE
CONTACTS: PHOSPHOR BRONZE WITH 1.27µm MIN GOLD
AT MATING INTERFACE OVER 1.27µm MIN NICKEL
UNDERPLATE.
 - PERFORMANCE:
INSERTION LOSS: 0.4dB @ 100 MHz.
RETURN LOSS: 12.0dB @ 100 MHz.
CROSSTALK ATTENUATION: -43dB MINIMUM @ 100 MHz
CURRENT: 0.6 AMPERE MAXIMUM PER SINGAL CONTACT.
 - LED's COMPLIANT WITH IEC60825-1 SAFETY OF LASER
PRODUCTS WHEN OPERATED AT CURRENT OF 20mA.
 - ALL DIMENSIONS NOMINAL.
 - RECOMMENDED MOTHERBOARD PCB THICKNESS: 1.60±0.16.
- RJ45 PORT CONFORMS TO FCC RULES AND REGULATIONS
PART 68 SUB-PART F.
- TE LOGO, PART NUMBER, DATE CODE AND
COUNTRY OF ORIGIN TO BE MARKED IN APPROXIMATE LOCATION
SHOWN.
- THIS DIMENSION MEETS THE ADVANCED MEZZANINE CARD
(AMC) SPECIFICATION.
- PIN 9,10,11,12 ARE LED LEAD PINS, For 1888250-3, NO
LED INTEGRATED, HOLES ON PCB FOR THESE PINS ARE ONLY OPTIONAL.

LOC	DIST	REVISIONS					
AA	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B5	ECR-11-009822	11MAY2011	JJ	MOW
			C	ECR-12-002445	09FEB2012	JJ	AC






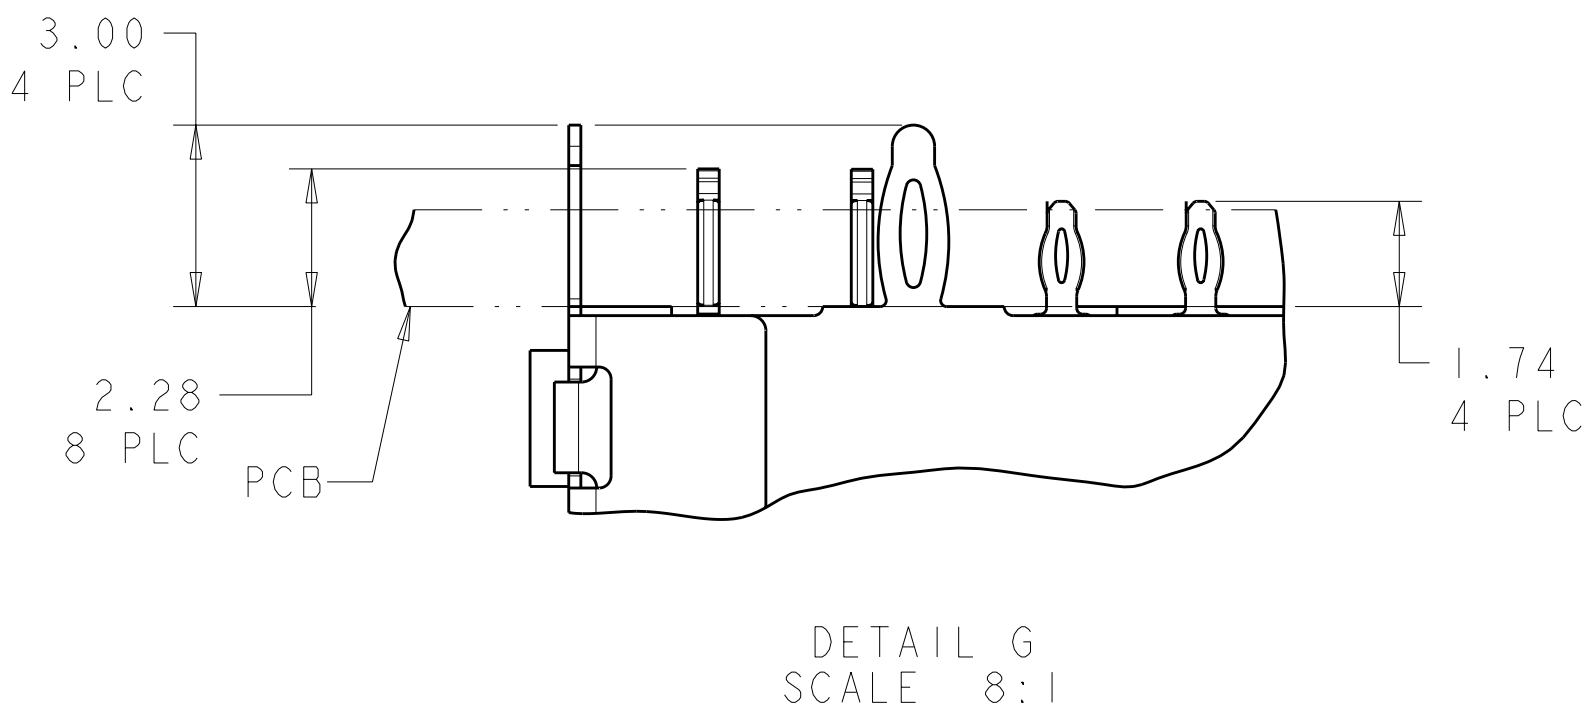


DETAIL G
SCALE 8:1

YELLOW	GREEN	1888250-5
GREEN	GREEN	1888250-4
-	-	1888250-3
GRN/YEL	GRN/YEL	1888250-2
GREEN	YELLOW	1888250-1
LED #1	LED #2	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN MS/L.A.MAYER	15FEB2008	 TE Connectivity						
			CHK J.WESTMAN	15FEB2008							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:			APVD S.FLICKINGER	15FEB2008	NAME	CONNECTOR ASSEMBLY, LOW PROFILE. PRESS FIT, MODULAR JACK, 1X1, RJ45			
mm					PRODUCT SPEC						
		0	PLC	±.	108-2274						
		1	PLC	±.	APPLICATION SPEC						
		2	PLC	±0.13	114-13179						
		3	PLC	±.	-						
		4	PLC	±.							
ANGLES		±°					SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL		FINISH			WEIGHT		A100779		C1888250	-	
SEE NOTE 1		SEE NOTE 1			CUSTOMER DRAWING		SCALE		1:1	SHEET 1 OF 3	REV C

LOC		DIST		REVISONS			
AA	00	P	LYR	DESCRIPTION	DATE	OWN	APVD
		-	-	SEE SHEET 1	-	-	-

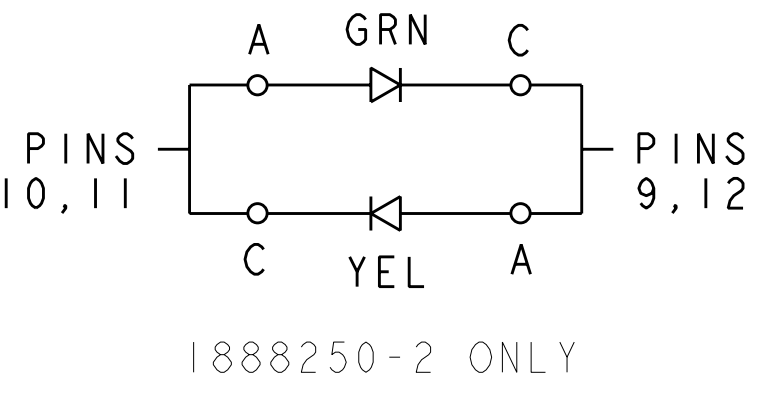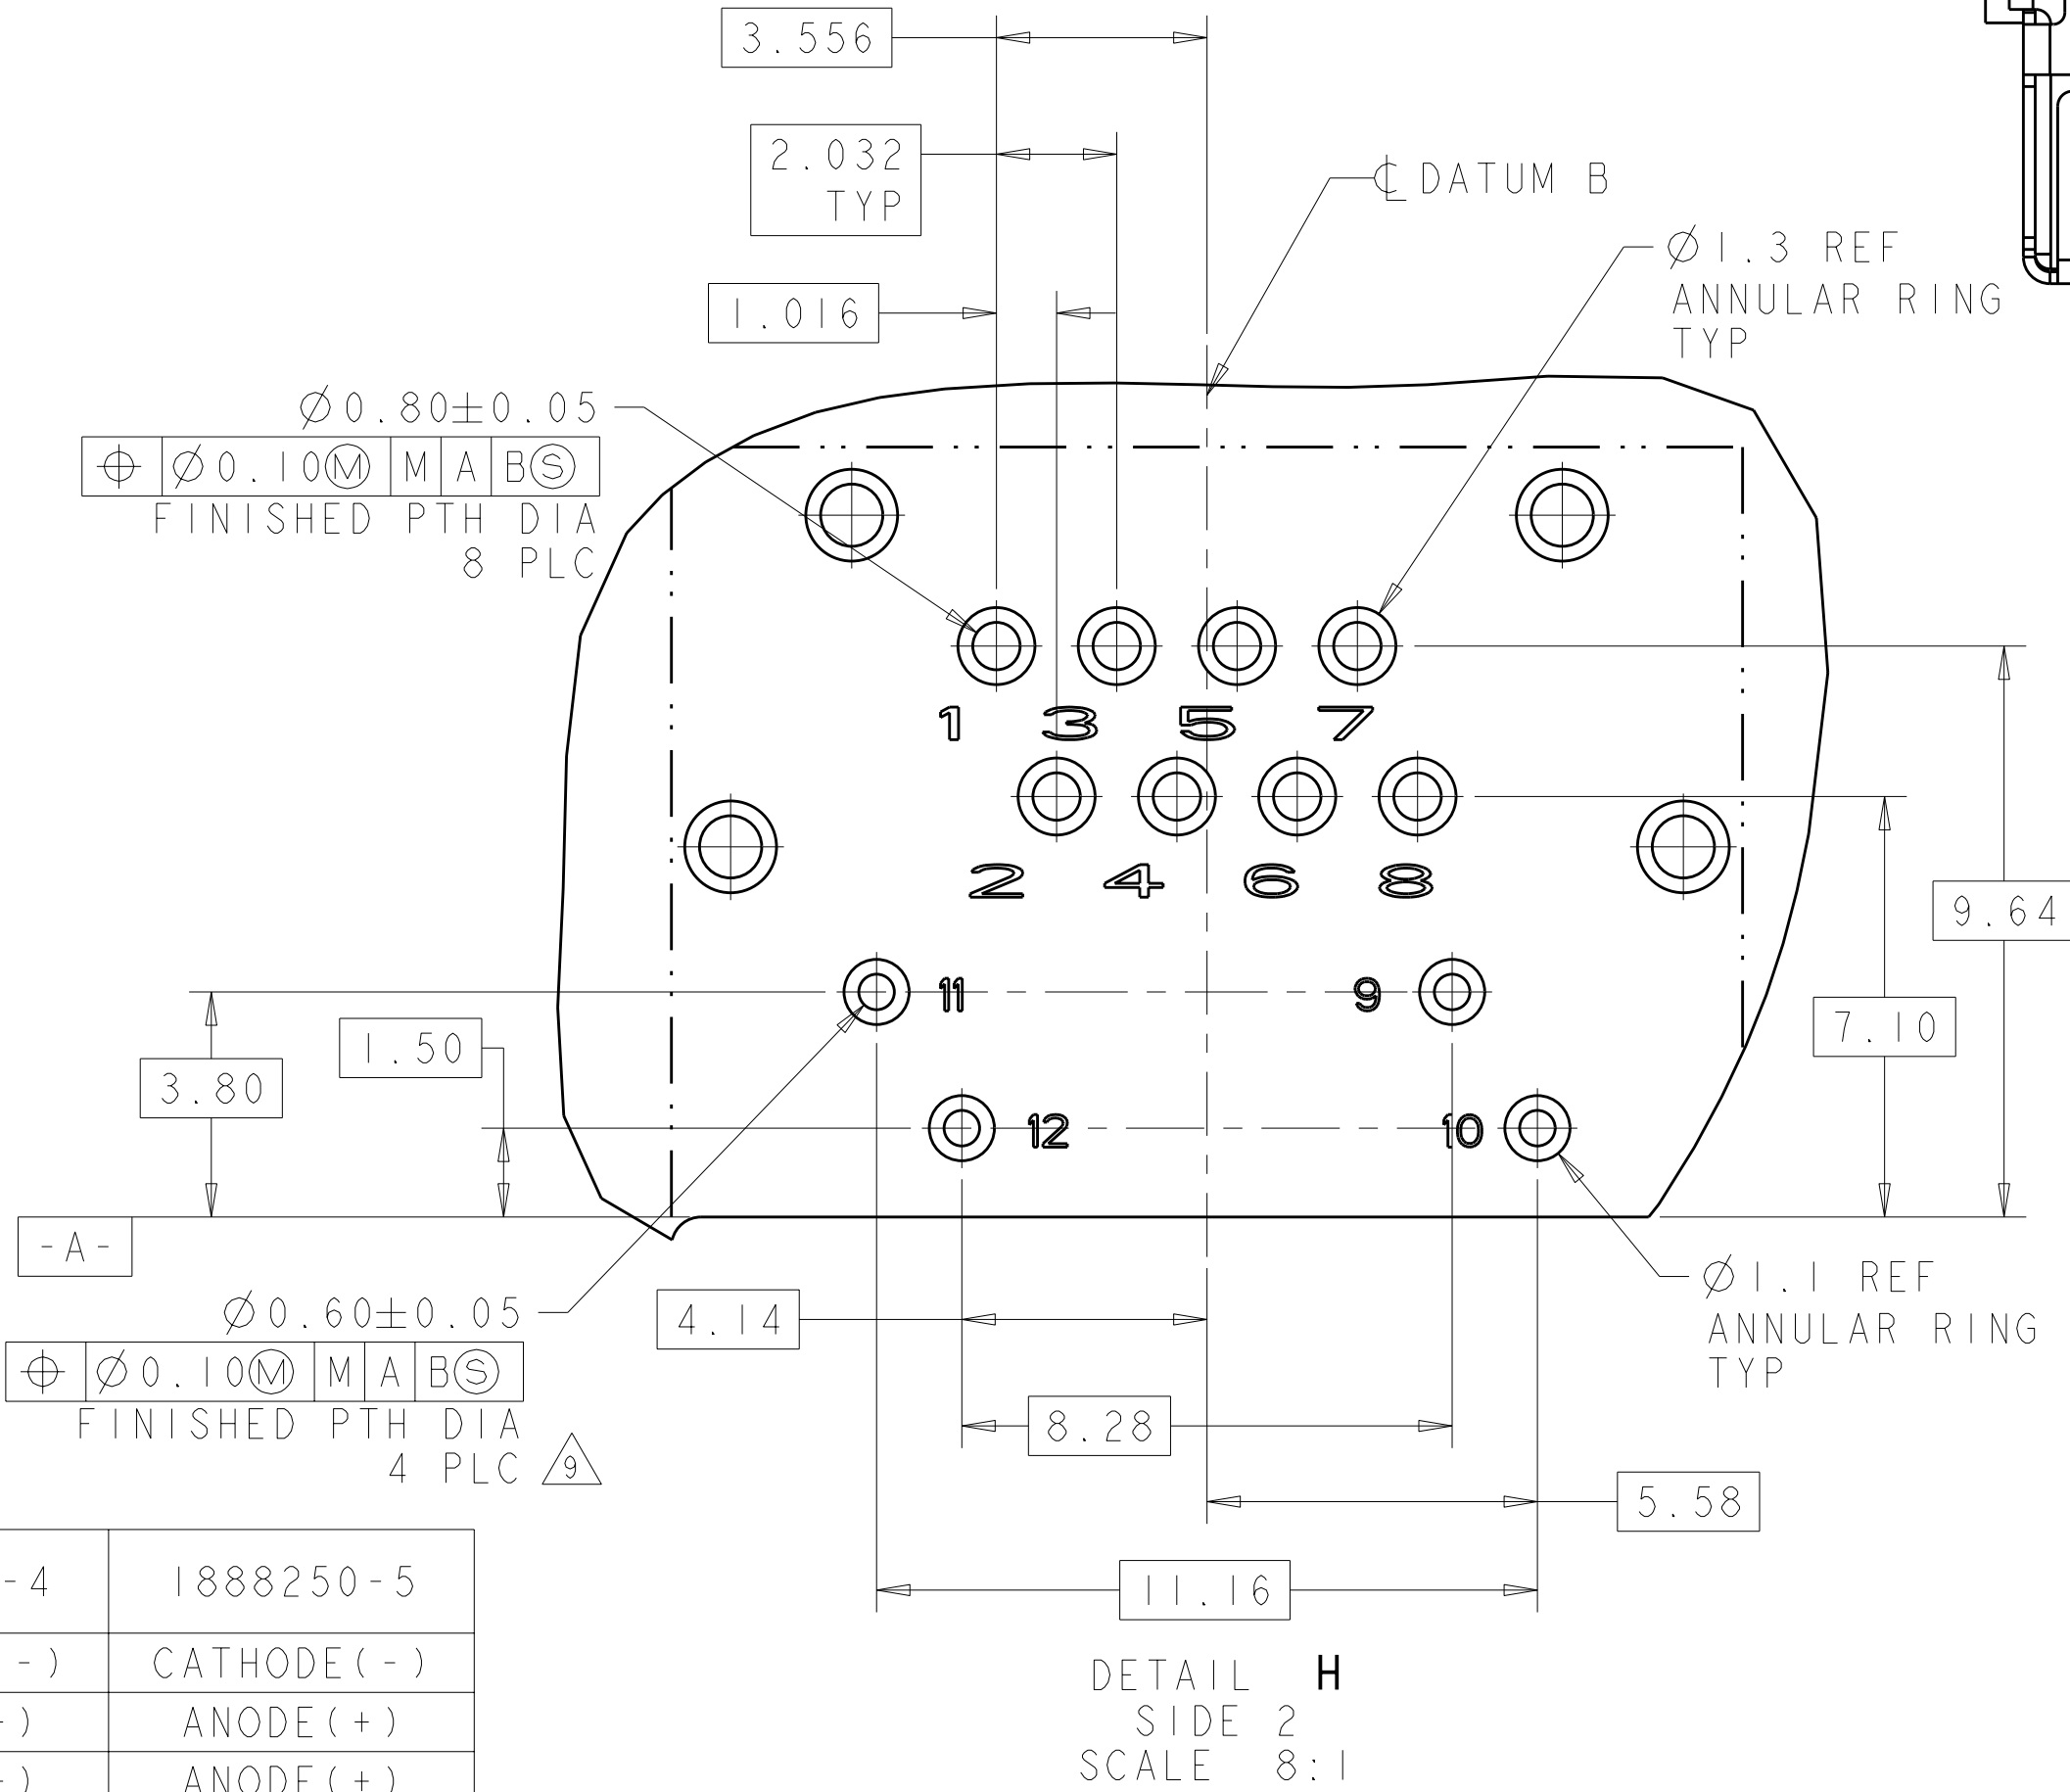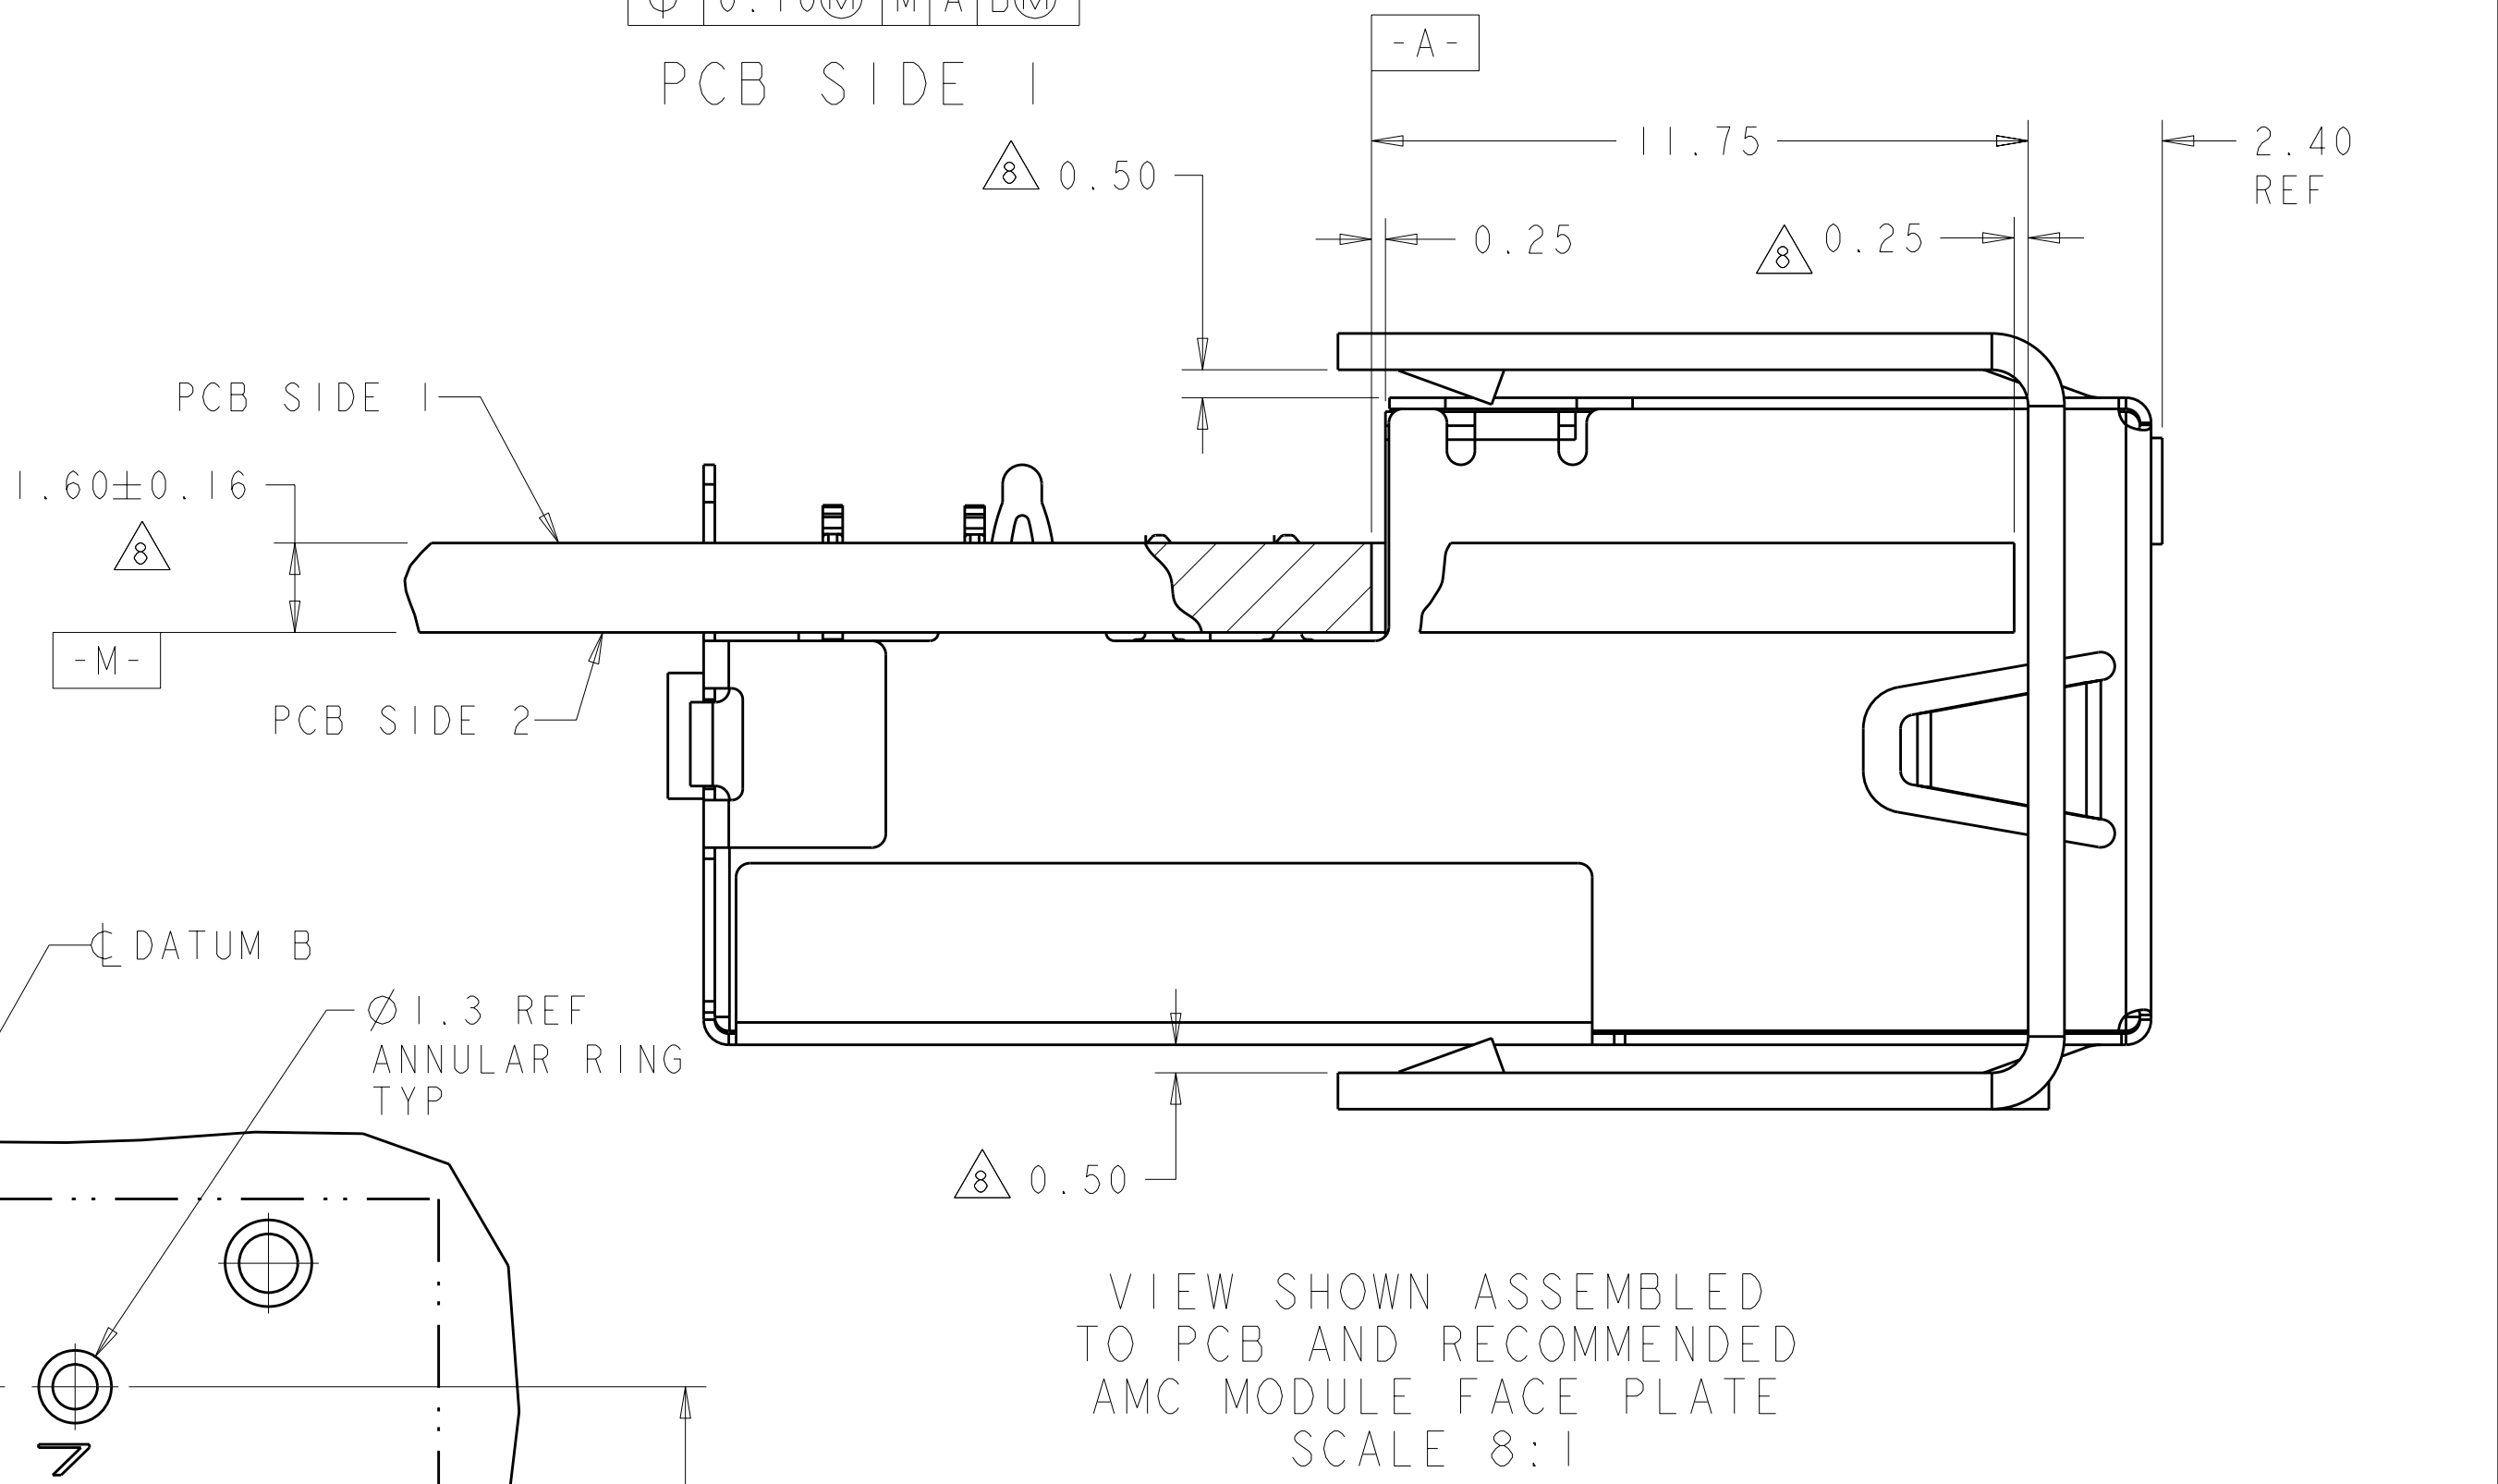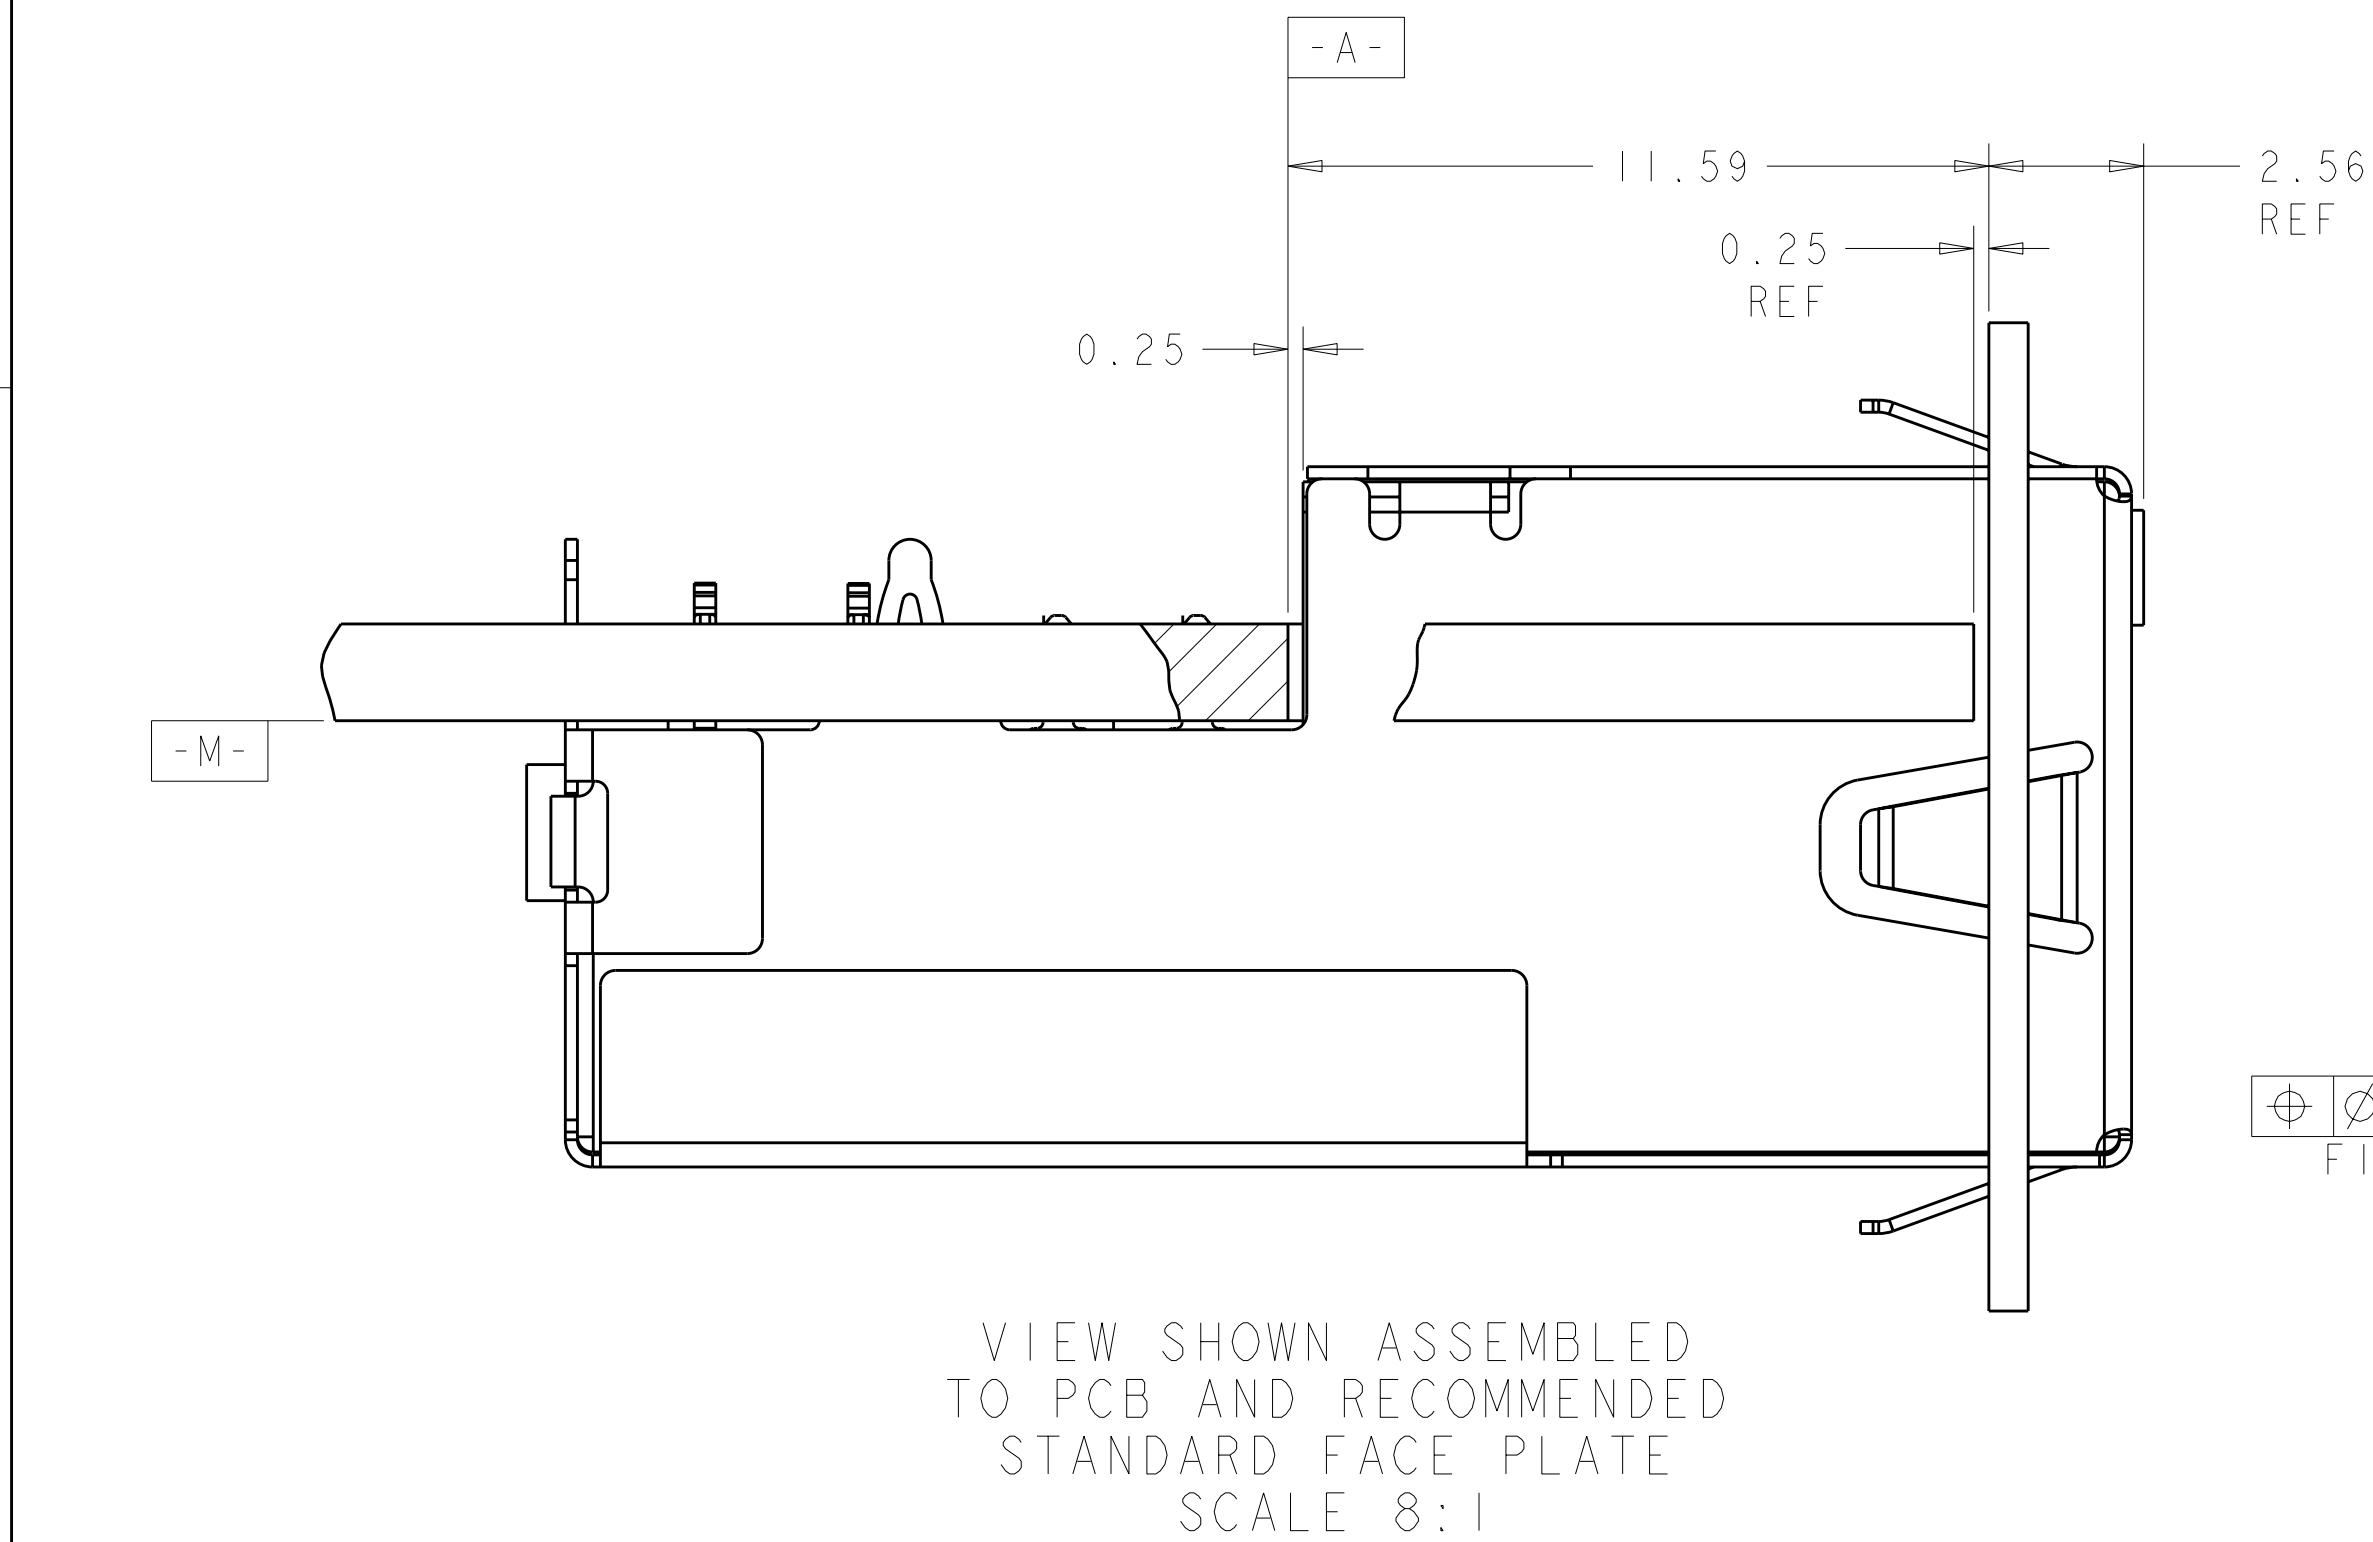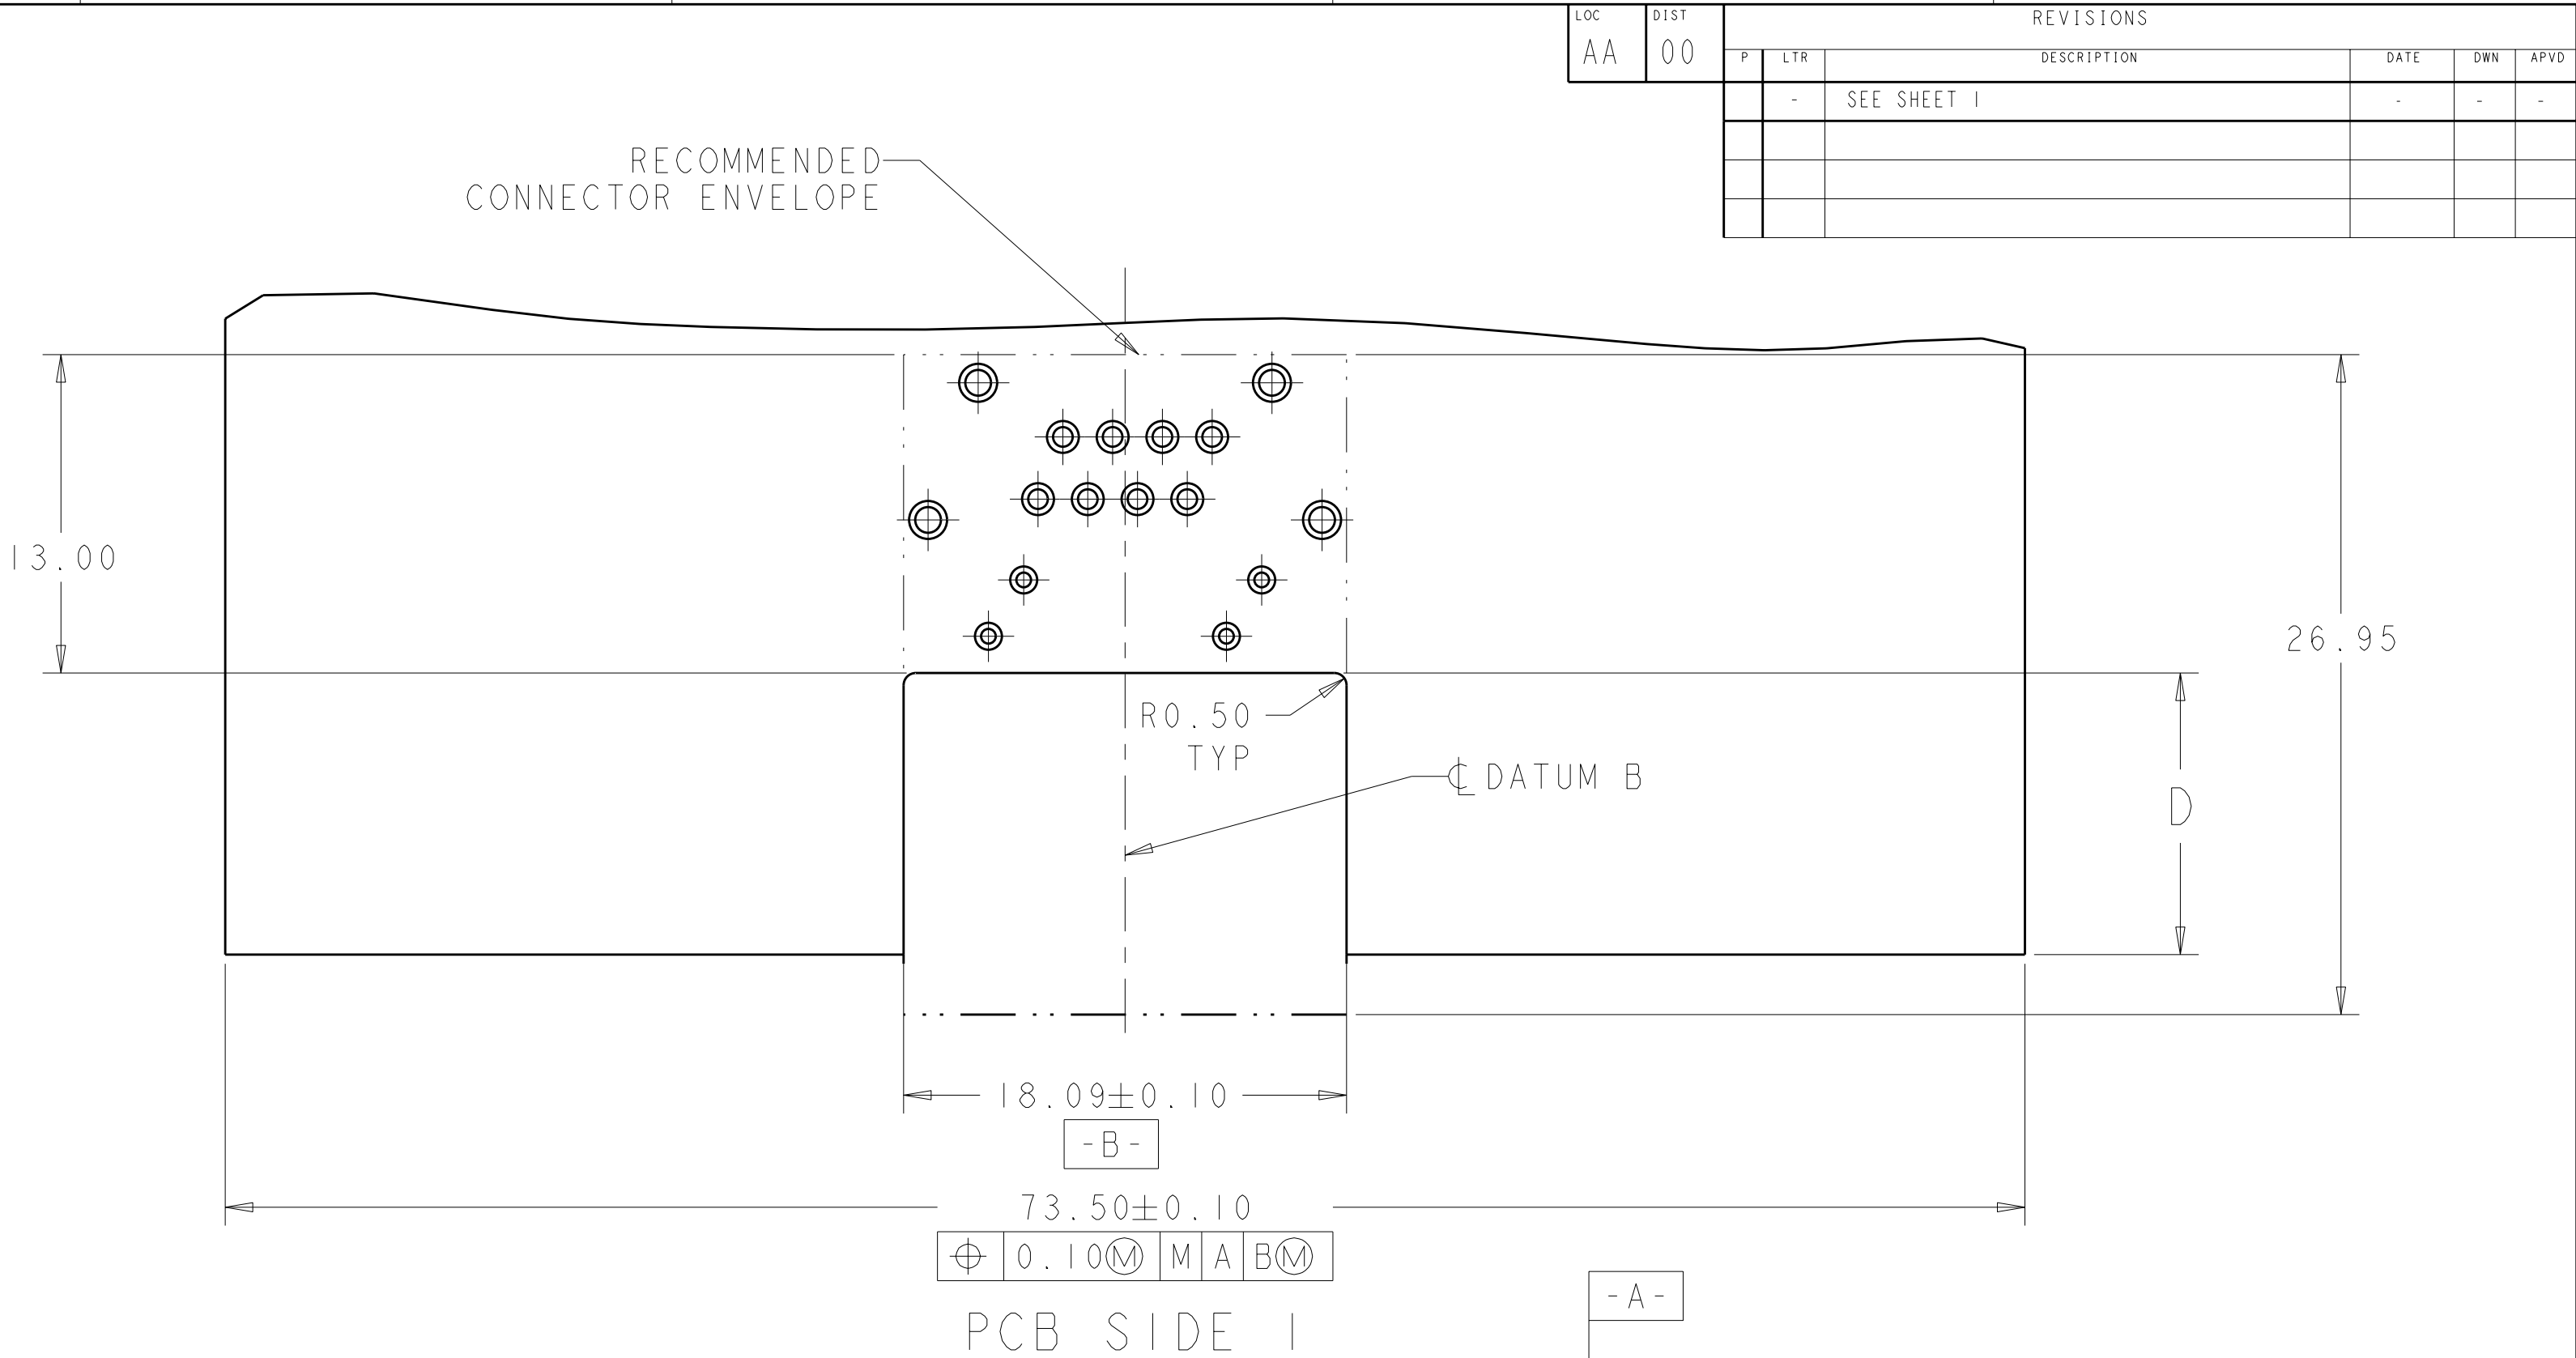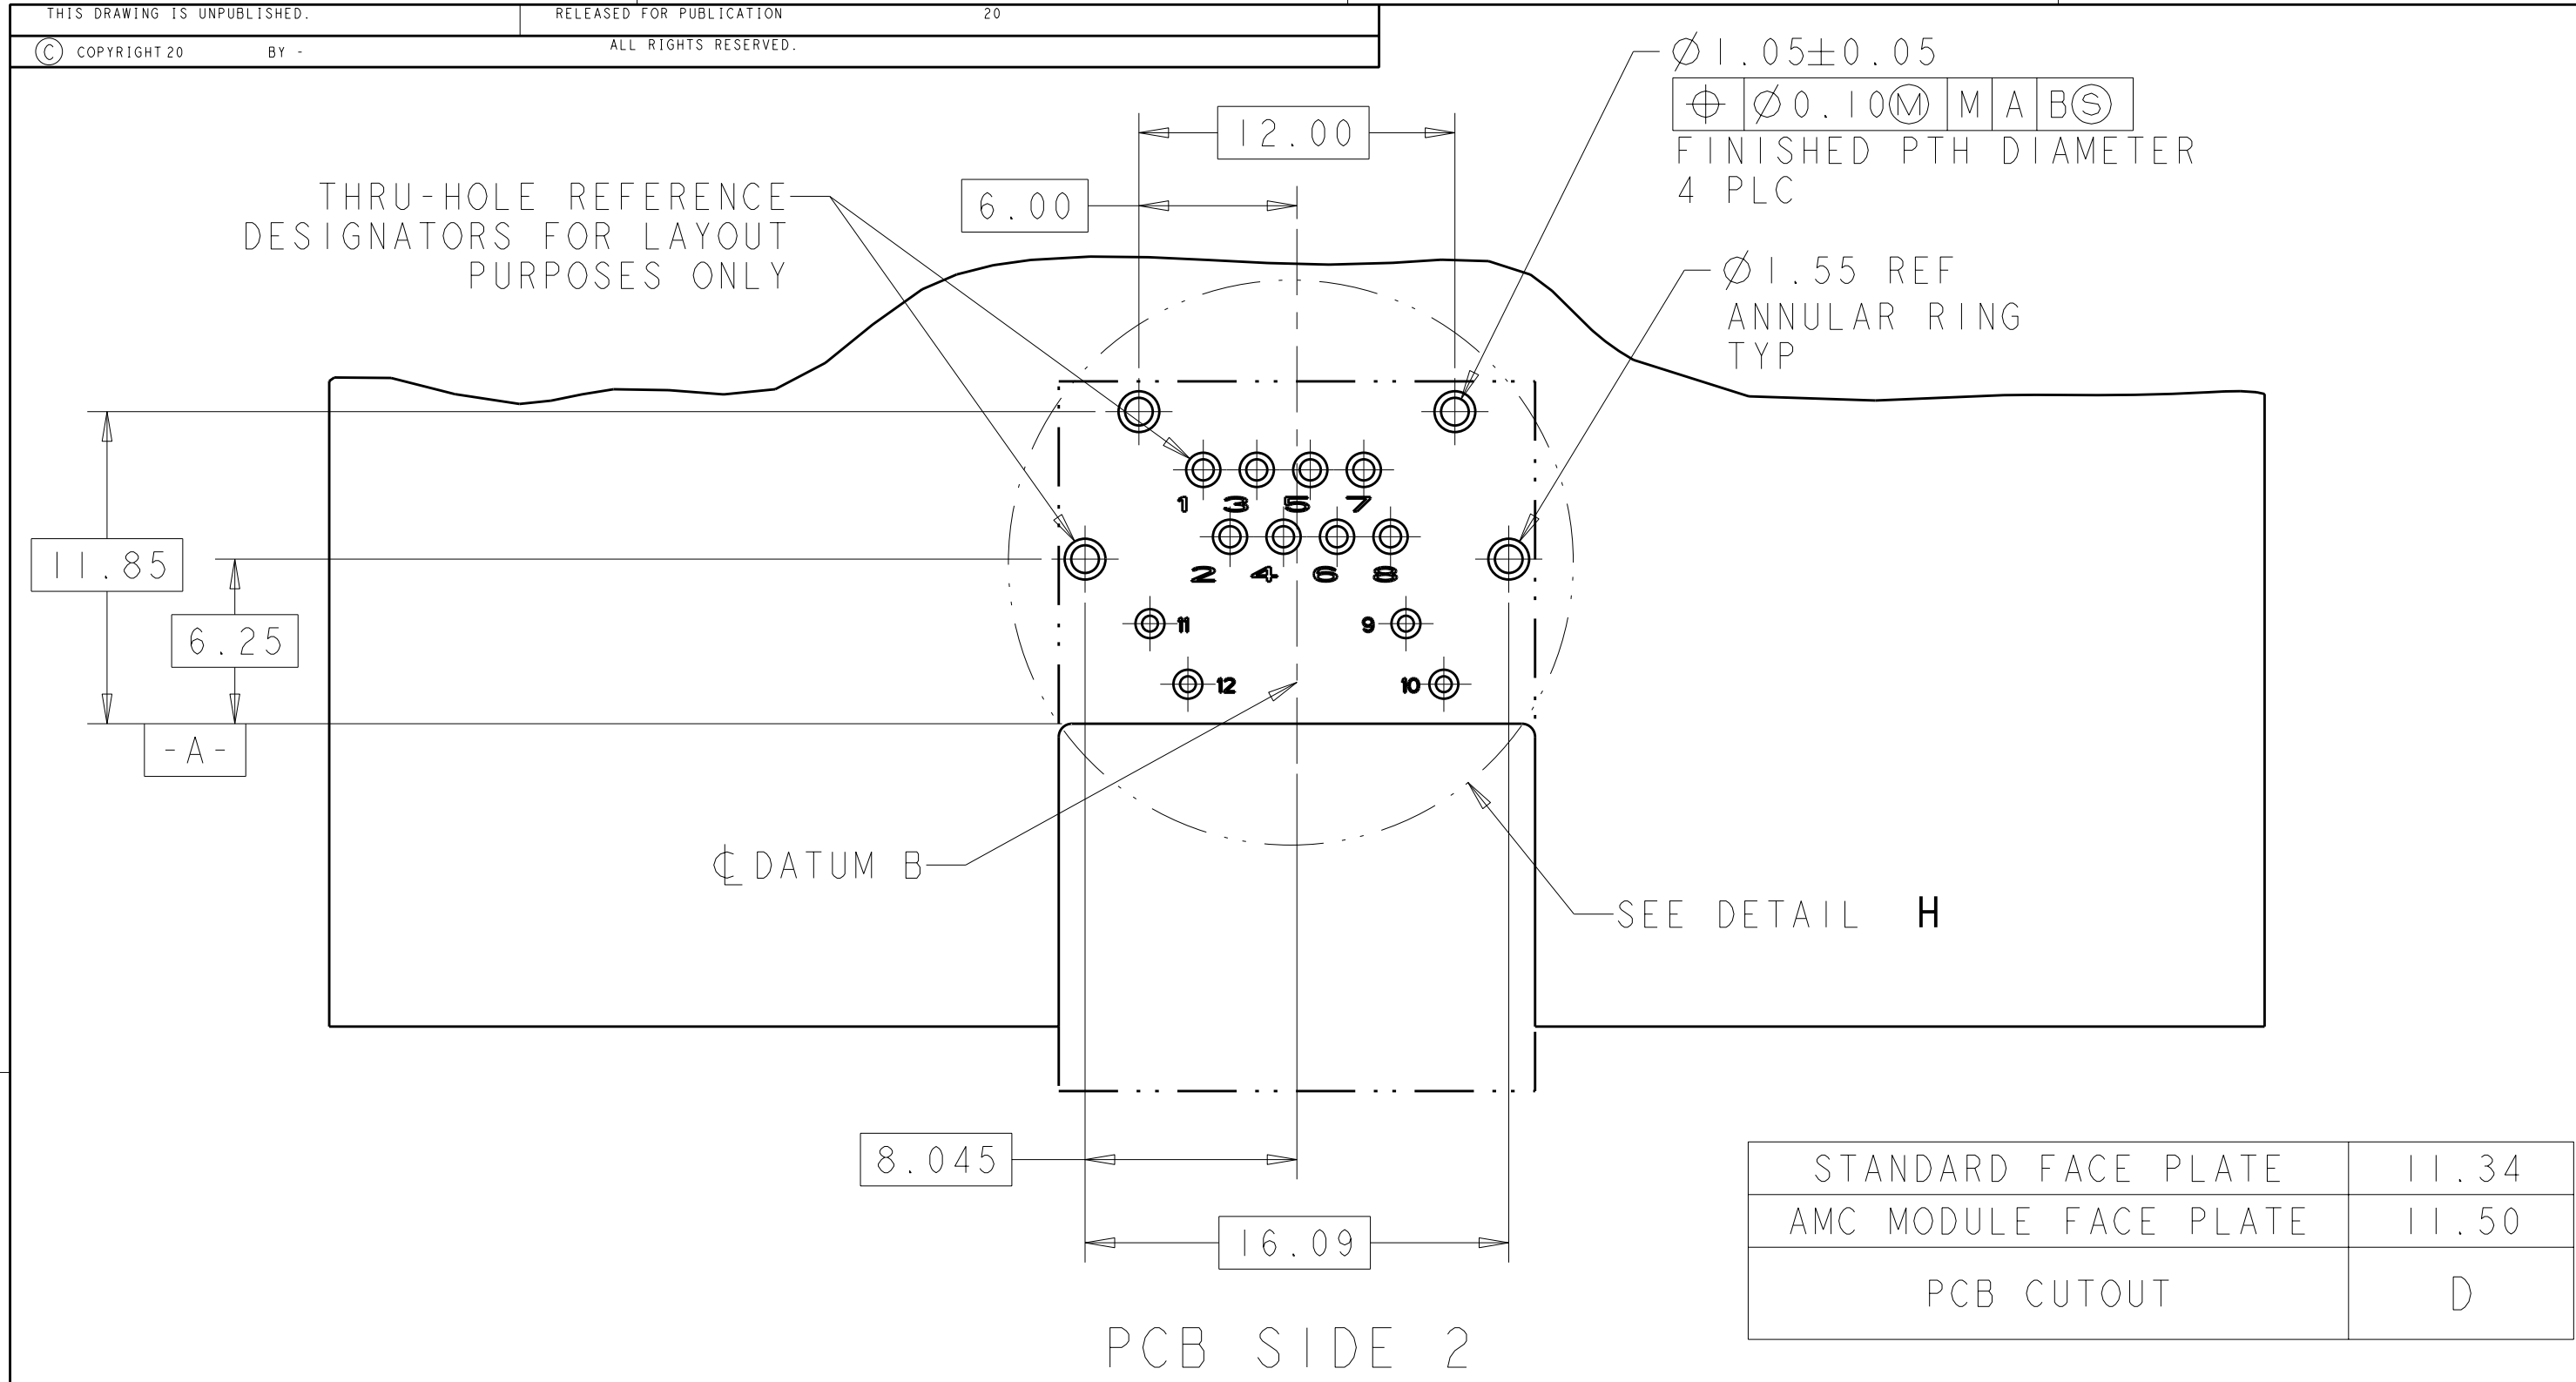

	PIN #	1888250-1	1888250-2	1888250-3	1888250-4	1888250-5
LED 1	9	CATHODE (-)	ANODE (YEL), CATHODE (GRN)	-	CATHODE (-)	CATHODE (-)
	10	ANODE (+)	ANODE (GRN), CATHODE (YEL)	-	ANODE (+)	ANODE (+)
LED 2	11	ANODE (+)	ANODE (GRN), CATHODE (YEL)	-	ANODE (+)	ANODE (+)
	12	CATHODE (-)	ANODE (YEL), CATHODE (GRN)	-	CATHODE (-)	CATHODE (-)

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: MS/L.A.MAYER	15FEB2008	TE Connectivity	
DIMENSIONS:		CHK: J.WESTMAN	15FEB2008	NAME: CONNECTOR ASSEMBLY, LOW PROFILE, PRESS FIT, MODULAR JACK, 1X1, RJ45	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: S.FLICKINGER	15FEB2008	SIZE: CAGE CODE: DRAWING NO: A100779	
mm		PRODUCT SPEC		RESTRICTED TO	
9 PLC ±		108-2274		C=1888250	
3 PLC ±0.13		APPLICATION SPEC		SCALE: 5:1	
3 PLC ±		114-13179		SHEET 2 OF 3	
4 PLC ±		WEIGHT: -		REV C	
ANGLES ±°		CUSTOMER DRAWING			
FINISH SEE NOTE 1					

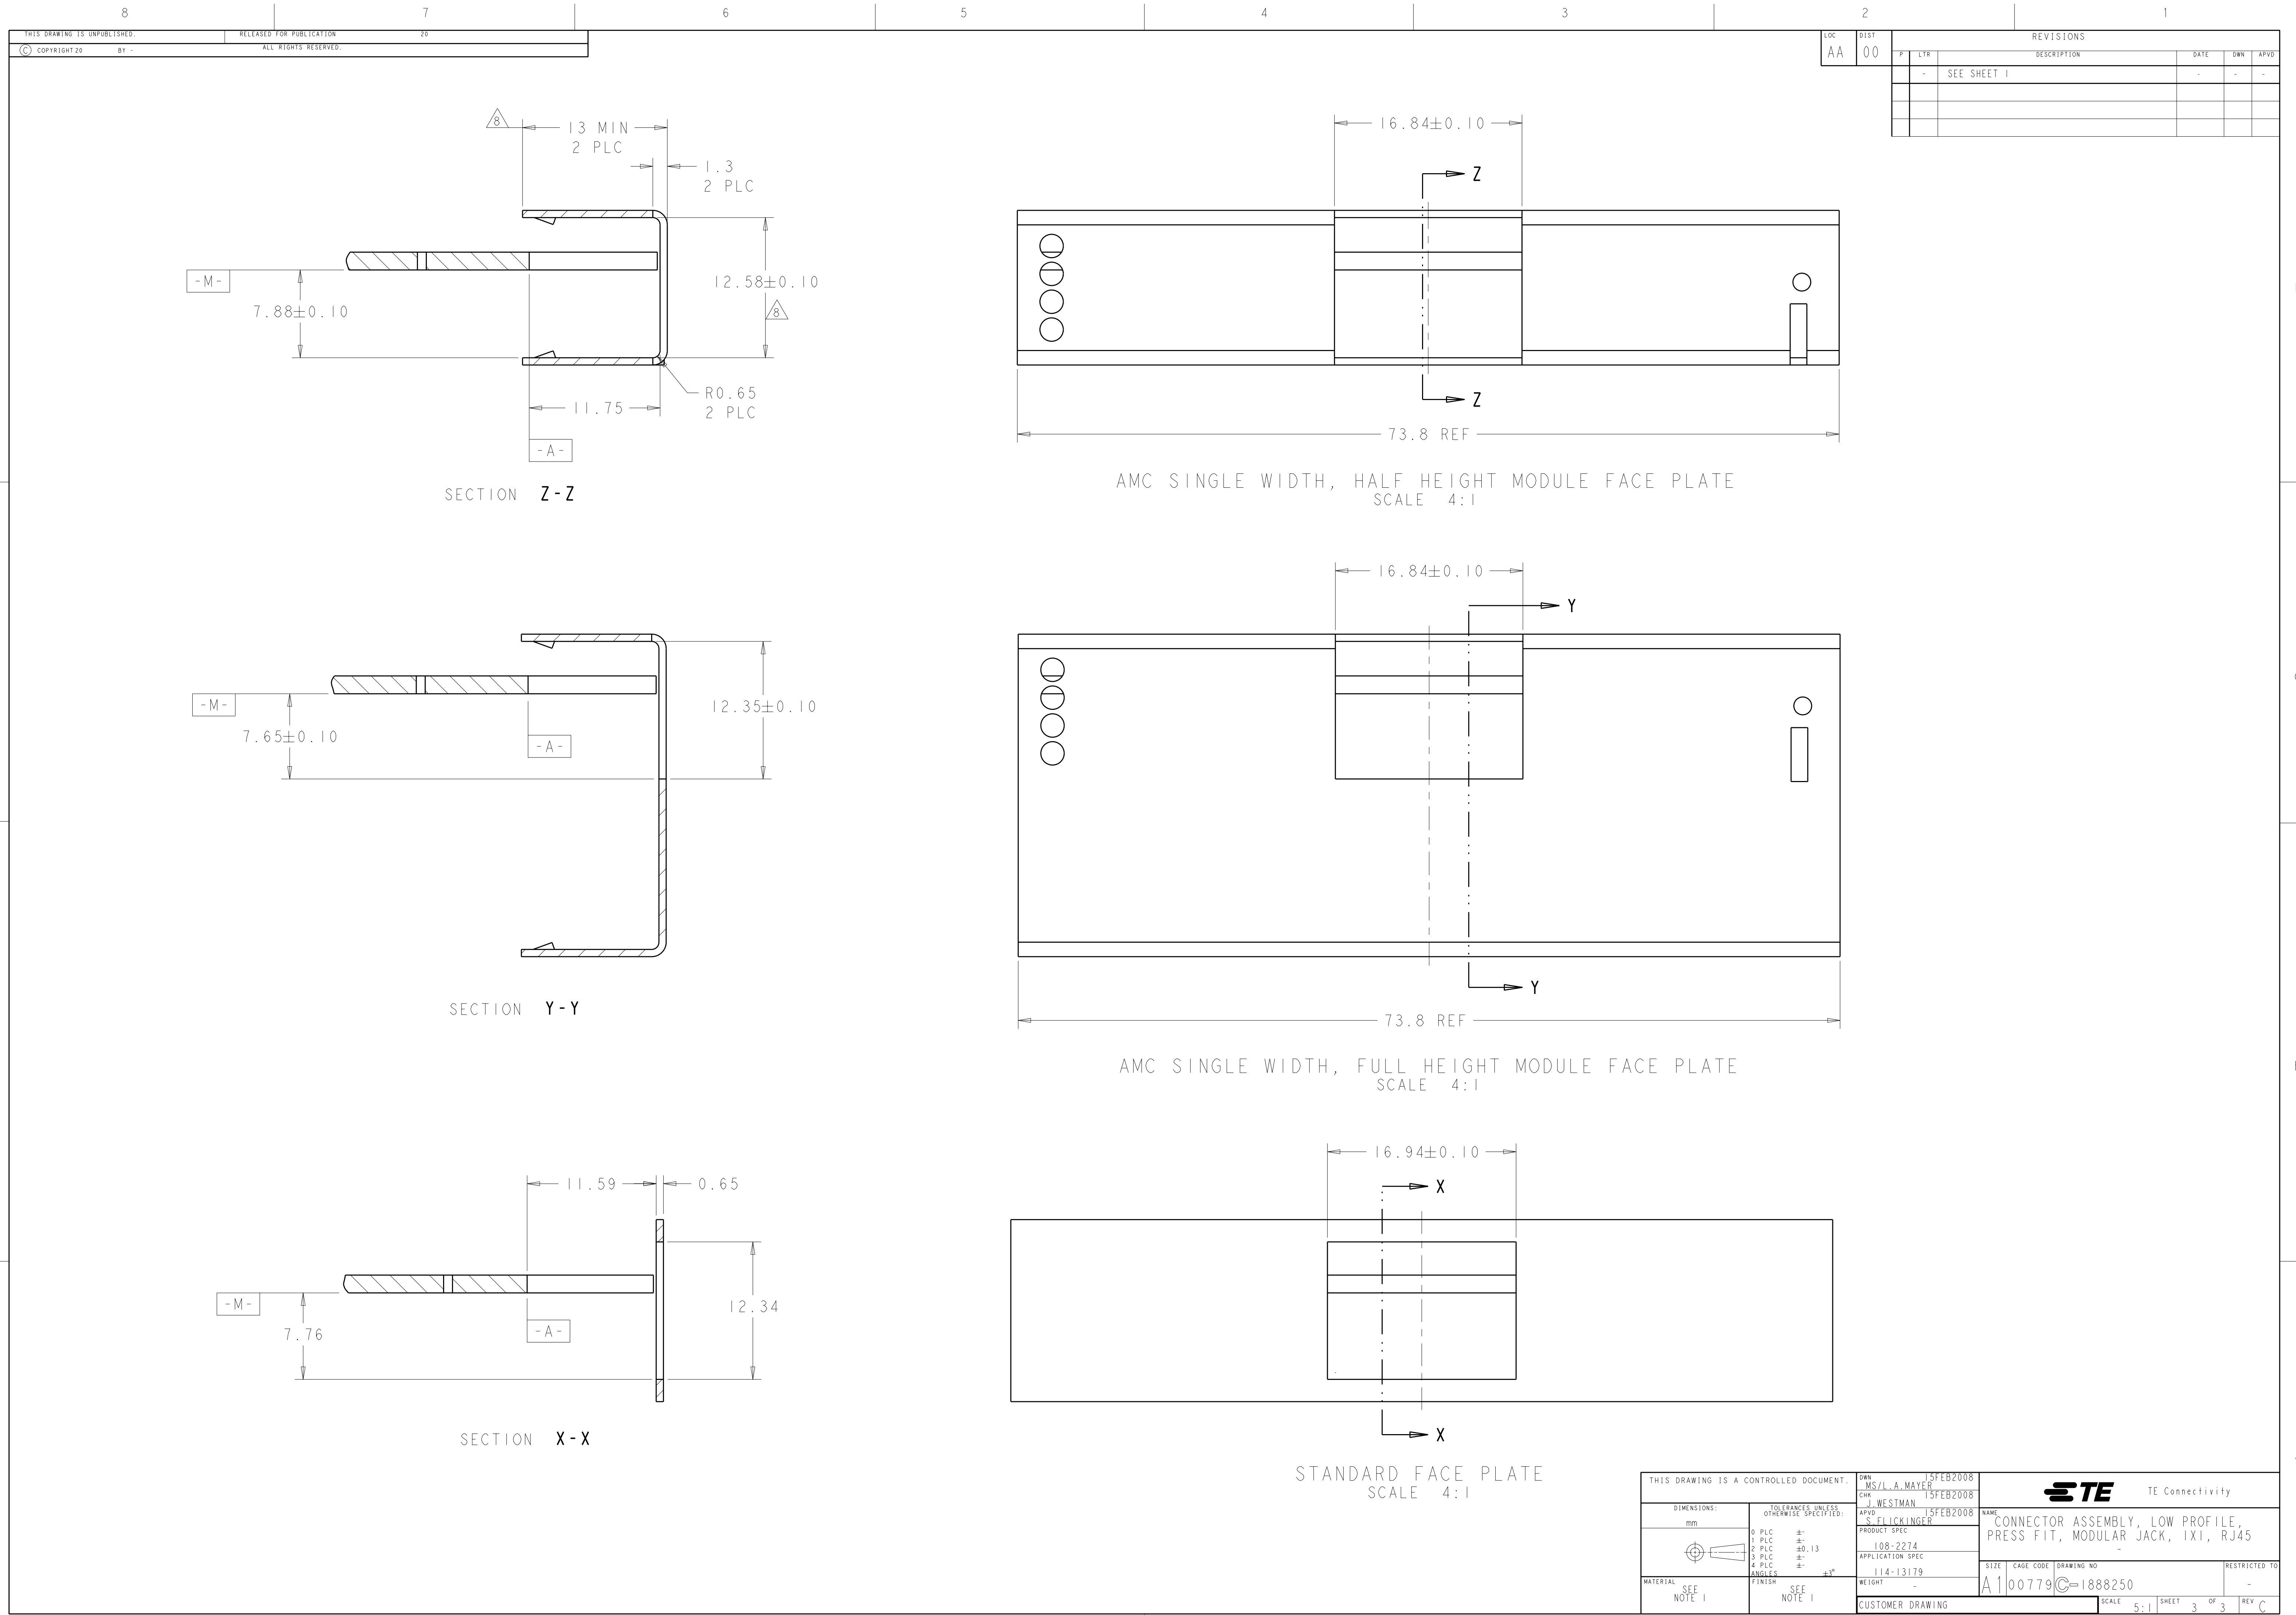

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9