


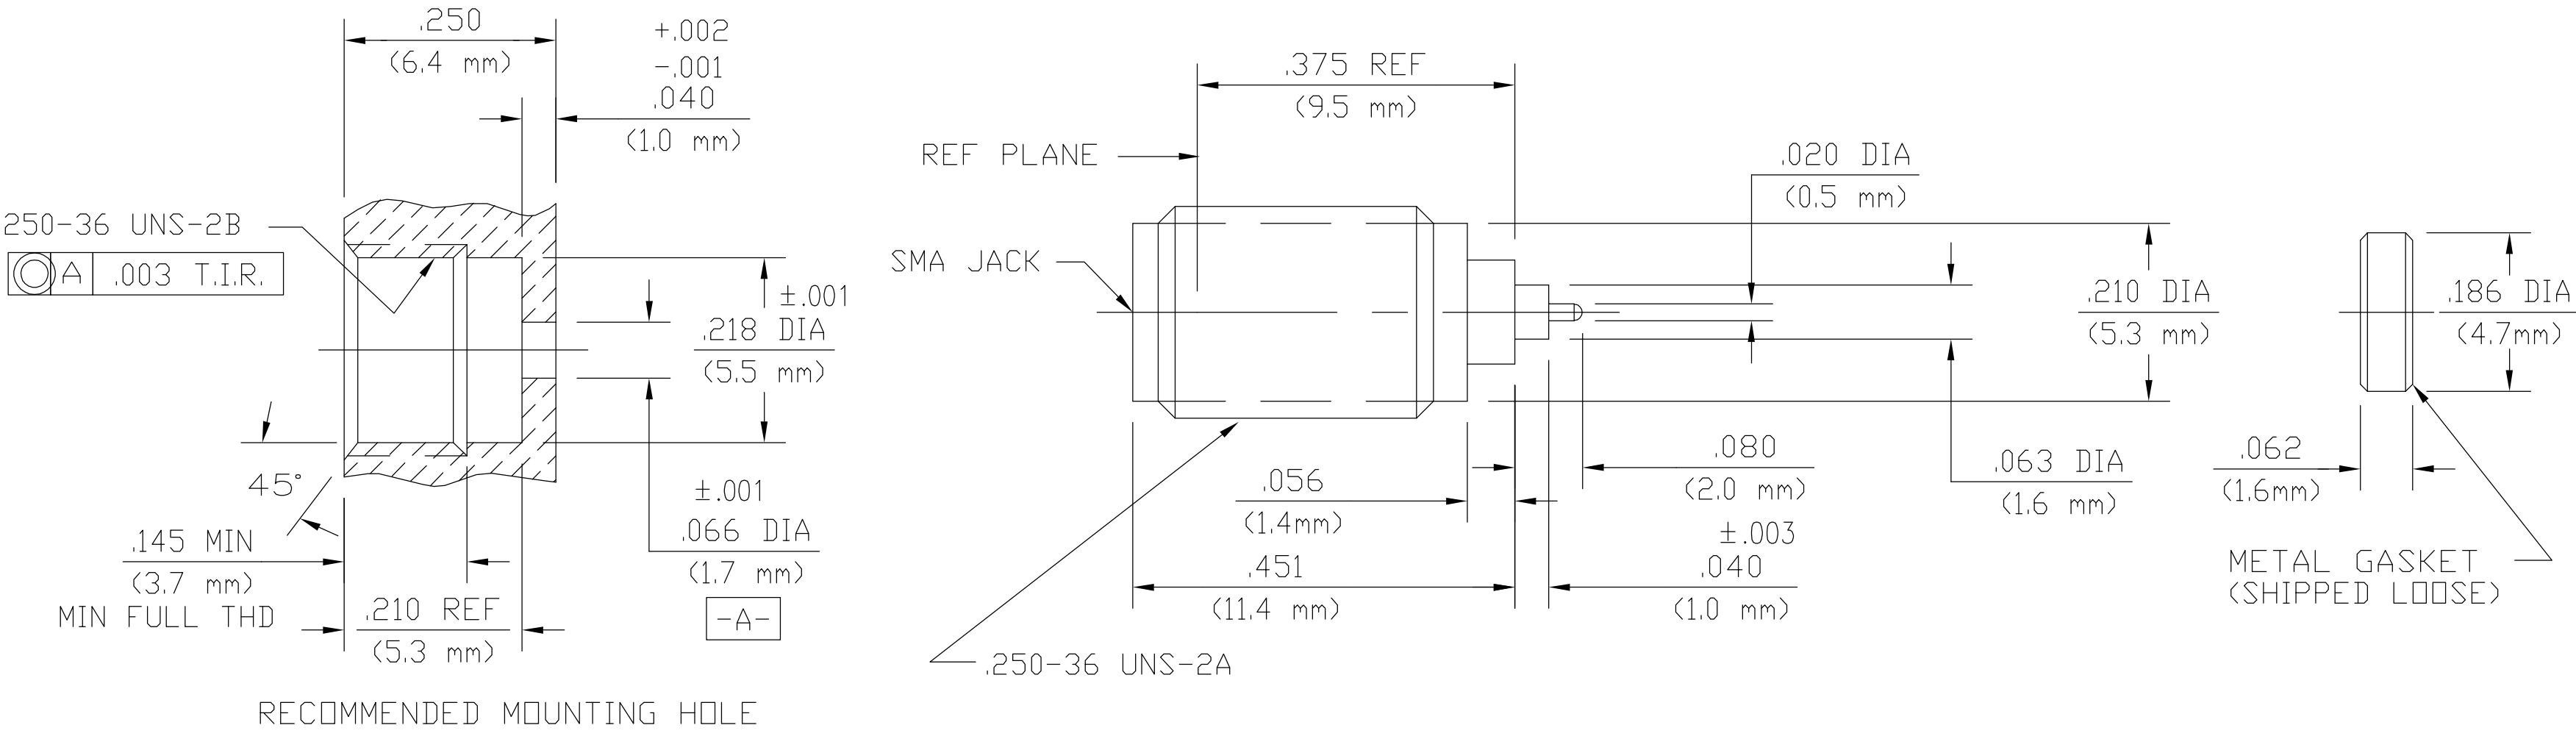

NOTES:
1. CAPTURED CENTER CONTACT

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348	TEMPERATURE RATING -65°C TO +125°C
Frequency Range (GHz) DC - 26.5	FIG 310.2	Vibration - MIL-STD-202, Method 204, Condition D, 20G's
Volt Rating (VRMS MAX) 335 @ Sea Level	Recommended Mating	Shock - MIL-STD-202, Method 213, Condition I
VSWR 1.04 + (.009 F(GHz))	Torque N/A	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) .05√F(GHz)	Mating Characteristics:	EXCEPT HIGH TEMP 115°C
RF Leakage (dB MIN) -(100 - F(GHz))	Insertion (MAX Lbs) 3.0	Moisture Resistance - MIL-STD-202, Method 106
Corona, 70,000 Ft (VRMS MIN) 333	Withdrawal (MIN Oz) 1.0	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Dielectric Withstanding Voltage (VRMS MIN) 1000 @ Sea Level	Force To Engage (In/Lbs MAX) 2.0	Leak Test - MIL-STD-202, Method 112, Condition C, Procedure I, 1 x 10 CC/Sec
Contact Resistance (Milliohms MAX)	Force To Disengage (In/Lbs MAX) 2.0	
Center Contact 10.0	Center Contact Captivation	
Outer Contact 2.0	Axial 6.0 Lbs	
RF High Potential (VRMS MIN @ 5 MHz) 670 @ Sea Level	Radial N/A	
I.R.(Megohms) 5000	Weight (Grams) T.B.D.	

6053227-1		PART NUMBER	
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM A 380	
DIELECTRIC	TFE FLUOROCARBON PER ASTM D 1710	N/A	
CTR CONTACT	BERYLLIUM COPPER PER ASTM B196,	GOLD PLATE PER ASTM B 488	
CONTACT EXT	IRON-NICKEL-COBALT ALLOY PER MIL-I-23011 (KOVAR)	GOLD PLATE PER ASTM B 488	
METAL GASKET	SAE C12L14 STEEL	SILVER PLATE PER ASTM B 700	
HERMETIC SEAL	GLASS BEAD	N/A	
COMPONENT	MATERIAL	FINISH	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L.ROSS 18APR90	
DIMENSIONS: INCHES (mm)		CHK BB 18APR90	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD GDD 18APR90	
0 PLC ± -		NAME	
1 PLC ± -		Tyco Electronics Corporation	
2 PLC ± -		Harrisburg, PA 17105-3608	
3 PLC ± .005		SMA PANEL FEEDTHRU	
4 PLC ± -		JACK RECEPTACLE	
ANGLES ± -		HERMETICALLY SEALED (2058-5119-02)	
FINISH		SIZE CAGE CODE DRAWING NO	
SEE NOTES		A2 00779 C=6053227	
SEE NOTES		RESTRICTED TO	
CUSTOMER DRAWING		SCALE 6:1 SHEET 1 of 1 REV A	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9