


RPC-2.92 Straight Jack

02K14E-270L5

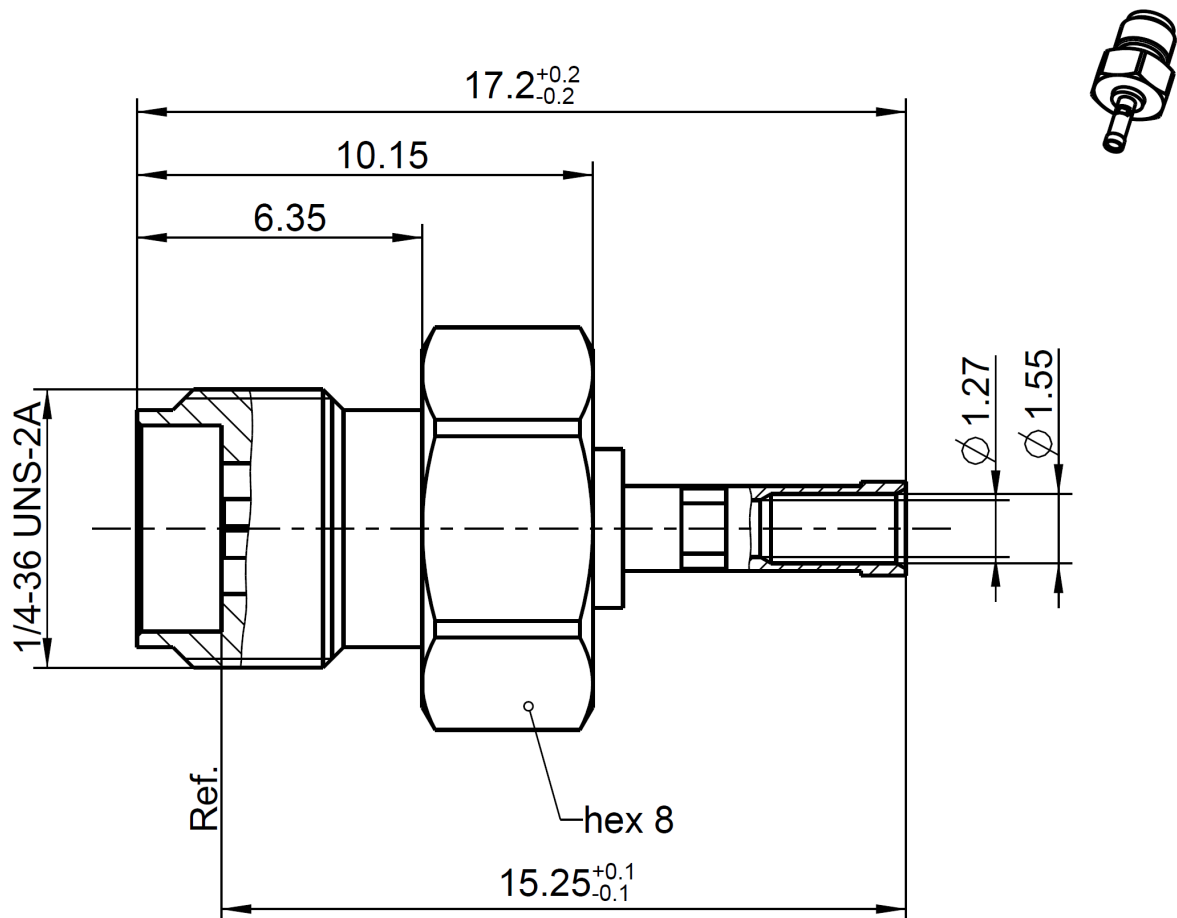

All dimensions are in mm; tolerances according to ISO 2768 m-H

Interface

According to
Mechanically compatible with

IEC 61169-35
RPC-3.50 and SMA

Documents

Assembly instruction

02A14

Material and plating

Connector parts

Center contact
Outer contact
Dielectric

Material

CuBe
Brass
PTFE

Plating

AuroDur®, gold plated
AuroDur®, gold plated

RF_35/05.10/6.1 Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

Technical Data Sheet				Rosenberger			
RPC-2.92		Straight Jack		02K14E-270L5			
Electrical data Impedance50 Ω FrequencyDC to 40 GHz Return loss≥ 21 dB, DC to 20 GHz ≥ 19 dB, 20 GHz to 40 GHz Insertion loss≤ 0.04 x √f(GHz) dB Insulation resistance≥ 5 GΩ Center contact resistance≤ 3.0 mΩ Outer contact resistance≤ 2.0 mΩ Test voltage750 V rms Working voltage250 V rms RF-leakage≥ 100 dB up to 1 GHz - Limitations are possible due to the used cable type - Mechanical data Mating cycles≥ 500 Center contact captivation≥ 20 N Coupling test torque1.70 Nm Recommended torque0.80 Nm to 1.10 Nm Environmental data Temperature range-40°C to +85°C Thermal shockMIL-STD-202, Method 107, Condition B CorrosionMIL-STD-202, Method 101, Condition B VibrationMIL-STD-202, Method 204, Condition D ShockMIL-STD-202, Method 213, Condition I Moisture resistanceMIL-STD-202, Method 106 RoHScompliant Tooling N/A Suitable cables RTK 047, UT 047 Weight 2.6 g/pce							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft		Date		Approved		Date	
Martin Moder		22.03.16		Roland Neuhauser		14.05.19	
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Rev. a00		Engineering change number 19-s138	
				Name M.Ruf		Date 14.05.19	
				Tel. : +49 8684 18-0		Page 2 / 2	
				Email : info@rosenberger.de			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9