


### Features

- Diffused Junction
- High Current Capability and Low Forward Voltage Drop
- Surge Overload Rating to 30A Peak
- Low Reverse Leakage Current
- **Lead Free Finish, RoHS Compliant (Note 4)**

### Mechanical Data

- Case: DO-41, A-405
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Bright Tin. Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Mounting Position: Any
- Ordering Information: See Last Page
- Marking: Type Number
- Weight: DO-41 0.30 grams (approximate)  
A-405 0.20 grams (approximate)

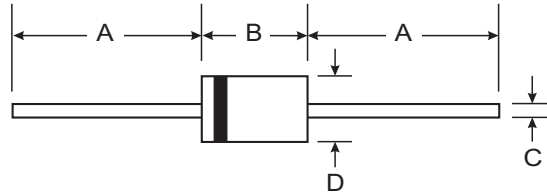

| Dim | DO-41 Plastic |       | A-405 |      |
|-----|---------------|-------|-------|------|
|     | Min           | Max   | Min   | Max  |
| A   | 25.40         | —     | 25.40 | —    |
| B   | 4.06          | 5.21  | 4.10  | 5.20 |
| C   | 0.71          | 0.864 | 0.53  | 0.64 |
| D   | 2.00          | 2.72  | 2.00  | 2.70 |

All Dimensions in mm





"L" Suffix Designates A-405 Package  
No Suffix Designates DO-41 Package

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

| Characteristic                                                                                                        | Symbol                            | 1N 4001/L   | 1N 4002/L | 1N 4003/L | 1N 4004/L | 1N 4005/L | 1N 4006/L | 1N 4007/L | Unit |  |  |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------|-------------|-----------|-----------|-----------|-----------|-----------|-----------|------|--|--|
| Peak Repetitive Reverse Voltage                                                                                       | V <sub>RRM</sub>                  | 50          | 100       | 200       | 400       | 600       | 800       | 1000      | V    |  |  |
| Working Peak Reverse Voltage                                                                                          | V <sub>RWM</sub>                  |             |           |           |           |           |           |           |      |  |  |
| DC Blocking Voltage                                                                                                   | V <sub>R</sub>                    |             |           |           |           |           |           |           |      |  |  |
| RMS Reverse Voltage                                                                                                   | V <sub>R(RMS)</sub>               | 35          | 70        | 140       | 280       | 420       | 560       | 700       | V    |  |  |
| Average Rectified Output Current (Note 1)<br>@ T <sub>A</sub> = 75°C                                                  | I <sub>O</sub>                    | 1.0         |           |           |           |           |           |           | A    |  |  |
| Non-Repetitive Peak Forward Surge Current 8.3ms<br>single half sine-wave superimposed on rated load<br>(JEDEC Method) | I <sub>FSM</sub>                  | 30          |           |           |           |           |           |           | A    |  |  |
| Forward Voltage<br>@ I <sub>F</sub> = 1.0A                                                                            | V <sub>FM</sub>                   | 1.0         |           |           |           |           |           |           | V    |  |  |
| Peak Reverse Current<br>@ T <sub>A</sub> = 25°C<br>at Rated DC Blocking Voltage<br>@ T <sub>A</sub> = 100°C           | I <sub>RM</sub>                   | 5.0<br>50   |           |           |           |           |           |           | μA   |  |  |
| Typical Junction Capacitance (Note 2)                                                                                 | C <sub>j</sub>                    | 15          |           |           |           |           | 8         |           | pF   |  |  |
| Typical Thermal Resistance Junction to Ambient                                                                        | R <sub>θJA</sub>                  | 100         |           |           |           |           |           |           | K/W  |  |  |
| Maximum DC Blocking Voltage Temperature                                                                               | T <sub>A</sub>                    | +150        |           |           |           |           |           |           | °C   |  |  |
| Operating and Storage Temperature Range (Note 3)                                                                      | T <sub>j</sub> , T <sub>STG</sub> | -65 to +150 |           |           |           |           |           |           | °C   |  |  |

- Notes:
1. Leads maintained at ambient temperature at a distance of 9.5mm from the case.
  2. Measured at 1. MHz and applied reverse voltage of 4.0V DC.
  3. JEDEC Value.
  4. RoHS revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied, see EU Directive Annex Notes 5 and 7.

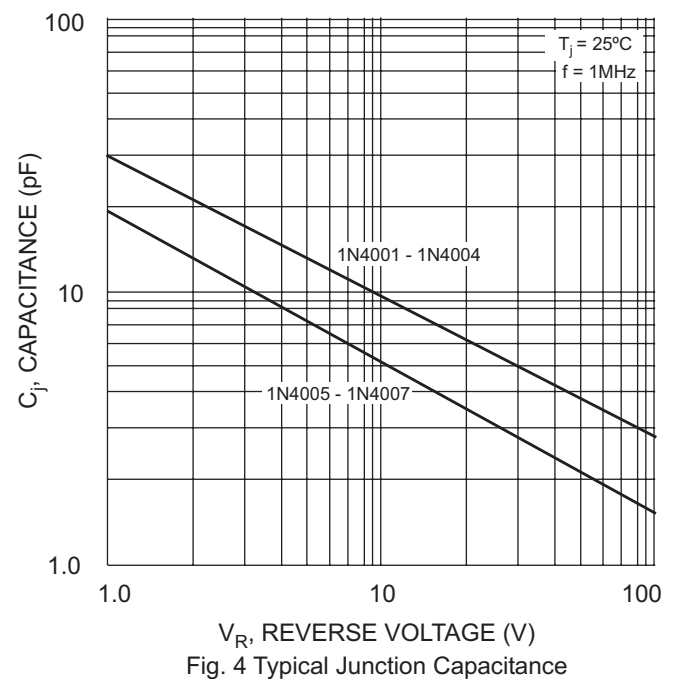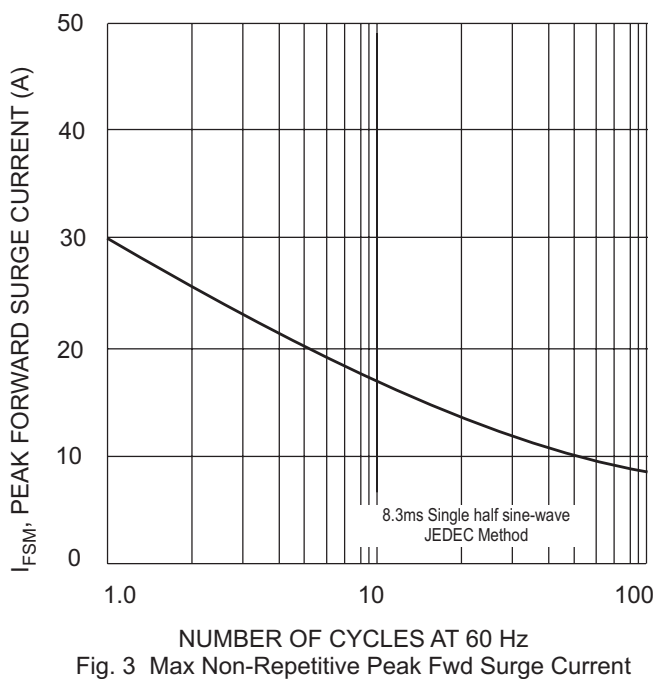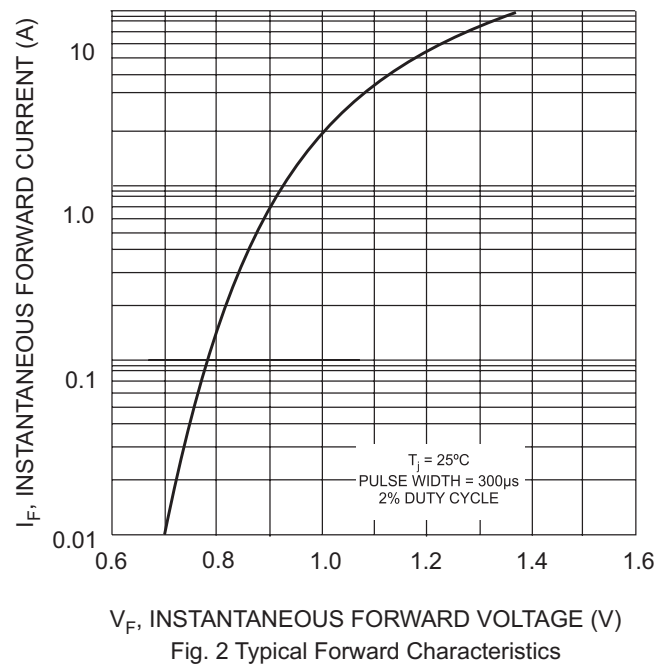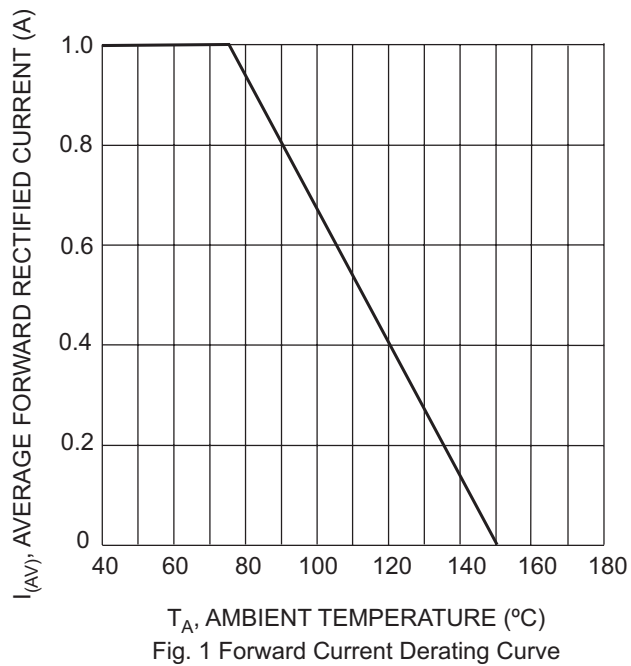

## Ordering Information (Note 5)

| Device    | Packaging     | Shipping                |
|-----------|---------------|-------------------------|
| 1N4001-A  | DO-41 Plastic | 5K/Ammo Pack            |
| 1N4001-B  | DO-41 Plastic | 1K/Bulk                 |
| 1N4001-T  | DO-41 Plastic | 5K/Tape & Reel, 13-inch |
| 1N4002-A  | DO-41 Plastic | 5K/Ammo Pack            |
| 1N4002-B  | DO-41 Plastic | 1K/Bulk                 |
| 1N4002-T  | DO-41 Plastic | 5K/Tape & Reel, 13-inch |
| 1N4003-A  | DO-41 Plastic | 5K/Ammo Pack            |
| 1N4003-B  | DO-41 Plastic | 1K/Bulk                 |
| 1N4003-T  | DO-41 Plastic | 5K/Tape & Reel, 13-inch |
| 1N4004-A  | DO-41 Plastic | 5K/Ammo Pack            |
| 1N4004-B  | DO-41 Plastic | 1K/Bulk                 |
| 1N4004-T  | DO-41 Plastic | 5K/Tape & Reel, 13-inch |
| 1N4005-A  | DO-41 Plastic | 5K/Ammo Pack            |
| 1N4005-B  | DO-41 Plastic | 1K/Bulk                 |
| 1N4005-T  | DO-41 Plastic | 5K/Tape & Reel, 13-inch |
| 1N4006-A  | DO-41 Plastic | 5K/Ammo Pack            |
| 1N4006-B  | DO-41 Plastic | 1K/Bulk                 |
| 1N4006-T  | DO-41 Plastic | 5K/Tape & Reel, 13-inch |
| 1N4007-A  | DO-41 Plastic | 5K/Ammo Pack            |
| 1N4007-B  | DO-41 Plastic | 1K/Bulk                 |
| 1N4007-T  | DO-41 Plastic | 5K/Tape & Reel, 13-inch |
| 1N4001L-T | A-405         | 5K/Tape & Reel, 13-inch |
| 1N4002L-T | A-405         | 5K/Tape & Reel, 13-inch |
| 1N4003L-T | A-405         | 5K/Tape & Reel, 13-inch |
| 1N4004L-T | A-405         | 5K/Tape & Reel, 13-inch |
| 1N4005L-T | A-405         | 5K/Tape & Reel, 13-inch |
| 1N4006L-T | A-405         | 5K/Tape & Reel, 13-inch |
| 1N4007L-T | A-405         | 5K/Tape & Reel, 13-inch |

Notes: 5. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02008.pdf>

### IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

### LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9