



Glass MELF Switching Diode

Qualified per MIL-PRF-19500/116

Qualified Levels:
JAN, JANTX, and
JANTXV

DESCRIPTION

This popular 1N4148UR-1 JEDEC registered switching/signal diode features internal metallurgical bonded construction for military grade products per MIL-PRF-19500/116. Previously listed as a CDLL4148 this small low capacitance diode, with very fast switching speeds, is hermetically sealed and bonded into a double-plug DO-213AA package. It may be used in a variety of very high speed applications including switchers, detectors, transient OR'ing, logic arrays, blocking, as well as low-capacitance steering diodes, etc. Microsemi also offers a variety of other switching/signal diodes.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Surface mount equivalent of popular JEDEC registered 1N4148 number.
- Hermetically sealed glass construction.
- Metallurgically bonded.
- Double plug construction.
- Very low capacitance.
- Very fast switching speeds with minimal reverse recovery times.
- JAN, JANTX, and JANTXV qualification is available per MIL-PRF-19500/116. (See [part nomenclature](#) for all available options.)
- RoHS compliant version available (commercial grade only).


APPLICATIONS / BENEFITS

- High frequency data lines.
- Small size for high density mounting using the surface mount method (see package illustration).
- RS-232 & RS-422 interface networks.
- Ethernet 10 Base T.
- Low capacitance steering or blocking.
- LAN.
- Computers.

MAXIMUM RATINGS @ 25 °C


| Parameters/Test Conditions | Symbol | Value | Unit |
|---|-----------------------------------|-------------|--------|
| Junction and Storage Temperature | T _J & T _{STG} | -65 to +175 | °C |
| Thermal Resistance Junction-to-Ambient ⁽¹⁾ | R _{θJA} | 325 | °C/W |
| Thermal Resistance Junction-to-Endcap ⁽²⁾ | R _{θJEC} | 100 | °C/W |
| Maximum Breakdown Voltage | V _(BR) | 100 | V |
| Working Peak Reverse Voltage | V _{RWM} | 75 | V |
| Average Rectified Current @ T _A = 75 °C ⁽³⁾ | I _O | 200 | mA |
| Non-Repetitive Sinusoidal Surge Current (tp = 8.3 ms) | I _{FSM} | 2 | A (pk) |

- NOTES:**
1. T_A = +75°C on printed circuit board (PCB), PCB = FR4 - .0625 inch (1.59 mm) 1-layer 1-Oz Cu, horizontal, in still air; pads = .061 inch (1.55 mm) x .105 inch (2.67 mm); R_{θJA} with a defined PCB thermal resistance condition included, is measured at I_O = 200 mA dc.
 2. See [Figure 2](#) for thermal impedance curves.
 3. See [Figure 1](#) for derating.

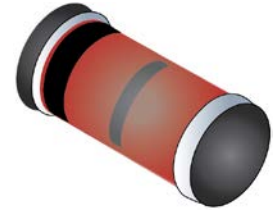


DO-213AA Package

Also available in:

DO-35 package
(axial-leaded)
 [1N4148-1](#)

UB package
(surface mount)
 [1N4148UB](#)

UB2 package
(2-Pin surface mount)
 [1N4148UB2](#)

UBC package
(Ceramic Lid surface mount)
 [1N4148UBC](#)

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Hermetically sealed glass case package.
- TERMINALS: Tin/lead plated or RoHS compliant matte-tin (on commercial grade only) over copper clad steel. Solderable per MIL-STD-750, method 2026.
- POLARITY: Cathode end is banded.
- MOUNTING: The axial coefficient of expansion (COE) of this device is approximately +6PPM/°C. The COE of the mounting surface system should be selected to provide a suitable match with this device.
- MARKING: Part number.
- TAPE & REEL option: Standard per EIA-296. Consult factory for quantities.
- WEIGHT: 0.2 grams.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

JAN 1N4148 UR -1 (e3)

Reliability Level

JAN = JAN level
 JANTX = JANTX level
 JANTXV = JANTXV level
 See **1N6642US** for JANS level
 Blank = Commercial grade

JEDEC type number

(see [Electrical Characteristics](#) table)

RoHS Compliance

e3 = RoHS compliant (on commercial grade only)
 Blank = non-RoHS compliant

Metallurgically Bonded

MELF Surface Mount

SYMBOLS & DEFINITIONS

| Symbol | Definition |
|-----------|---|
| I_R | Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature. |
| I_o | Average Rectified Forward Current: The output current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle. |
| t_{rr} | Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified decay point after a peak reverse current occurs. |
| V_F | Forward Voltage: The forward voltage the device will exhibit at a specified current (typically shown as maximum value). |
| V_R | Reverse Voltage: The reverse voltage dc value, no alternating component. |
| V_{RWM} | Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range excluding all transient voltages (ref JESD282-B). Also sometimes known as PIV. |

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise noted

| FORWARD VOLTAGE V_{F1} @ $I_F=10$ mA | FORWARD VOLTAGE V_{F2} @ $I_F=100$ mA | REVERSE RECOVERY TIME t_{rr} (Note 1) | FORWARD RECOVERY TIME t_{fr} (Note 2) | REVERSE CURRENT I_{R1} @ 20 V | REVERSE CURRENT I_{R2} @ 75 V | REVERSE CURRENT I_{R3} @ 20 V $T_A=150^\circ\text{C}$ | REVERSE CURRENT I_{R4} @ 75 V $T_A=150^\circ\text{C}$ | CAPACITANCE C (Note 3) | CAPACITANCE C (Note 4) |
|--|---|---|---|------------------------------------|------------------------------------|--|--|------------------------------|------------------------------|
| V | V | ns | ns | nA | μA | μA | μA | pF | pF |
| 0.8 | 1.2 | 5 | 20 | 25 | 0.5 | 35 | 75 | 4.0 | 2.8 |

NOTE 1: $I_F = I_R = 10$ mA, $R_L = 100$ Ohms.

NOTE 2: $I_F = 50$ mA.

NOTE 3: $V_R = 0$ V, $f = 1$ MHz, $V_{SIG} = 50$ mV (pk to pk).

NOTE 4: $V_R = 1.5$ V, $f = 1$ MHz, $V_{SIG} = 50$ mV (pk to pk).

GRAPHS

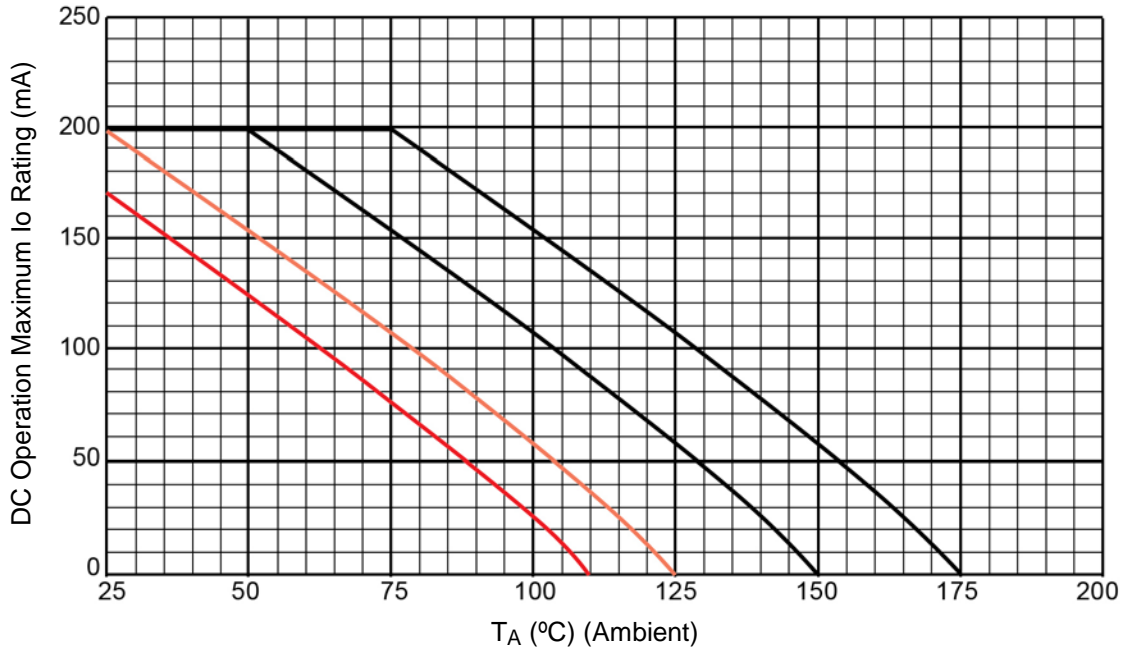


FIGURE 1 – Temperature – Current Derating




FIGURE 2 – Thermal Impedance

PACKAGE DIMENSIONS


| DIM | INCH | | MILLIMETERS | |
|------------|----------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| BD | 0.063 | 0.067 | 1.60 | 1.70 |
| BL | 0.130 | 0.146 | 3.30 | 3.71 |
| ECT | 0.016 | 0.022 | 0.41 | 0.56 |
| S | .001 min | | 0.03 min | |

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Dimensions are pre-solder dip.
3. Referencing to dimension S, minimum clearance of glass body to mounting surface on all orientations.
4. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.

PAD LAYOUT


| | INCH | mm |
|----------|------|------|
| A | .200 | 5.08 |
| B | .055 | 1.40 |
| C | .080 | 2.03 |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[1N4148UR-1](#) [JAN1N4148UR-1](#) [Jantx1N4148UR-1](#) [CDLL4148](#) [JANTXV1N4148UR-1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9