
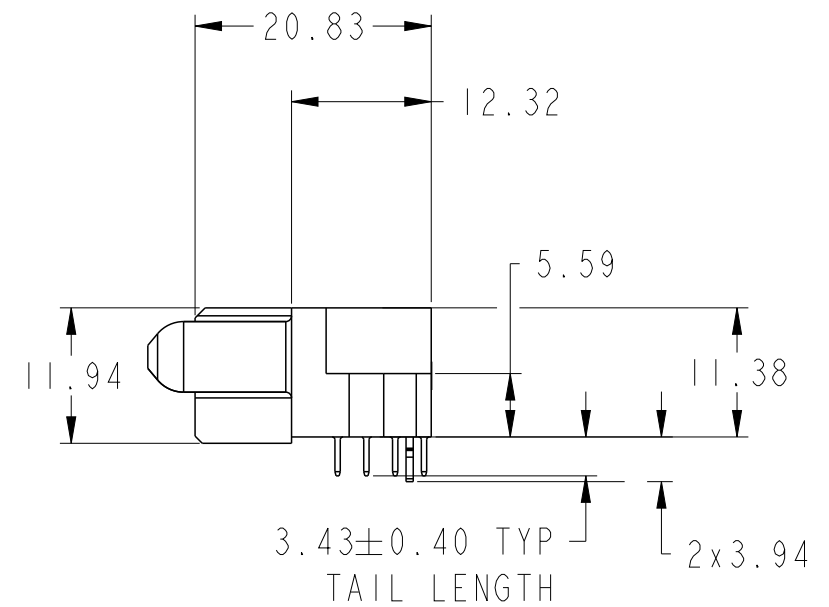
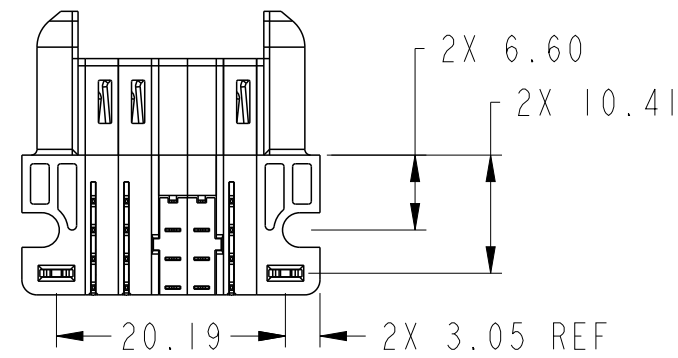
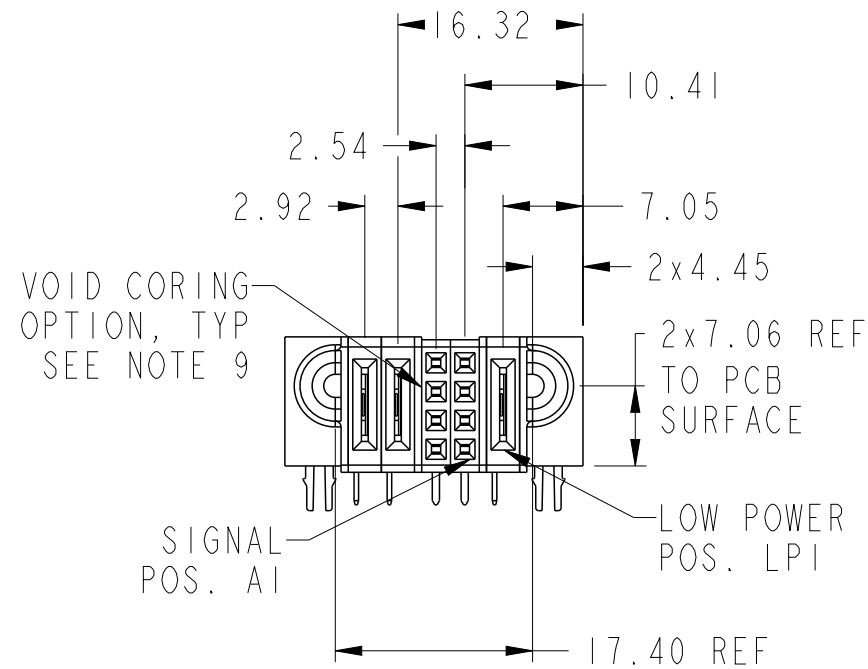


PRODUCT NUMBER SEE SHEET 2

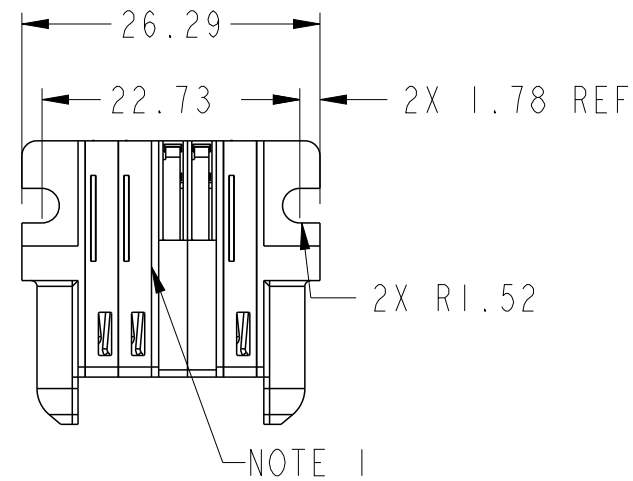

spec ref				dr	Vicking Liu	2016/07/07	projection	MM	size	A3	scale	3:2	
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Vicking Liu	2016/07/13			ecn no -				
				chr	Fancy Zhang	2016/07/13			rel level Released				
				appr	Pei-Ming Zheng	2016/07/13			product family PwrBlade+				
surface ✓ ASME Y14.5	linear	0.X	±0.5	Amphenol FCI	title ILP + 8S + 2LP				dwg no	10106264-0302001		rev	A
		0.XX	±0.25										
		0.XXX	±0.10		RA STB RECEPTACLE								
	angular	0°	±2°			cat. no.		Product - Customer Drw				sheet 1 of 3	


A

B

C

D

PRODUCT NO.	ROWS	LP		S		LP		
		E1	P3	P2	2	1	P1	E2
10106264-0302001LF	D C B A							




CODE	DESCRIPTION
E	STD SIGNAL CONTACT, ROW A
F	STD SIGNAL CONTACT, ROW B
G	STD SIGNAL CONTACT, ROW C
H	STD SIGNAL CONTACT, ROW D
HA	METAL HOLD DOWN
LR	STD LOW POWER CONTACT(3.43)

A

B

C

D

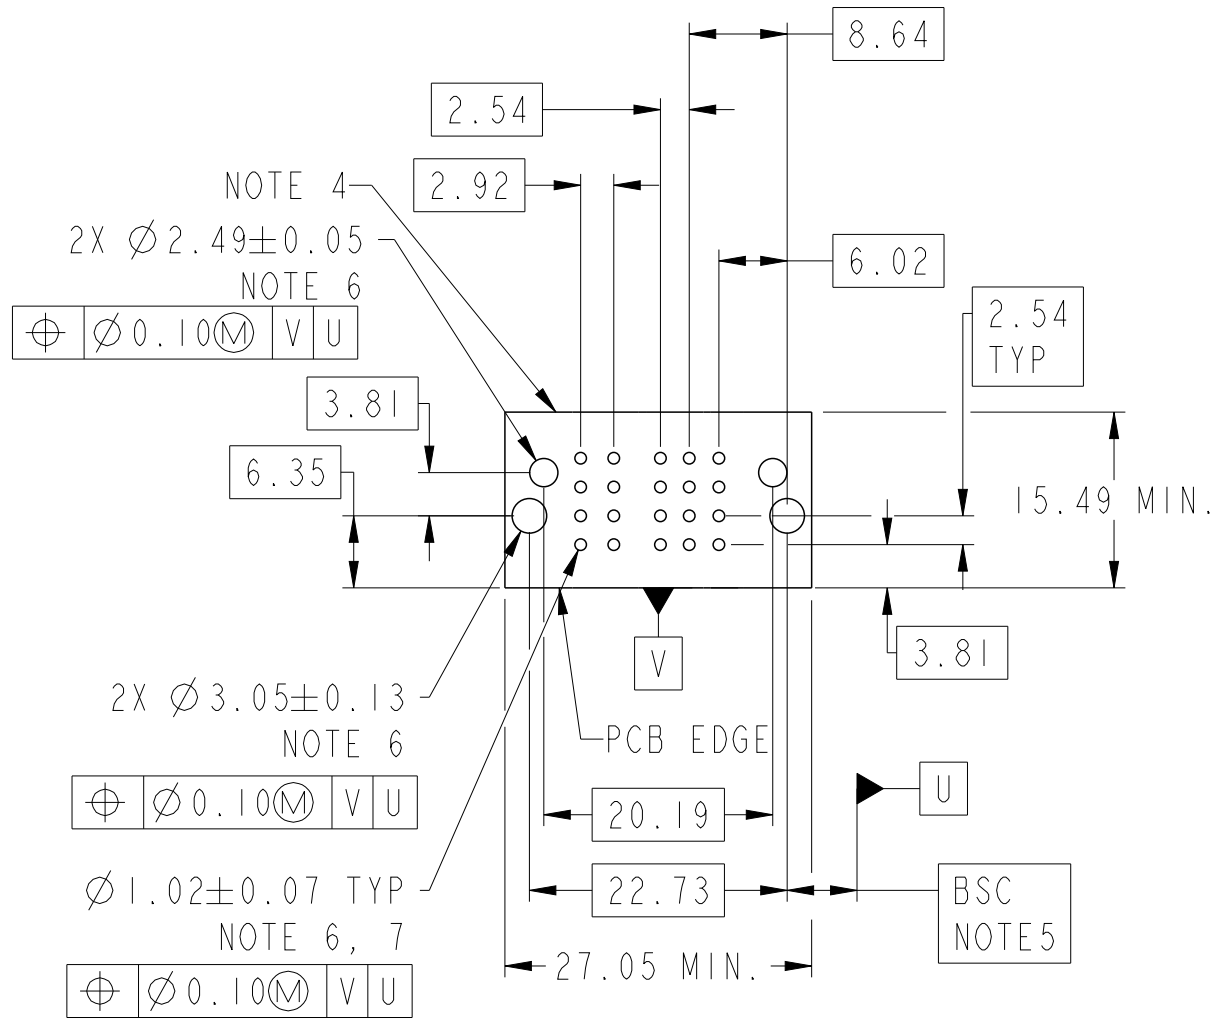

spec ref				dr		Vicking Liu	2016/07/07	projection		MM		size		A3	scale		3:2						
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED				eng		Vicking Liu	2016/07/13					ecn no				-					
ASME Y14.5						chr		Fancy Zhang	2016/07/13					rel level				Released					
						appr		Pei-Ming Zheng	2016/07/13					product family				PwrBlade+					
surface		linear		0.X		±0.5		Amphenol FCI		title		ILP + 8S + 2LP		dwg no		10106264-0302001		rev		A			
																				0.XX		±0.25	
																				0.XXX		±0.10	
ASME Y14.5		angular		0°		±2°				cat. no.		Product - Customer Drw				sheet 2 of 3							

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

spec ref				dr	Vicking Liu	2016/07/07	projection	MM	size	A3	scale	3:2	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Vicking Liu	2016/07/13			ecn no				-
ASME Y14.5				chr	Fancy Zhang	2016/07/13			rel level				Released
				appr	Pei-Ming Zheng	2016/07/13			product family				PwrBlade+
surface ASME Y14.5	linear	0.X	±0.5	Amphenol FCI	title ILP + 8S + 2LP RA STB RECEPTACLE				dwg no	10106264-0302001		rev	A
		0.XX	±0.25										
		0.XXX	±0.10										
	angular	0°	±2°		cat. no.		Product - Customer Drw				sheet 3 of 3		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9