

PRODUCT NO.
61729-*

PRODUCT NUMBER CODE:

61729 - X X X X X P S LF

BASE PRODUCT NUMBER

HOUSING COLOR OPTION

0 - WHITE
1 - BLACK

HALOGEN OPTION

0 - WITH HALOGEN
1 - HF (HALOGEN FREE)

SHIELD OPTION

1 - FULL BACK
2 - PARTIAL BACK
3 - FULL BACK (SPECIAL PLATING IN ONLY)
S - FULL BACK (SPECIAL MATERIAL FOR 12,000 DURABILITY CYCLES)
P - PARTIAL BACK (SPECIAL MATERIAL FOR 12,000 DURABILITY CYCLES)
Q - PARTIAL BACK WITH SHORT TAIL FOR TYPE 3

TERMINAL PLATING OPTION

0 - 50u" NI UNDERPLATED
30u" GXT CONTACT AREA
100u" PURE TIN TAIL AREA
1 - 50u" NI UNDERPLATED
30u" GOLD OR 30u" GXT CONTACT AREA
100u" PURE TIN TAIL AREA
2 - 50u" NI UNDERPLATED
GOLD FLASH CONTACT AREA
100u" PURE TIN TAIL AREA
3 - 50u" NI UNDERPLATED
30u" GOLD CONTACT AREA
100u" PURE TIN TAIL AREA

PACKAGING OPTION

B - TUBES
R - TAPE & REEL


DATE CODE OPTION

P - WITH DATE CODE

DEFAULT: WITHOUT DATE CODE

ONLY FOR PANSONIC

LEAD FREE OPTION


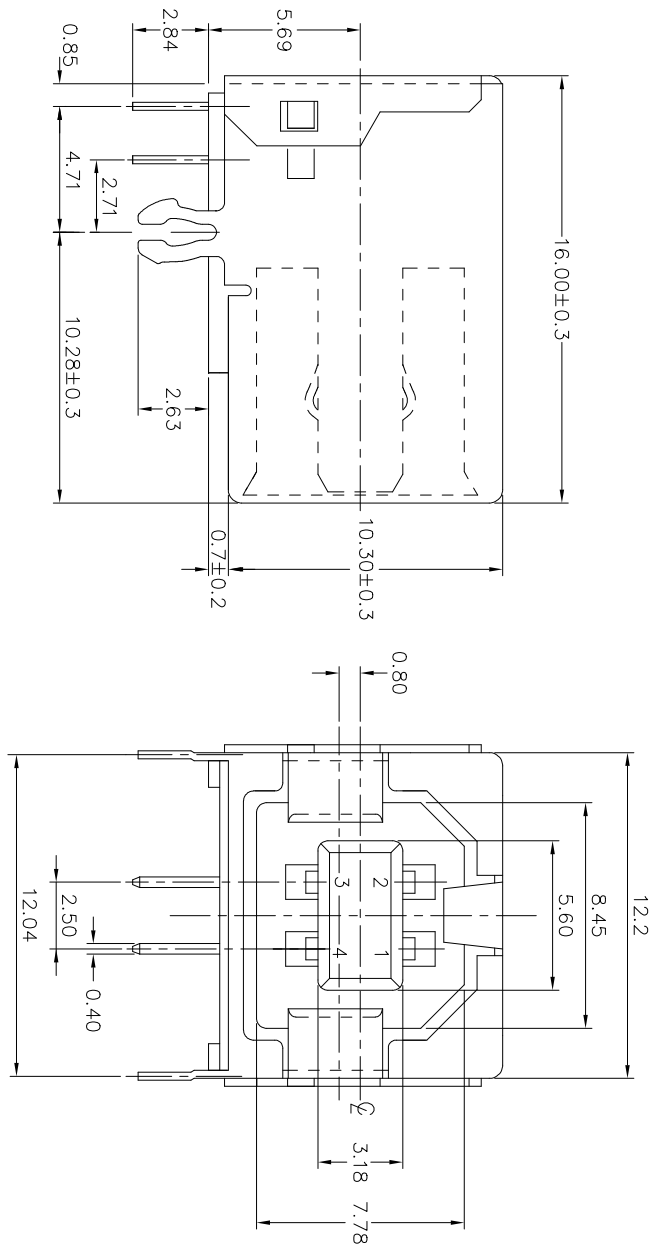


TYPE"1" FULL BACK

TYPE"2" PARTIAL BACK

TYPE"3" PARTIAL BACK WITH SHORT
SOLDER TAIL AND SHELL TAIL FOR
PIP PROCESS 61729-XXQXLF

mat'l. code				surface			tolerance	projection		product family	
				ISO 1302	✓	ISO 406	ISO 1108			HPL 511 USB2.0	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		scale 1:1		title	
S	N05-0242	PH	08/22/05	angles	linear	0.0±0.30			USB RECEPTACLE B TYPE		
T	N06-0103	HB	04/15/06			0.00±0.20					
U	N08-0238	RB	11/03/08	0±2°		0.000±0.10					
V	N08-0246	RB	12/08/08	dr	Yuan-Yuan Bao	02/26/19			dwg no		
W	ECR-N-16533	LQ	12/17/13	eng	Yuan-Yuan Bao	02/22/19			sheet 1 of 2		
X	ELX-N-29556	LZ	03/09/18	chr	Tim. Yao	02/26/19			size		
Y	ELX-N-32780	YY	02/26/19	pppd	Tim. Yao	02/26/19			A3		
sheet	revision								type		
index	sheet								Product Customer Drawing		

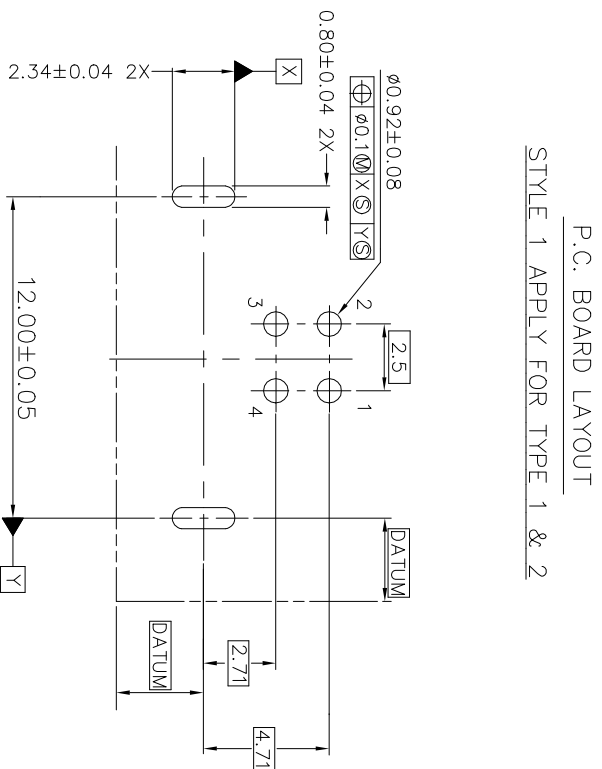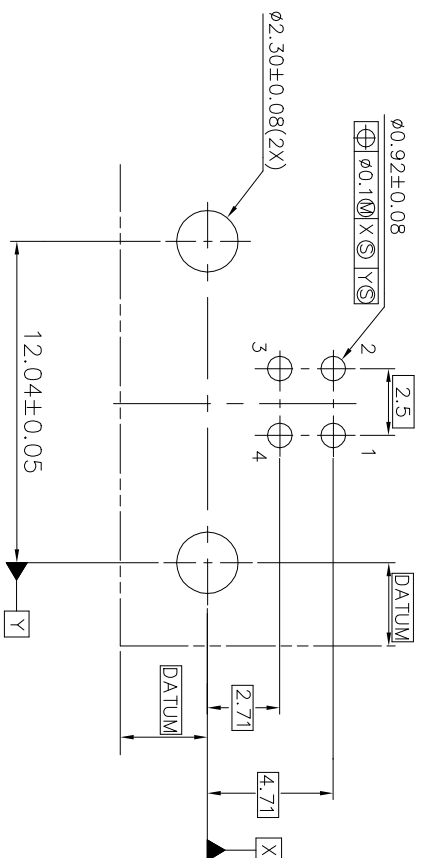

- NOTES:
1. MATERIAL:
SHIELD & CONTACTS: COPPER ALLOY
HOUSING: UL 94V-0 ,HIGH TEMPERATURE THERMOPLASTIC.
COLOR: SEE PRODUCT NUMBER CODE.
 2. PLATING: SEE PRODUCT NUMBER CODE.
SHIELD: BRIGHT TIN, NICKEL UNDERPLATE(USED FOR WAVE SOLDER PROCESS),
PLATING NICKEL ONLY(USED FOR PIP PROCESS).
 3. DATUMS & BASIC DIMENSIONS TO BE DETERMINED BY CUSTOMER
 4. RECOMMENDED BOARD THICKNESS IS 1.57 mm (.062)
 5. PACKING STANDARD GS-14-920 WILL BE APPLIED FOR LEAD FREE P/N'S
 6. FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
 7. FOR LEAD FREE P/N'S, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C
PEAK TEMPERATURE FOR 10 SECONDS IN A CONVECTION, INFRO-RED OR VAPOR
PHASE REFLOW OVEN.
 8. THE PART CAN BE USED FOR PIP PROCESS.

mat'l. code		surface		tolerance		projection		product family	
		ISO 1302		ISO 406 ISO				HPL 511 USB2.0	
litr ecn no		dr		date		tolerances unless otherwise specified		title	
Y				angles		0.0±0.30		USB RECEPTACLE B TYPE	
				linear		0.00±0.20			
				0±2°		0.000±0.10		dwg no	
				dr		Laurence.Zang02/26/19		sheet2 of 2	
				enql		Laurence.Zang02/26/19		61729	
				chr		Tim. Yao 02/26/19		A3	
				oppd		Tim. Yao 02/26/19		type Product Customer Drawing	
sheet index		revision sheet							

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9